


Circuit maker solutions

Screw-in cartridge valve packages for applications up to 350 bar (5000 psi) and 300 L/min (80 USgpm)

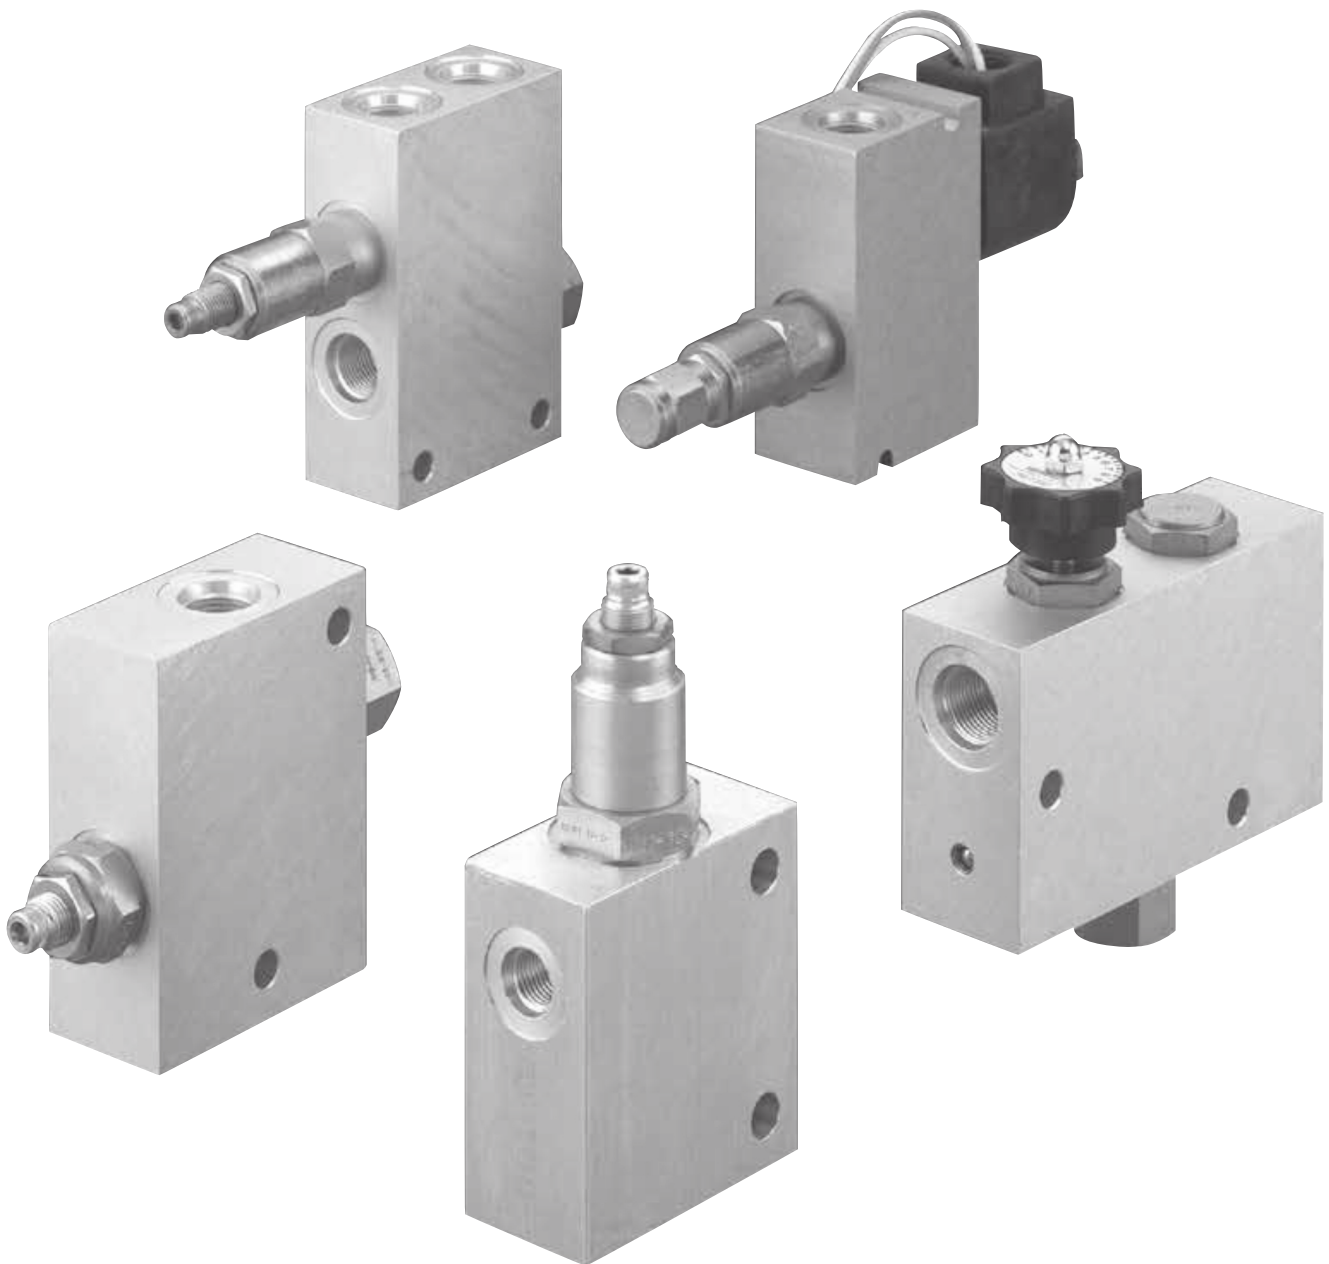

HYDRAULIC CONTROLS Pty Ltd





Circuit maker solutions

Circuit maker solutions.....	K-4	RGV-30 - Regenerative valve	K-54
FC-1 - Flow control.....	K-10	RGV-90 - Regenerative valve	K-56
FC-2 - Flow control.....	K-12	RLV-30 - Regenerative valve	K-58
FC-3 - Flow control.....	K-14	RLV-90 - Regenerative valve	K-60
FC-4 - Flow control.....	K-16	SCR-1 - Cross port relief	K-62
FRC-1 - Flow control.....	K-18	1UL255 - Unloading valve	K-64
FRC-2 - Flow control.....	K-20	Special housings - bolt on solutions.....	K67
FRC-3 - Flow control.....	K-22	Dual cross-over relief package for H&T series motors.....	K-68
FRC-4 - Flow control.....	K-24	Dual cross-over relief package for 2000 series disc valve motors	K69
PCC1-12 - Pump control.....	K-26	1CESHHT35/1CEESHHT35 - Motor mounted valves	K-70
PCC1-16 - Pump control.....	K-28	1CESH2K95/1CEESH2K95 - Motor mounted valves	K-72
PCC2-12 - Pump control.....	K-30	1CLLROMP150 - Motor mounted relief.....	K-74
PCC2-16 - Pump control.....	K-32	1CEOMP35/1CEEOMP35 - Motor mounted valves.....	K-78
PFRR-8 - Flow control	K-34	1CEHT35/1CEEHT35 - Motor mounted valves.....	K-79
PFRR-10 - Flow control.....	K-36	1CE2K95/1CEE2K95 - Motor mounted valves.....	K-81
PFRR-16 - Flow control	K-38	1CEOMP35/1CEEOMP35 - Motor mounted valves	K-83
SRV-8 - Unloading/Relief valve.....	K-40	1CESHOMP35/1CEESHOMP35 - Motor mounted valves	K-86
SRV-10 - Unloading/Relief valve	K-42	1CESHOMS95/1CEESHOMS95 - Motor mounted valves.....	K-88
SRV-12 - Solenoid vented relief valve.....	K-44		
SRV-16 - Solenoid vented relief valve.....	K-46		
SRV-20 - Solenoid vented relief valve.....	K-48		
CRV-10 - Relief valve.....	K-50		
CRV-16 - Relief valve	K-52		

Circuit maker solutions

Valve locator

Functional symbol

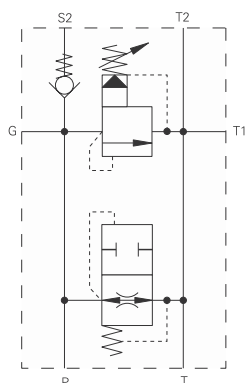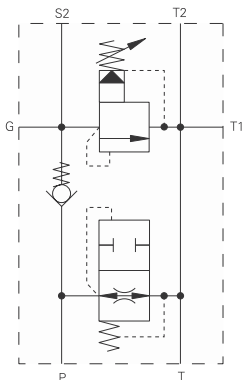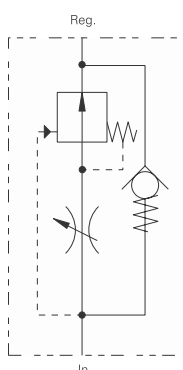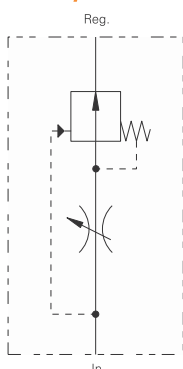

Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Flow control, full range adjustable</i>				
FC-1	Inline	36 (9)	210 (3000)	K-10
FC-2	Inline	57 (15)	210 (3000)	K-12
FC-3	Inline	114 (30)	210 (3000)	K-14
FC-4	Inline	190 (50)	210 (3000)	K-16





Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Flow control, full range adjustable</i>				
FRC-1	Inline	36 (9)	210 (3000)	K-18
FRC-2	Inline	57 (15)	210 (3000)	K-20
FRC-3	Inline	114 (30)	210 (3000)	K-22
FRC-4	Inline	190 (50)	210 (3000)	K-24

Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Pump control, single pump circulation</i>				
PCC1-12	Inline	114 (30)	210 (3000)	K-26
PCC1-16	Inline	228 (60)	210 (3000)	K-28

Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Pump control, single pump circulation</i>				
PCC2-12	Inline	114 (30)	5-210 (3000)	K-30
PCC2-16	Inline	228 (60)	10-210 (3000)	K-32

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

Functional symbol

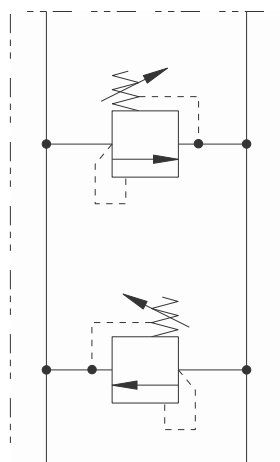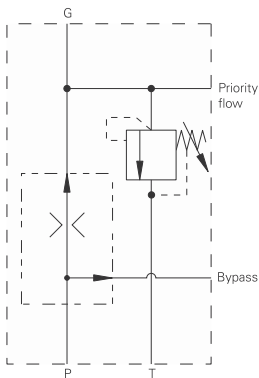

Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Flow control, relief on priority flow</i>				
PFRR-8	Inline	15 (4)	7-210 (3000)	K-34
PFRR-10	Inline	57 (15)	7-210 (3000)	K-36
PFRR-16	Inline	152 (40)	7-210 (3000)	K-38

Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Relief valve, solenoid actuated</i>				
SRV-8	Inline	23 (6)	210 (3000)	K-40
SRV-10	Inline	57 (15)	210 (3000)	K-42
SRV-12	Inline	114 (30)	210 (3000)	K-44
SRV-16	Inline	225 (60)	210 (3000)	K-46
SRV-20	Inline	300 (80)	210 (3000)	K-48



Model	Cavity	Flow rating	Typical pressure	Page
		L/min (USgpm)	bar (psi)	
<i>Cross port relief</i>				
CRV-10	Inline	26 (20)	210 (3000)	K-50
CRV-16	Inline	303 (80)	172 (2500)	K-52

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

Circuit maker solutions

Valve locator

Functional symbol


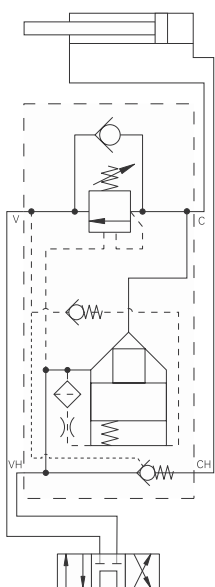
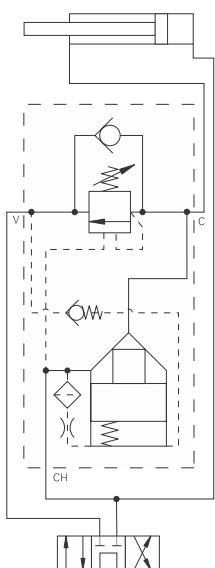


Model	Cavity	Flow rating	Typical pressure	Page
<i>Regenerative valve, pressure</i>		L/min (USgpm)	bar (psi)	
RGV-30	Inline	57 (15)	210 (3000)	K-54
RGV-90	Inline	114 (30)	210 (3000)	K-56

Model	Cavity	Flow rating	Typical pressure	Page
<i>Regenerative valve, pressure</i>		L/min (USgpm)	bar (psi)	
RLV-30	Inline	57 (15)	210 (3000)	K-58
RLV-90	Inline	114 (30)	210 (3000)	K-60

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

Functional symbol

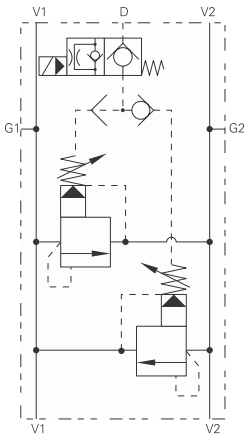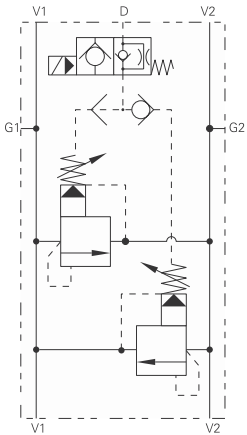

Model	Cavity	Flow rating	Typical pressure	Page
<i>Relief valve, cross port solenoid</i>		L/min (USgpm)	bar (psi)	
SCR-1		114 (30)	210 (3000)	K-62


Model	Cavity	Flow rating	Typical pressure	Page
<i>Unloading valve</i>		L/min (USgpm)	bar (psi)	
1UL255		200 (52)	350 (5000)	K-64

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.


Circuit maker solutions

Valve locator


Functional symbol

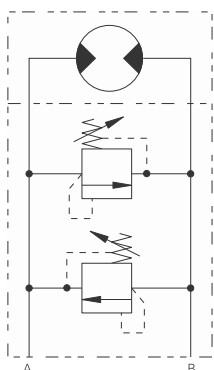


Model	Cavity	Flow rating	Typical pressure	Page
<i>Motor mounted relief</i>		L/min (USgpm)	bar (psi)	
H & T Motors		76 (20)	210 (3000)	K-68
2000 Motors		76 (20)	210 (3000)	K-69
OMP		150 (40)	350 (5000)	K-74
OMS		150 (40)	350 (5000)	K--



Model	Cavity	Flow rating	Typical pressure	Page
<i>Motor mounted OCV with brake shuttle</i>		L/min (USgpm)	bar (psi)	
H & T Motors		60 (15)	210 (3000)	K-70
2000 Motors		60 (15)	210 (3000)	K-72
OMP		30 (8)	270 (4000)	K-74
OMS		90 (23)	270 (4000)	K-76



Model	Cavity	Flow rating	Typical pressure	Page
<i>Motor mounted P.O. check with brake shuttle</i>		L/min (USgpm)	bar (psi)	
H & T Motors		60 (15)	210 (3000)	K-78
2000 Motors		60 (15)	210 (3000)	K-80



Model	Cavity	Flow rating	Typical pressure	Page
<i>Motor mounted OCV</i>		L/min (USgpm)	bar (psi)	
OMP		30 (8)	270 (4000)	K-83
OMS		90 (23)	270 (4000)	K-85

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

What are circuit makers?

Circuit Maker Products are pre-engineered packages. These packages are designed with from 2 to 4 screw-in cartridge valves for generic, repetitive circuit control functions.

All of the products in this catalog are rated at 210 bar (3000 psi) and have either SAE or BSPP port options. Our selection of Circuit Maker pre-engineered packages consists of the following basic units:

- Single and multiple pump control packages
- Solenoid actuated relief valve packages
- Flow control packages
- Cross port relief packages
- Cross port relief with shuttle and solenoid vent
- Pressure sensitive regeneration packages with and without load locking
- Motor mounted counterbalance valve
- Motor mounted PO check valves
- Motor mounted relief valves

Typical applications

Circuit Maker packages can be used in a wide variety of stationary and, on and off highway applications. They are designed to solve a multitude of repeatable, generic application requirements that are encountered in day to day hydraulic circuits. These packages are ideal solutions for specialty machine requirements and low volume options on high volume applications.

Pump control packages –

These are suitable for any single or multiple pump application where individual pump output flow does not exceed 228 l/min (60 USgpm). They are used to provide air-bleed, start-up and relief protection.

Solenoid actuated relief valve packages –

These can be used wherever remote relief or venting control is required for flows up to 300 L/min (80 USgpm). Normally open versions lend themselves to markets where fail safe and “dead man” control are important. Normally closed versions lend themselves to markets such as machine tool, where energy savings can be obtained by selective unloading of pump flow.

Flow control packages –

These packages are used with both fixed and variable pump systems to provide constant output flow for the main or branch circuits. Packages offered provide for maintaining either:

- Cylinder or motor speed; free reverse flow for table positioning, conveyor systems and presses.
- Controlled flow for steering systems.

Cross port relief valve packages –

These packages are used with bi-directional actuators. The circuit maker provides actuator protection from overload conditions.

Pressure sensitive regeneration packages –

Pressure sensitive regeneration packages provide a means of extending a cylinder as fast as possible without additional pump flow by diverting rod end flow to the head end to accelerate the load. When the pressure in the head end reaches a predetermined level related to the load, the valve closes off and the cylinder returns to normal speed. Typical applications are for outriggers/stabilizers in mobile markets and machine tool traverse in industrial markets.

Pressure sensitive regeneration packages with load locking –

Pressure sensitive regeneration packages provide a means of extending a cylinder as fast as possible without additional pump flow by diverting rod end flow to the head end to accelerate the load. When the pressure in the head end reaches a predetermined level related to the load, the valve closes off and the cylinder returns to normal speed. The load locking feature provides stability as the system is now working with an oil column under pressure in addition to the mechanical structure. Typically used with mobile crane and other similar vehicles to ensure stability when swinging loads. This package has an advantage over alternative systems that use solenoid actuated blocking pins. In the event of a power failure, it is still possible to lower the vehicle/load.

Features and Benefits

- Quick solutions that are ready to use
- Quick delivery at low cost
- Flexibility

Quick solutions:

Circuit Maker packages are pre-engineered packaged solutions for generic, repeatable requirements. They have specific coil voltage, coil connector, flow settings adjustment and pressure setting adjustment options that permit tailoring to application requirements.

Quick delivery/low cost:


Circuit Maker packages have already been engineered to satisfy generic, repetitive circuit needs. There are no scheduling or time related problems, or engineering charges to be recovered.

Flexibility:

Screw-in cartridge valves and housings are sold either separately or as pre-assembled packages. This permits last minute assembly of packages and local tailoring of individual valve options.

FC-1 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 36 L/min (9 USgpm) • 210 bar (3000 psi)

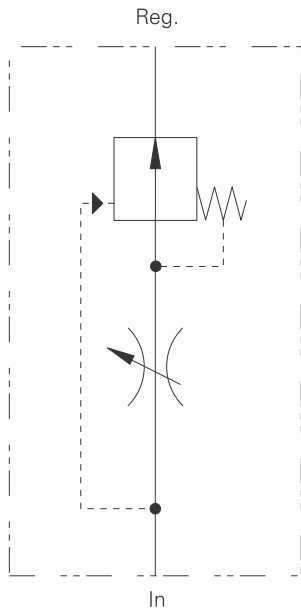

Operation

This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cST (105 SUS) and 49° C (120°F)


Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 36 L/min (9 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Viton is a registered trademark of E. I. DuPont

Description

Full range adjustable restrictive pressure compensated flow control package

Performance characteristics

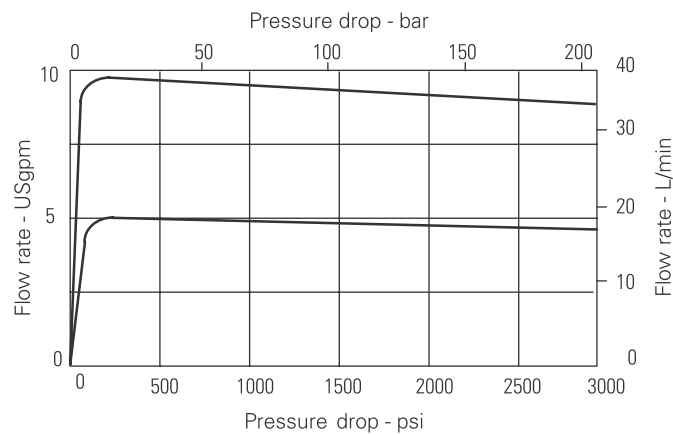


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-1 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 36 L/min (9 USgpm) • 210 bar (3000 psi)

Model code




<p>1 Function FC - Fully adjustable pressure compensated flow control</p> <hr/> <p>2 Maximum rated flow 1 - 34 L/min (9 USgpm)</p> <hr/> <p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E. I. DuPont.</p>	<p>4 Valve housing material A - Aluminum</p> <hr/> <p>5 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Port size</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>4G</td> <td>1/2" BSPP</td> <td>02-178279</td> </tr> <tr> <td>8T</td> <td>SAE 8</td> <td>02-178280</td> </tr> </tbody> </table> <hr/> <p>6 Adjustment type</p> <table border="1"> <thead> <tr> <th>Adjustment type</th> <th>Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob*</td> <td>19 L/min (5 USgpm)</td> </tr> <tr> <td>K2 - Knob</td> <td>34 L/min (9 USgpm)</td> </tr> <tr> <td>S1 - Screw</td> <td>34 L/min (9 USgpm)</td> </tr> <tr> <td>H1 - Handwheel</td> <td>34 L/min (9 USgpm)</td> </tr> </tbody> </table> <p>*180° rotation</p>	Code	Port size	Housing number	4G	1/2" BSPP	02-178279	8T	SAE 8	02-178280	Adjustment type	Flow rate	K1 - Knob*	19 L/min (5 USgpm)	K2 - Knob	34 L/min (9 USgpm)	S1 - Screw	34 L/min (9 USgpm)	H1 - Handwheel	34 L/min (9 USgpm)	<p>7 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>
Code	Port size	Housing number																			
4G	1/2" BSPP	02-178279																			
8T	SAE 8	02-178280																			
Adjustment type	Flow rate																				
K1 - Knob*	19 L/min (5 USgpm)																				
K2 - Knob	34 L/min (9 USgpm)																				
S1 - Screw	34 L/min (9 USgpm)																				
H1 - Handwheel	34 L/min (9 USgpm)																				

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 Knob	MRV2-10-K-0-05	Flow restrictor, adjustable, semi-rotary spool	19 L/min (5 USgpm)
K2 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	34 L/min (9 USgpm)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	34 L/min (9 USgpm)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	34 L/min (9 USgpm)
-	PCS3-10-0-80	Pressure compensator, spool type	40 L/min (12 USgpm)

Dimensions


mm (inch)

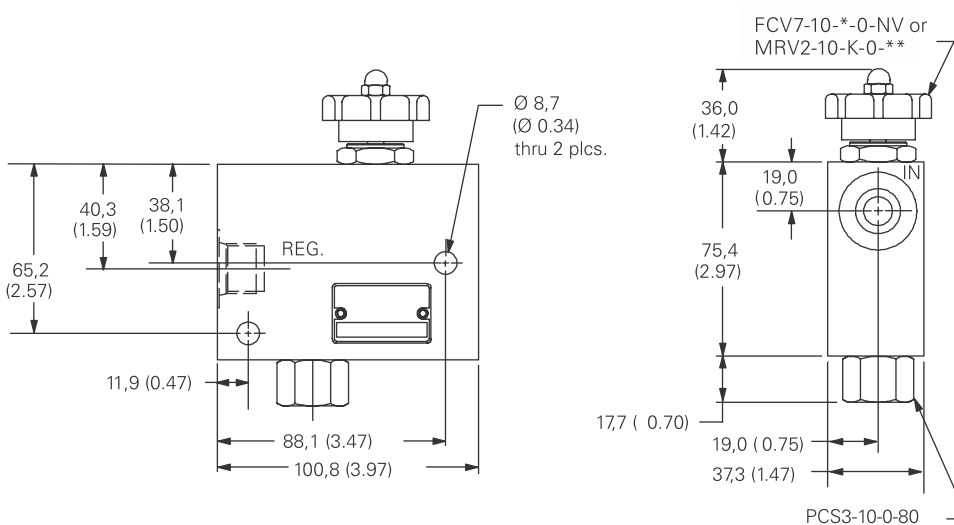

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-2 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 57 L/min (15 USgpm) • 210 bar (3000 psi)

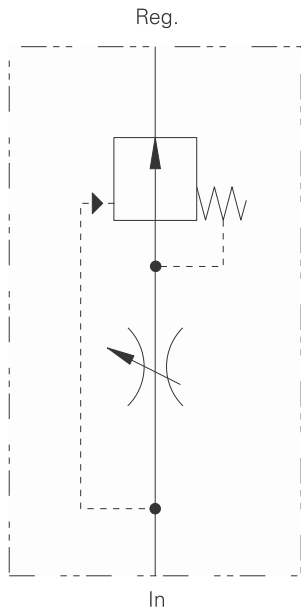

Operation

This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 57 L/min (15 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package.

Performance characteristics

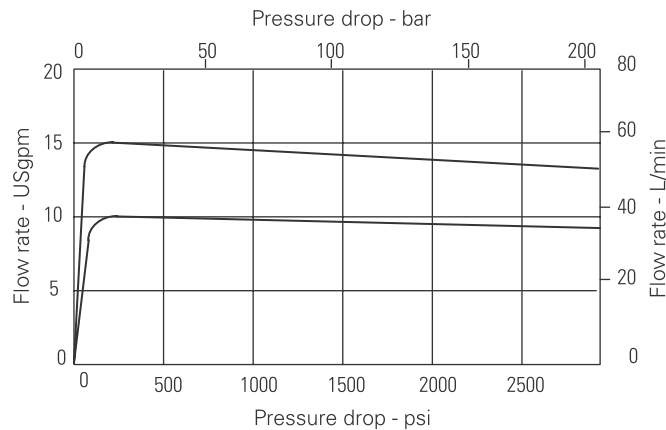


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-2 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 57 L/min (15 USgpm) • 210 bar (3000 psi)

Model code



1 Function

FC - Fully adjustable pressure compensated flow control

2 Maximum rated flow

2 - 57 L/min (15 USgpm)

3 Seal material

Blank - Buna-N
V - Viton®

Viton is a registered trademark of E.I. DuPont

4 Valve housing material

A - Aluminum

5 Port size

Code	Port size	Housing number
6G	3/4" BSPP	02-178281
12T	SAE 12	02-178282

6 Adjustment type

K1 - Knob*

K2 - Knob

S1 - Screw

H1 - Handwheel

*180° rotation

Flow rate

38 L/min (10 USgpm)

57 L/min (15 USgpm)

57 L/min (15 USgpm)

57 L/min (15 USgpm)

7 Special features

00 - None


(Only required if valve has special features, omitted if "00".)

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	38 L/min (10 USgpm)
K2 - Knob	MRV2-10-K-0-15	Flow restrictor, adjustable, semi-rotary spool	57 L/min (15 USgpm)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	57 L/min (15 USgpm)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	57 L/min (15 USgpm)
-	PCS3-16-0-80	Pressure compensator, spool type	114 L/min (30 USgpm)

Dimensions


mm (inch)

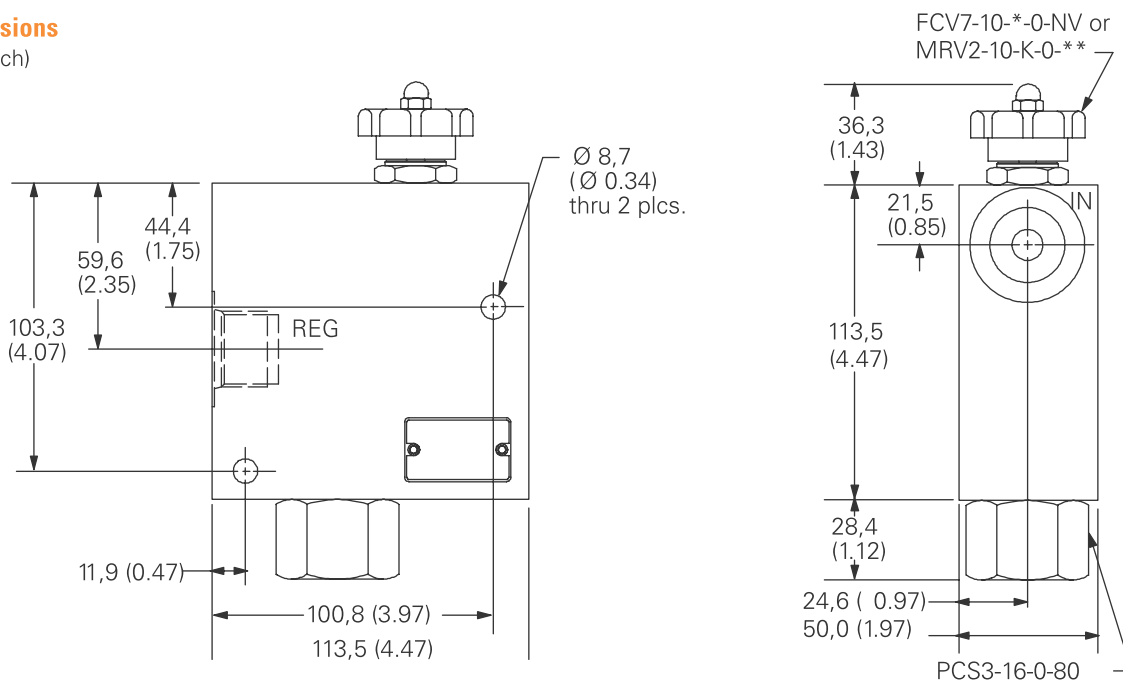

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-3 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 114 L/min (30 USgpm) • 210 bar (300 psi)

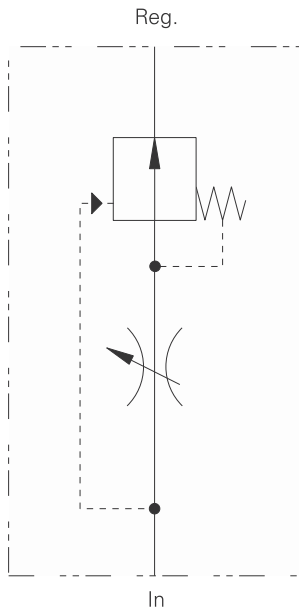

Operation

This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 114 L/min (30 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package.

Performance characteristics

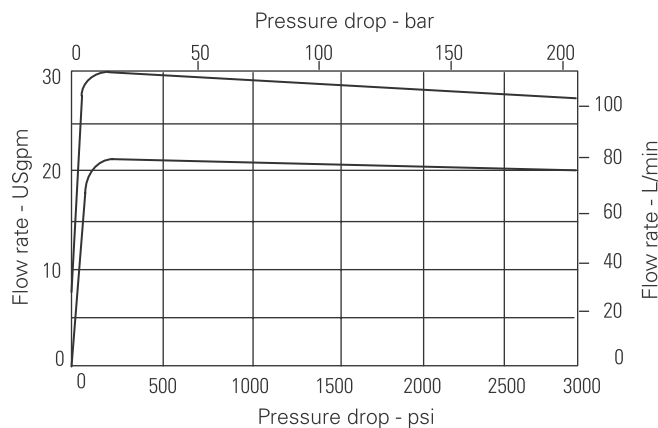


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-3 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 114 L/min (30 USgpm) • 210 bar (300 psi)

Model code

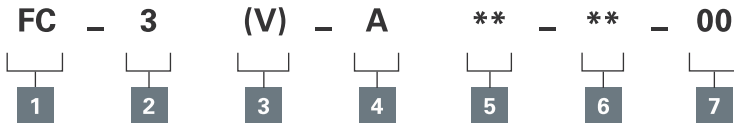

1 Function

FC - Fully adjustable pressure compensated flow control

2 Maximum rated flow

3 - 114 L/min (30 USgpm)

3 Seal material

Blank - Buna-N

V - Viton®

Viton is a registered trademark of E.I. DuPont

4 Valve housing material

A - Aluminum

5 Port size

Code	Port size	Housing number
8G	1" BSPP	02-178283
16T	SAE 16	02-178284

6 Adjustment type

K1 - Knob*

K2 - Knob

S1 - Screw

H1 - Handwheel

*180° rotation

Flow rate

76 L/min (20 USgpm)

114 L/min (30 USgpm)

114 L/min (30 USgpm)

114 L/min (30 USgpm)

7 Special features

00 - None



(Only required if valve has special features, omitted if "00".)

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	MRV2-16-K-0-20	Flow restrictor, adjustable, semi-rotary spool	76 L/min (20 USgpm)
K2 - Knob	MRV2-16-K-0-30	Flow restrictor, adjustable, semi-rotary spool	114 L/min (30 USgpm)
S1 - Screw	FCV6-16-S-0-NV	Flow restrictor, adjustable	114 L/min (30 USgpm)
H1 - Hand Knob	FCV6-16-K-0-NV	Flow restrictor, adjustable	114 L/min (30 USgpm)
-	PCS3-16-0-80	Pressure compensator, spool type	114 L/min (30 USgpm)

Dimensions


mm (inch)

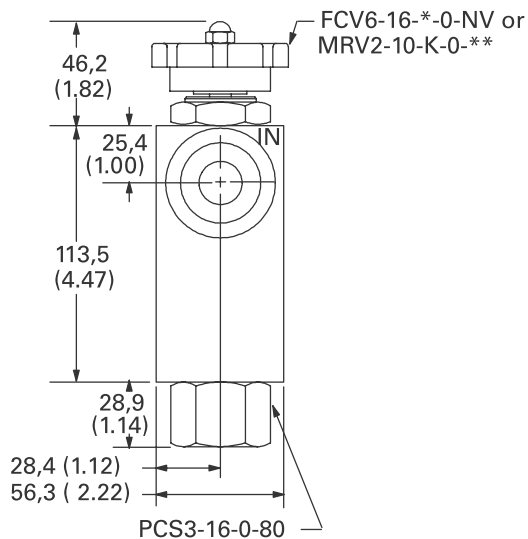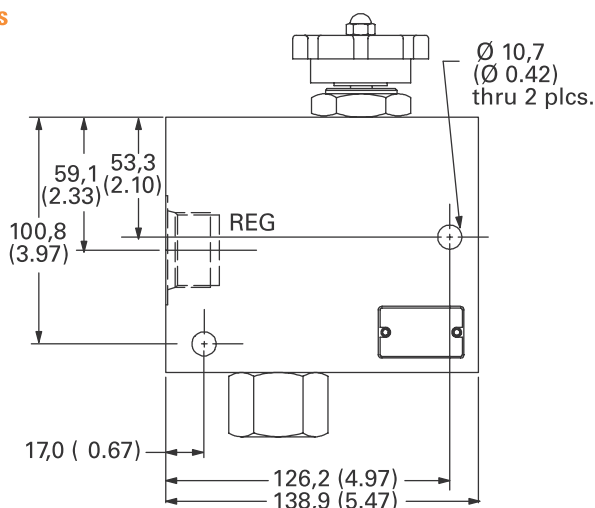

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-4 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 190 L/min (50 USgpm) • 210 bar (3000 psi)

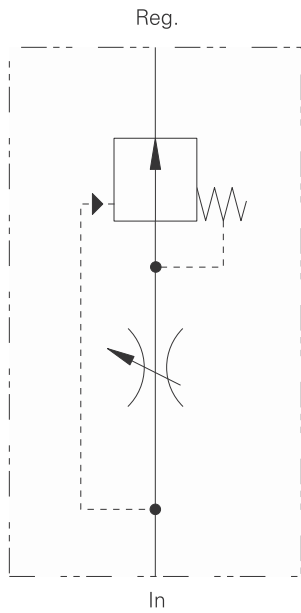

Operation

This standard valve package is used in a circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 190 L/min (50 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package.

Pressure Characteristics

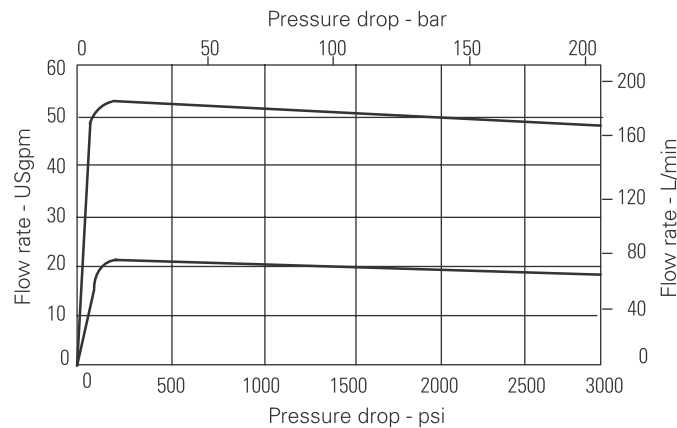


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FC-4 - Flow control

Pressure compensated, restrictive type, full range adjustable up to 190 L/min (50 USgpm) • 210 bar (3000 psi)

Model code




<p>1 Function FC - Fully adjustable pressure compensated flow control</p> <hr/> <p>2 Size 4 - 190 L/min (50 USgpm)</p> <hr/> <p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>	<p>4 Valve housing material A - Aluminum</p> <hr/> <p>5 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Port size</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>12G</td> <td>1 1/4" BSPP</td> <td>02-178285</td> </tr> <tr> <td>20T</td> <td>SAE 20</td> <td>02-178286</td> </tr> </tbody> </table> <hr/> <p>6 Adjustment type</p> <table border="1"> <thead> <tr> <th>Adjustment type</th> <th>Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob* *180° rotation</td> <td>190 L/min (50 USgpm)</td> </tr> </tbody> </table>	Code	Port size	Housing number	12G	1 1/4" BSPP	02-178285	20T	SAE 20	02-178286	Adjustment type	Flow rate	K1 - Knob* *180° rotation	190 L/min (50 USgpm)	<p>7 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>
Code	Port size	Housing number													
12G	1 1/4" BSPP	02-178285													
20T	SAE 20	02-178286													
Adjustment type	Flow rate														
K1 - Knob* *180° rotation	190 L/min (50 USgpm)														

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	NV1-20-K-0	Needle Valve	190 L/min (50 USgpm)
-	PCS3-20-0-80	Pressure compensator, spool type	200 L/min (53 USgpm)

Dimensions


mm (inch)

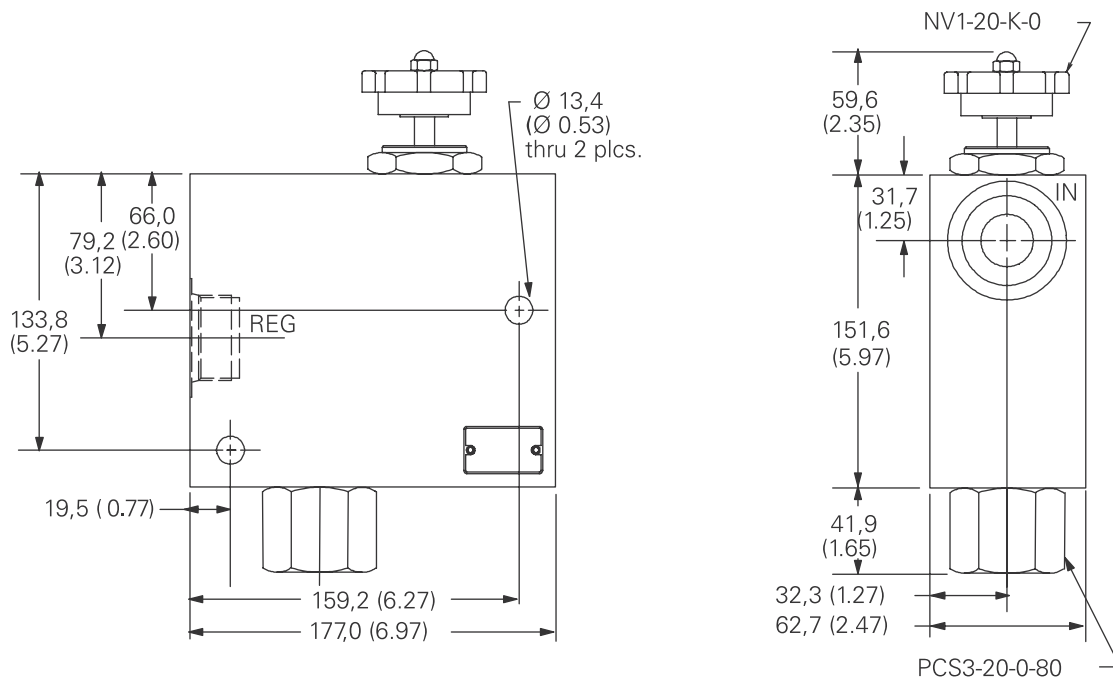

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-1 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 36 L/min (9 USgpm) • 210 bar (3000 psi)

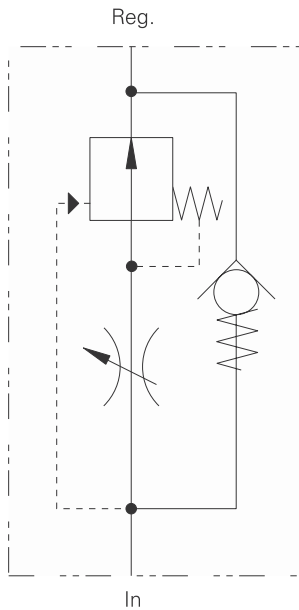

Operation

This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required. It also provides free reverse flow.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 36 L/min (9 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package with free reverse flow.

Performance characteristics

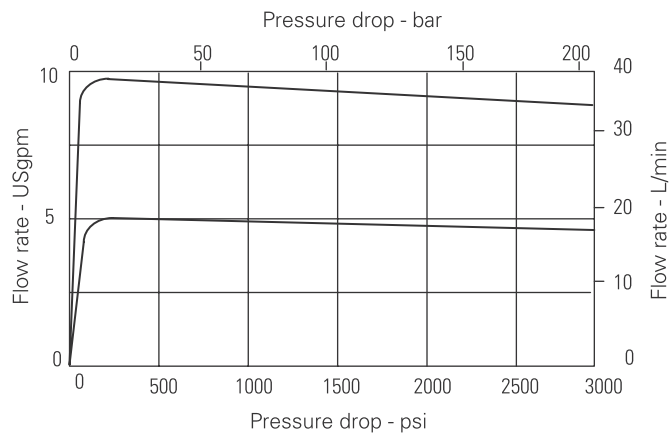


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-1 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 36 L/min (9 USgpm) • 210 bar (3000 psi)

Model code




<p>1 Function FRC- Fully adjustable pressure compensated flow control with reverse flow check</p>	<p>4 Valve housing material A - Aluminum</p>	<p>7 Special features 00 - None <small>(Only required if valve has special features, omitted if "00".)</small></p>										
<p>2 Maximum rated flow 1 - 34 L/min (9 USgpm)</p>	<p>5 Port size</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Code</th> <th style="text-align: left;">Port size</th> <th style="text-align: left;">Housing number</th> </tr> </thead> <tbody> <tr> <td>4G</td> <td>1/2" BSPP</td> <td>02-178287</td> </tr> <tr> <td>8T</td> <td>SAE 8</td> <td>02-178288</td> </tr> </tbody> </table>		Code	Port size	Housing number	4G	1/2" BSPP	02-178287	8T	SAE 8	02-178288	
Code	Port size	Housing number										
4G	1/2" BSPP	02-178287										
8T	SAE 8	02-178288										
<p>3 Seal material Blank - Buna-N V - Viton® <small>Viton is a registered trademark of E.I. DuPont</small></p>	<p>6 Adjustment type</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Adjustment type</th> <th style="text-align: left;">Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob*</td> <td>19 L/min (5 USgpm)</td> </tr> <tr> <td>K2 - Knob</td> <td>34 L/min (9 USgpm)</td> </tr> <tr> <td>S1 - Screw</td> <td>34 L/min (9 USgpm)</td> </tr> <tr> <td>H1 - Handwheel</td> <td>34 L/min (9 USgpm)</td> </tr> </tbody> </table> <p><small>*180° rotation</small></p>		Adjustment type	Flow rate	K1 - Knob*	19 L/min (5 USgpm)	K2 - Knob	34 L/min (9 USgpm)	S1 - Screw	34 L/min (9 USgpm)	H1 - Handwheel	34 L/min (9 USgpm)
Adjustment type	Flow rate											
K1 - Knob*	19 L/min (5 USgpm)											
K2 - Knob	34 L/min (9 USgpm)											
S1 - Screw	34 L/min (9 USgpm)											
H1 - Handwheel	34 L/min (9 USgpm)											

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	MRV2-10-K-0-05	Flow restrictor, adjustable, semi-rotary spool	19 L/min (5 USgpm)
K2 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	34 L/min (9 USgpm)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	34 L/min (9 USgpm)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	34 L/min (9 USgpm)
-	CV3-10-P-0-10	Check valve	76 L/min (20 USgpm)
-	PCS3-10-0-80	Pressure compensator, spool type	40 L/min (12 USgpm)

Dimensions


mm (inch)

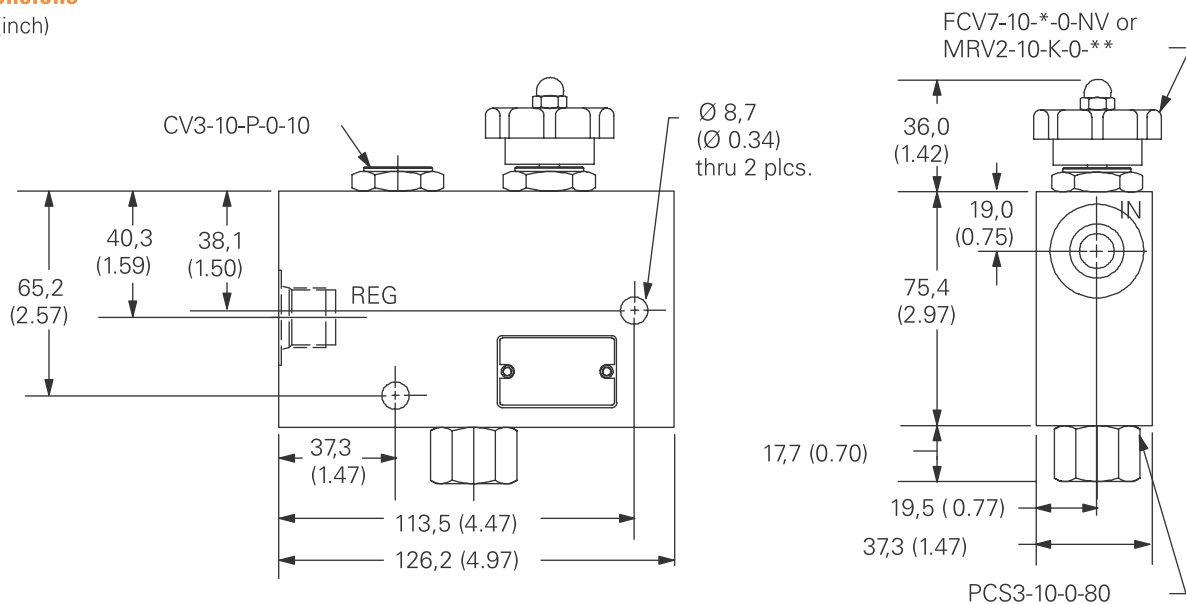

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-2 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
 Up to 57 L/min (15 USgpm) • 210 bar (3000 psi)

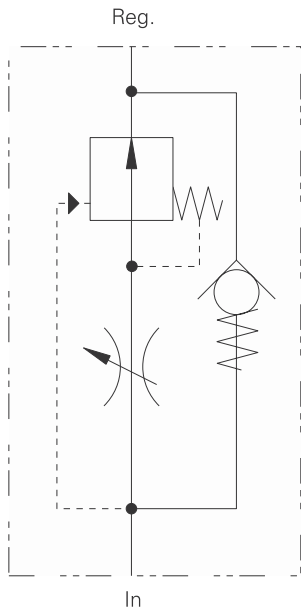

Operation

This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required. It also provides free reverse flow.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 57 L/min (15 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package with free reverse flow.

Performance characteristics

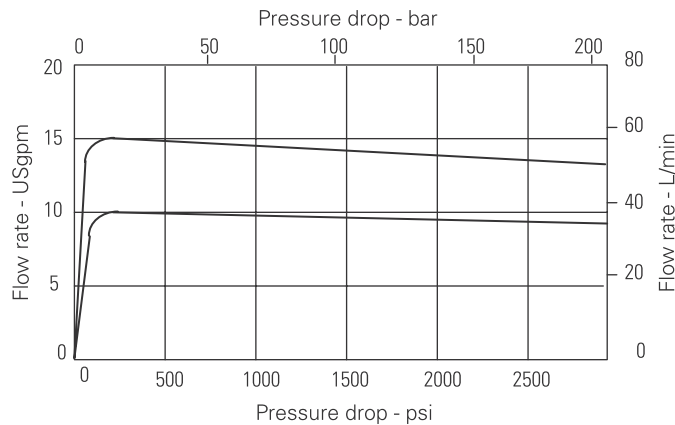


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-2 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 57 L/min (15 USgpm) • 210 bar (3000 psi)

Model code




<p>1 Function FRC- Fully adjustable pressure compensated flow control with reverse flow check</p>	<p>4 Valve housing material A - Aluminum</p>	<p>7 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>										
<p>2 Maximum rated flow 2 - 57 L/min (15 USgpm)</p>	<p>5 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Port size</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>6G</td> <td>3/4" BSPP</td> <td>02-178289</td> </tr> <tr> <td>12T</td> <td>SAE 12</td> <td>02-178290</td> </tr> </tbody> </table>		Code	Port size	Housing number	6G	3/4" BSPP	02-178289	12T	SAE 12	02-178290	
Code	Port size	Housing number										
6G	3/4" BSPP	02-178289										
12T	SAE 12	02-178290										
<p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>	<p>6 Adjustment type</p> <table border="1"> <thead> <tr> <th>Adjustment type</th> <th>Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob*</td> <td>38 L/min (10 USgpm)</td> </tr> <tr> <td>K2 - Knob</td> <td>57 L/min (15 USgpm)</td> </tr> <tr> <td>S1 - Screw</td> <td>57 L/min (15 USgpm)</td> </tr> <tr> <td>H1 - Handwheel</td> <td>57 L/min (15 USgpm)</td> </tr> </tbody> </table> <p>*180° rotation</p>		Adjustment type	Flow rate	K1 - Knob*	38 L/min (10 USgpm)	K2 - Knob	57 L/min (15 USgpm)	S1 - Screw	57 L/min (15 USgpm)	H1 - Handwheel	57 L/min (15 USgpm)
Adjustment type	Flow rate											
K1 - Knob*	38 L/min (10 USgpm)											
K2 - Knob	57 L/min (15 USgpm)											
S1 - Screw	57 L/min (15 USgpm)											
H1 - Handwheel	57 L/min (15 USgpm)											

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	MRV2-10-K-0-10	Flow restrictor, adjustable, semi-rotary spool	38 L/min (10 USgpm)
K2 - Knob	MRV2-10-K-0-15	Flow restrictor, adjustable, semi-rotary spool	57 L/min (15 USgpm)
S1 - Screw	FCV7-10-S-0-NV	Flow restrictor, adjustable, needle type	57 L/min (15 USgpm)
H1 - Hand Knob	FCV7-10-K-0-NV	Flow restrictor, adjustable, needle type	57 L/min (15 USgpm)
-	CV3-10-P-0-10	Check valve	76 L/min (20 USgpm)
-	PCS3-16-0-80	Pressure compensator, spool type	114 L/min (30 USgpm)

Dimensions


mm (inch)

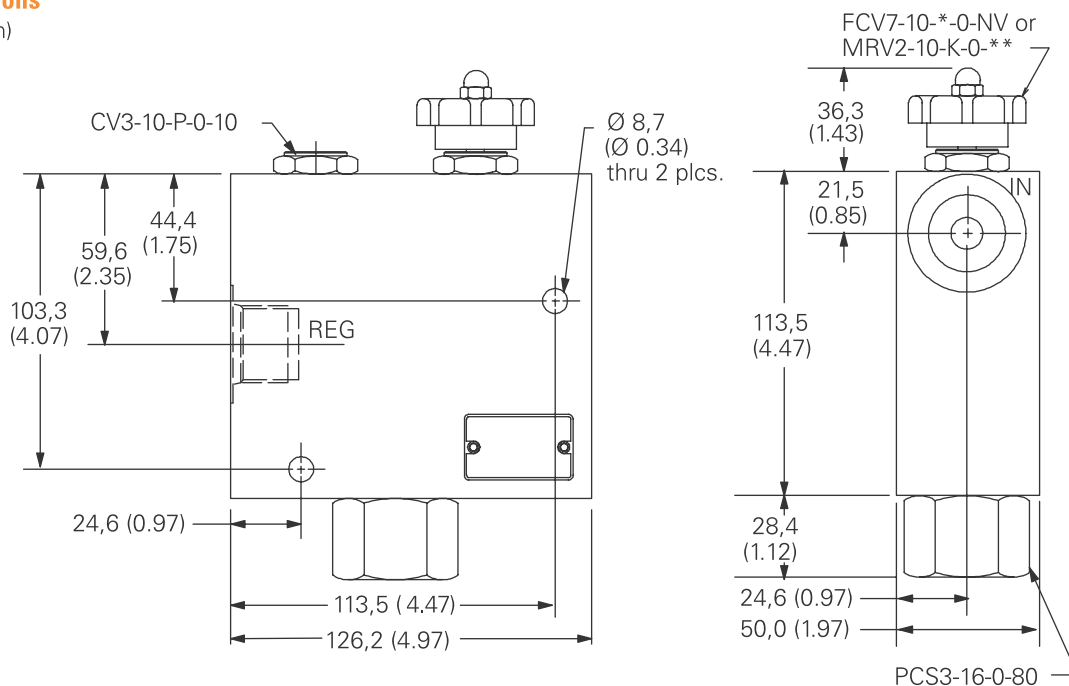

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-3 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 114 L/min (30 USgpm) • 210 bar (3000 psi)

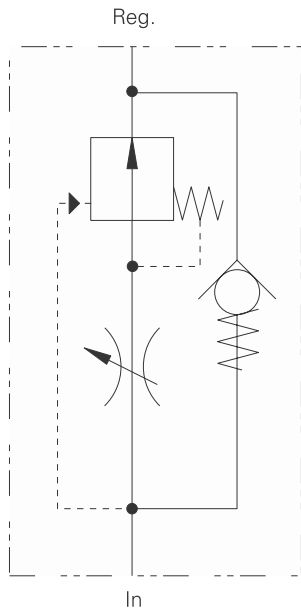

Operation

This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required. It also provides free reverse flow.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 114 L/min (30 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package with free reverse flow.

Performance characteristics

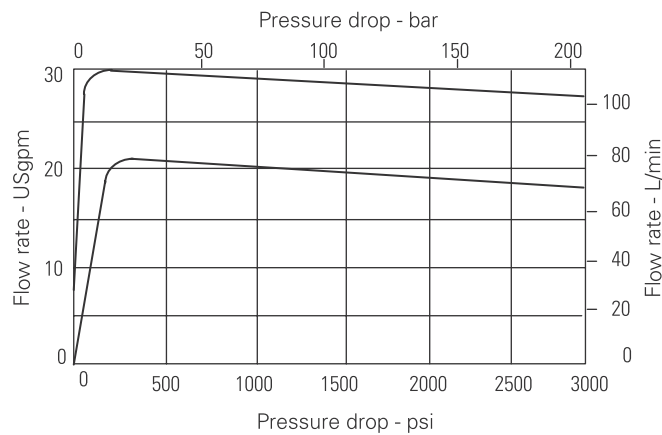


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-3 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 114 L/min (30 USgpm) • 210 bar (3000 psi)

Model code




<p>1 Function FRC- Fully adjustable pressure compensated flow control with reverse flow check</p>	<p>4 Valve housing material A - Aluminum</p>	<p>7 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>										
<p>2 Maximum rated flow 3 - 115 L/min (30 USgpm)</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Code</th> <th style="text-align: left;">Port size</th> <th style="text-align: left;">Housing number</th> </tr> </thead> <tbody> <tr> <td>8G</td> <td>1" BSPP</td> <td>02-178291</td> </tr> <tr> <td>16T</td> <td>SAE 16</td> <td>02-178292</td> </tr> </tbody> </table>		Code	Port size	Housing number	8G	1" BSPP	02-178291	16T	SAE 16	02-178292	
Code	Port size	Housing number										
8G	1" BSPP	02-178291										
16T	SAE 16	02-178292										
<p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">6 Adjustment type</th> <th style="text-align: left;">Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob*</td> <td>76 L/min (20 USgpm)</td> </tr> <tr> <td>K2 - Knob</td> <td>114 L/min (30 USgpm)</td> </tr> <tr> <td>S1 - Screw</td> <td>114 L/min (30 USgpm)</td> </tr> <tr> <td>H1 - Handwheel</td> <td>114 L/min (30 USgpm)</td> </tr> </tbody> </table> <p>*180° rotation</p>		6 Adjustment type	Flow rate	K1 - Knob*	76 L/min (20 USgpm)	K2 - Knob	114 L/min (30 USgpm)	S1 - Screw	114 L/min (30 USgpm)	H1 - Handwheel	114 L/min (30 USgpm)
6 Adjustment type	Flow rate											
K1 - Knob*	76 L/min (20 USgpm)											
K2 - Knob	114 L/min (30 USgpm)											
S1 - Screw	114 L/min (30 USgpm)											
H1 - Handwheel	114 L/min (30 USgpm)											

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	MRV2-16-K-0-20	Flow restrictor, adjustable, semi-rotary spool	76 L/min (20 USgpm)
K2 - Knob	MRV2-16-K-0-30	Flow restrictor, adjustable, semi-rotary spool	114 L/min (30 USgpm)
S1 - Screw	FCV6-16-S-0-NV	Flow restrictor, adjustable, needle type	114 L/min (30 USgpm)
H1 - Hand Knob	FCV6-16-K-0-NV	Flow restrictor, adjustable, needle type	114 L/min (30 USgpm)
-	CV1-16-P-0-5	Check valve	151 L/min (40 USgpm)
-	PCS3-16-0-80	Pressure compensator, spool type	114 L/min (30 USgpm)

Dimensions


mm (inch)

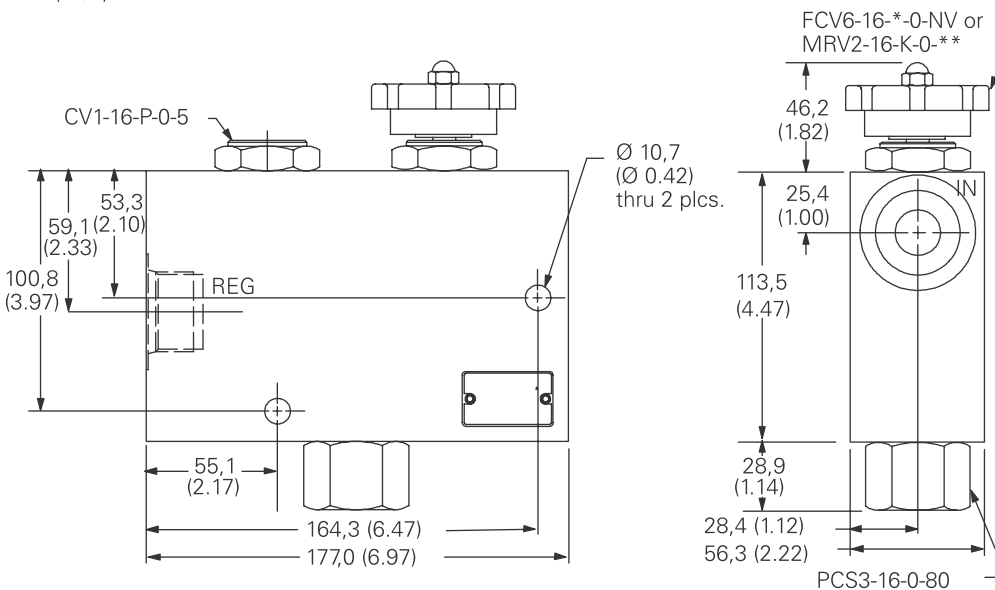

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-4 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 190 L/min (50 USgpm) • 210 bar (3000 psi)

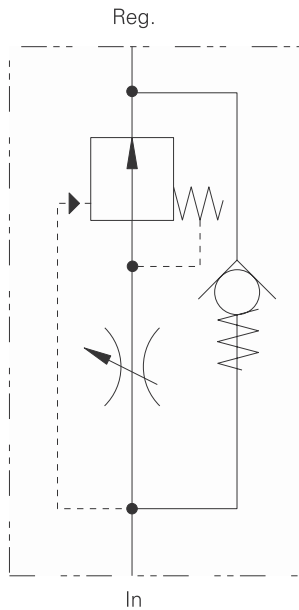

Operation

This standard valve package is used in a hydraulic circuit where flow rates must be constantly maintained, regardless of changes in upstream or downstream pressure.

Also where a full range of flow adjustments is required. It also provides free reverse flow.

Features

Pressure compensation, full flow range adjustment, aluminum in-line type housing, Screw and knob adjustment options. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regulated flow	Up to 190 L/min (50 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Full range adjustable restrictive pressure compensated flow control package with free reverse flow.

Performance characteristics

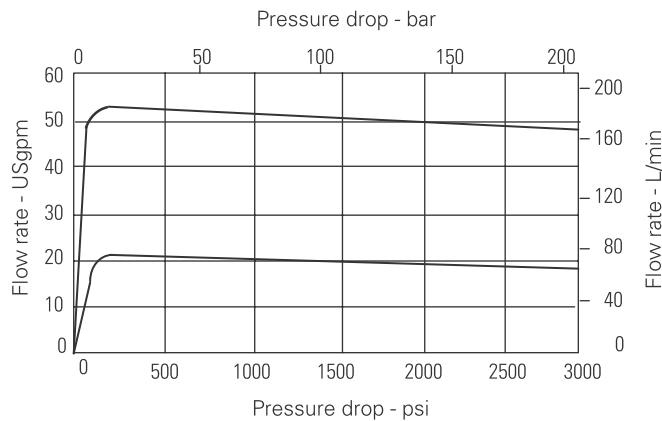


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

FRC-4 - Flow control

Pressure compensated, restrictive type, full range adjustable with reverse flow check
Up to 190 L/min (50 USgpm) • 210 bar (3000 psi)

Model code

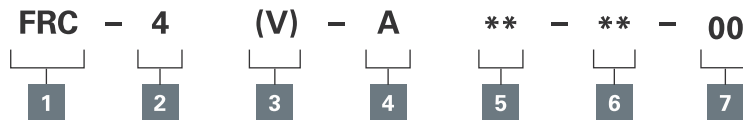


<p>1 Function FRC- Fully adjustable pressure compensated flow control with reverse flow check</p>	<p>4 Valve housing material A - Aluminum</p>	<p>7 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>													
<p>2 Maximum rated flow 4 - 190 L/min (50 USgpm)</p>	<p>5 Port size</p> <table style="width: 100%; border-collapse: collapse; border-top: 1px solid black; border-bottom: 1px solid black;"> <thead> <tr> <th style="text-align: left; border-bottom: 1px solid black;">Code</th> <th style="text-align: left; border-bottom: 1px solid black;">Port size</th> <th style="text-align: left; border-bottom: 1px solid black;">Housing number</th> </tr> </thead> <tbody> <tr> <td>12G</td> <td>1 1/4" BSPP</td> <td>02-178293</td> </tr> <tr> <td>20T</td> <td>SAE 20</td> <td>02-178294</td> </tr> </tbody> </table>	Code	Port size	Housing number	12G	1 1/4" BSPP	02-178293	20T	SAE 20	02-178294	<p>6 Adjustment type</p> <table style="width: 100%; border-collapse: collapse; border-top: 1px solid black; border-bottom: 1px solid black;"> <thead> <tr> <th style="text-align: left; border-bottom: 1px solid black;">Adjustment type</th> <th style="text-align: left; border-bottom: 1px solid black;">Flow rate</th> </tr> </thead> <tbody> <tr> <td>K1 - Knob* *180° rotation</td> <td>190 L/min (50 USgpm)</td> </tr> </tbody> </table>	Adjustment type	Flow rate	K1 - Knob* *180° rotation	190 L/min (50 USgpm)
Code	Port size	Housing number													
12G	1 1/4" BSPP	02-178293													
20T	SAE 20	02-178294													
Adjustment type	Flow rate														
K1 - Knob* *180° rotation	190 L/min (50 USgpm)														
<p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>															

Composition chart

Adjustment	Cartridge	Description	Maximum flow
K1 - Knob	NV1-20-K-0	Needle valve	190 L/min (50 USgpm)
-	CV2-20-P-0-5	Check valve	220 L/min (60 USgpm)
-	PCS3-20-0-80	Pressure compensator, spool type	200 L/min (53 USgpm)

Dimensions

mm (inch)

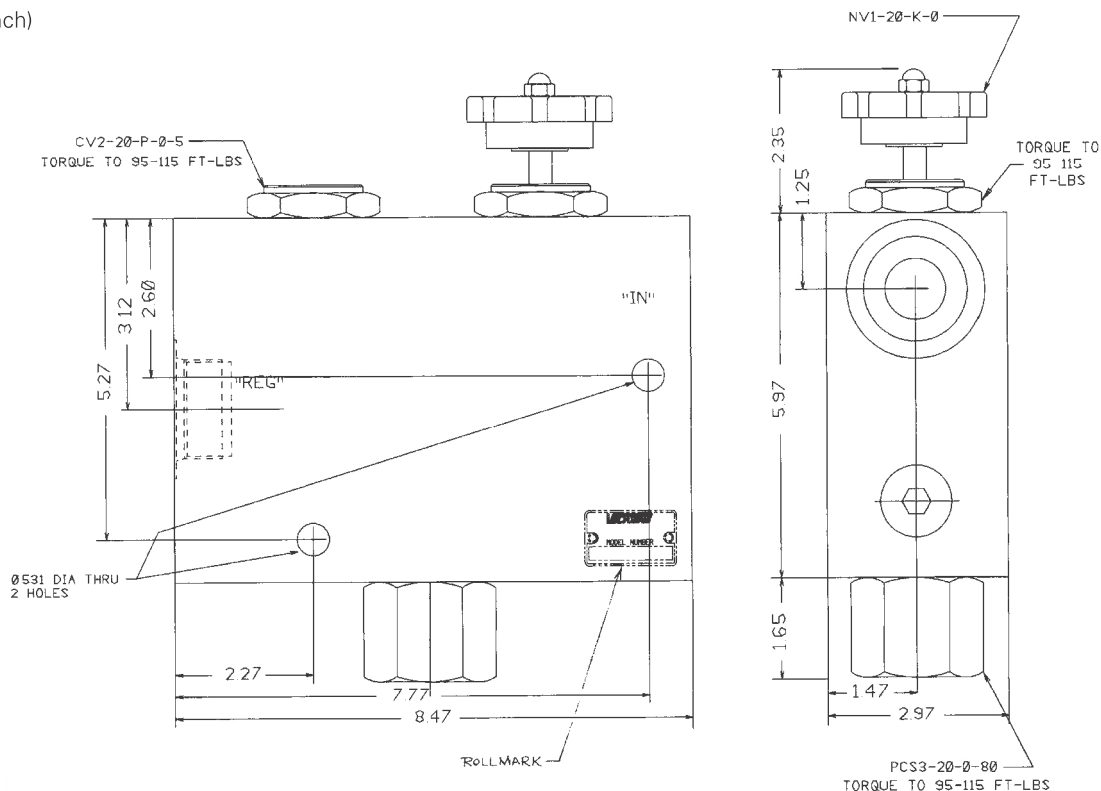


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC1-12 - Pump control

Single pump circuits

Up to 114 L/min (30 USgpm) • 5-210 bar (75-3000 psi)

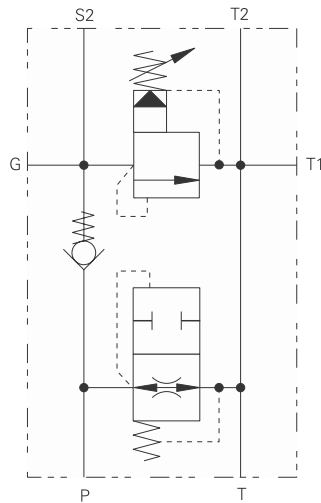

Operation

This standard valve package is used for air-bleed and start-up in single pump power units. It also provides main system relief protection.

Features

Multiple tank ports for mounting convenience, direct reservoir mounting capability by using T port. Both T port and mounting holes have O-ring seals mounting surface.

Aluminum in-line type housing, Tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure range (all ports)	5-210 bar (75-3000 psi)
Maximum regulated flow	Up to 114 L/min (30 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Pump control manifold for single pump circuits.

Pressure drop

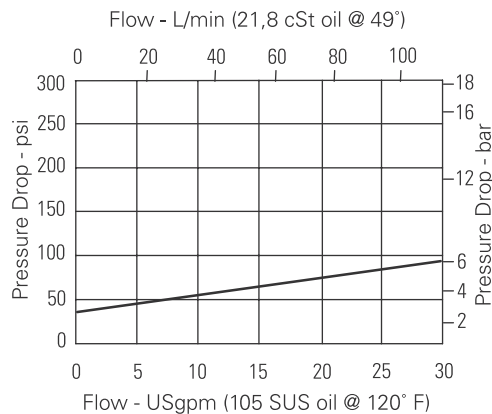

Pressure override

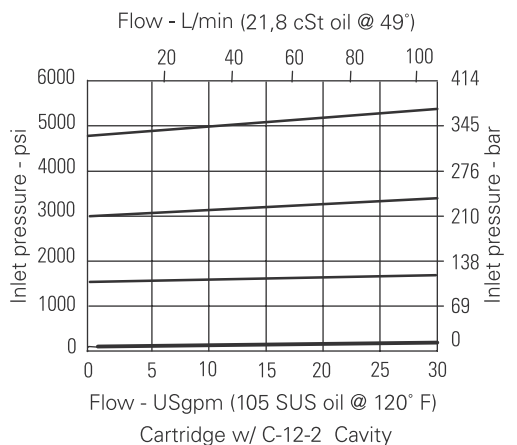


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC1-12 - Pump control

Single pump circuits
Up to 114 L/min (30 USgpm) • 5-210 bar (75-3000 psi)

Model code




<p>1 Function PCC1 - Pump control for single pump circuits</p>	<p>4 Relief control C - Cap K - Knob S - Screw</p>	<p>7 Pressure range Note: Code based on pressure in psi. 15 - 5-100 bar (75-1500 psi) 30 - 10-210 bar (150-3000 psi)</p>	<p>8 Pressure setting - user requested in 50 psi steps. Example: 10 - 1000 psi 10.5 - 1050 psi</p>										
<p>2 Size 12 - 12 size</p>	<p>5 Valve housing material A - Aluminum</p>												
<p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>	<p>6 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>P, SYS, T2</th> <th>T1</th> <th>Gauge</th> </tr> </thead> <tbody> <tr> <td>6G</td> <td>3/4" BSPP</td> <td>1/2" BSPP</td> <td>1/4" BSPP</td> </tr> <tr> <td>12T</td> <td>SAE 12</td> <td>SAE 8</td> <td>SAE 4</td> </tr> </tbody> </table>			Code	P, SYS, T2	T1	Gauge	6G	3/4" BSPP	1/2" BSPP	1/4" BSPP	12T	SAE 12
Code	P, SYS, T2	T1	Gauge										
6G	3/4" BSPP	1/2" BSPP	1/4" BSPP										
12T	SAE 12	SAE 8	SAE 4										
<p>9 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>													

Composition chart

Cartridge	Description	Maximum flow	Quantity
VF1-10-F-0-25	Velocity fuse	23 L/min (6 USgpm)	1
CV11-12-P-0-20	Check valve	113 L/min (30 USgpm)	1
RV11-12-*-0-**	Relief valve	113 L/min (30 USgpm)	1

Dimensions

mm (inch)

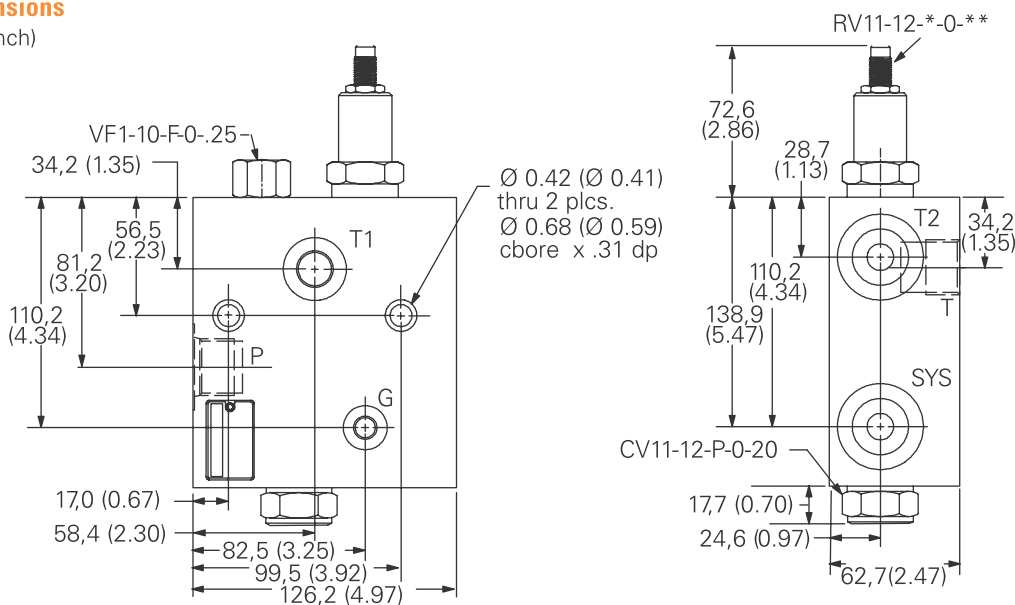


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC1-16 - Pump control

Single pump circuits

Up to 228 L/min (60 USgpm) • 10-210 bar (150-3000 psi)

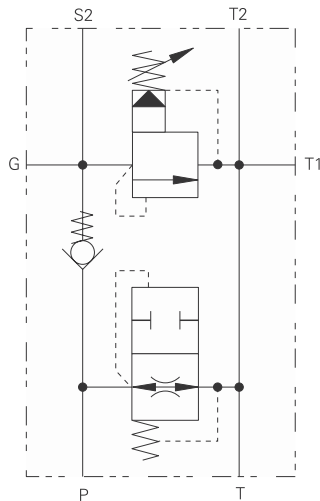

Operation

This standard valve package is used for air-bleed and start-up in single pump power units. It also provides main system relief protection.

Features

Multiple tank ports for mounting convenience, direct reservoir mounting capability by using T port. Both T port and mounting holes have O-ring seals mounting surface.

Aluminum in-line type housing, Tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure range (all ports)	10-210 bar (150-3000 psi)
Maximum regulated flow	Up to 228 L/min (60 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Pump control manifold for single pump circuits.

Pressure drop

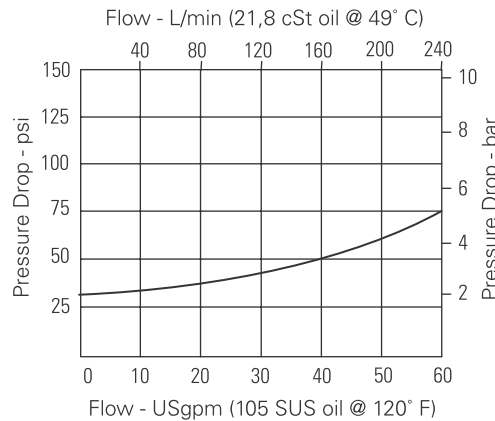

Pressure override

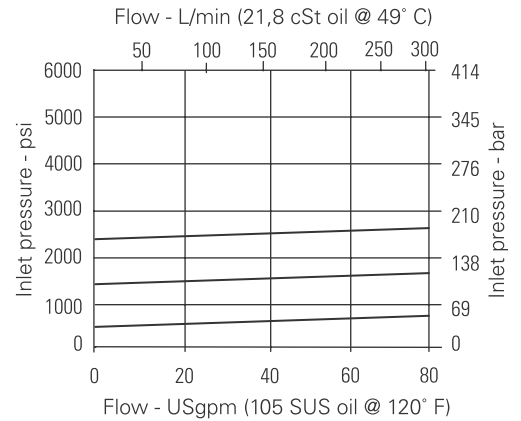


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC1-16 - Pump control

Single pump circuits
Up to 228 L/min (60 USgpm) • 10-210 bar (150-3000 psi)

Model code

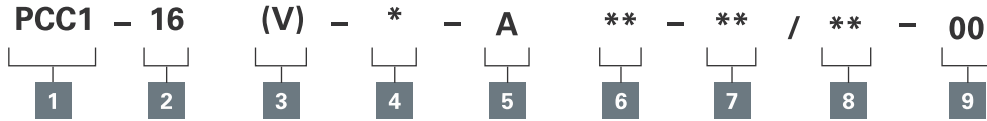


<p>1 Function PCC1 - Pump control for single pump circuits</p>	<p>4 Relief control C - Cap K - Knob S - Screw</p>	<p>7 Pressure range Note: Code based on pressure in psi. 30 - 10-210 bar (150-3000 psi)</p>	<p>9 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p>												
<p>2 Size 16 - 16 size</p>	<p>5 Valve housing material A - Aluminum</p>	<p>8 Pressure setting - user requested in 50 psi steps. Example: 10 - 1000 psi 10.5 - 1050 psi</p>													
<p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p>	<p>6 Port size</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Code</th> <th>P, SYS, T2</th> <th>T1</th> <th>Gauge</th> </tr> </thead> <tbody> <tr> <td>8G</td> <td>1" BSPP</td> <td>3/4" BSPP</td> <td>1/4" BSPP</td> </tr> <tr> <td>16T</td> <td>SAE 16</td> <td>SAE 8</td> <td>SAE 4</td> </tr> </tbody> </table>			Code	P, SYS, T2	T1	Gauge	8G	1" BSPP	3/4" BSPP	1/4" BSPP	16T	SAE 16	SAE 8	SAE 4
Code	P, SYS, T2	T1	Gauge												
8G	1" BSPP	3/4" BSPP	1/4" BSPP												
16T	SAE 16	SAE 8	SAE 4												

Composition chart

Cartridge	Description	Maximum flow	Quantity
VF1-10-F-0-25	Velocity fuse	23 L/min (6 USgpm)	1
CV2-20-P-0-30	Check valve	228 L/min (60 USgpm)	1
RV5-16-*-0-30	Relief valve	303 L/min (80 USgpm)	1

Dimensions

mm (inch)

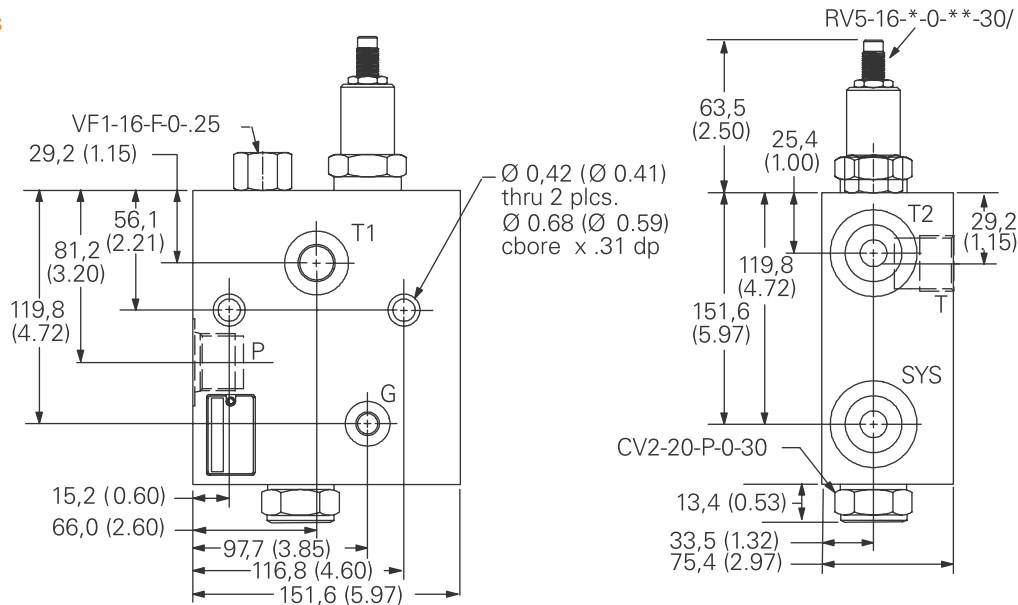


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC2-12 - Pump control

Multiple pump circuits

Up to 114 L/min (30 USgpm) • 5-210 bar (75-3000 psi)

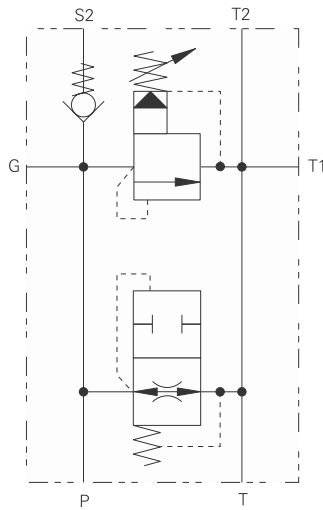

Operation

This standard valve package is used to provide air-bleed, start-up and relief protection for each pump in multiple pump circuits. The check valve position in the circuit isolates the other pumps from the valve assembly.

Features

Individual relief pressure setting for each pump in the system, multiple tank ports for mounting convenience, direct reservoir mounting capability by using T port. Both T port and mounting holes have O-ring seals mounting surface.

Aluminum in-line type housing, tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure range (all ports)	5 - 210 bar (75 - 3000 psi)
Maximum regulated flow	Up to 114 L/min (30 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Pump control manifold for multiple pump circuits.

Pressure drop

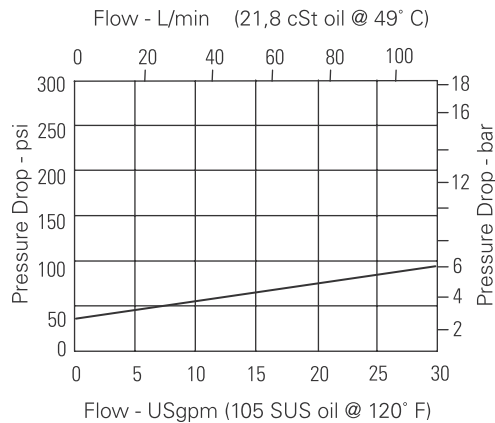

Pressure override

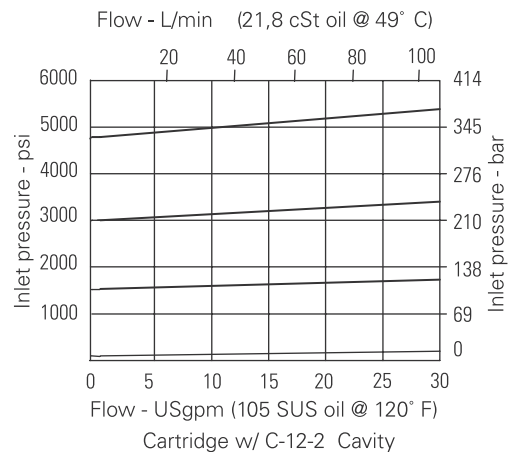


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC2-12 - Pump control

Multiple pump circuits
Up to 114 L/min (30 USgpm) • 5-210 bar (75-3000 psi)

Model code



- 1 Function**
PCC2 - Pump control for single pump circuits
- 2 Size**
12 - 12 size
- 3 Seal material**
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont
- 4 Relief control**
C - Cap
K - Knob
S - Screw
- 5 Valve housing material**
A - Aluminum
- 6 Port size**
- 7 Pressure range**
Note: Code based on pressure in psi.
15 - 5-100 bar (75-1500 psi)
30 - 10-210 bar (150-3000 psi)
- 8 Pressure setting -**
user requested in 50 psi steps.
Example:
10 - 1000 psi
10.5 - 1050 psi
- 9 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)


Code	P, SYS, T2	T1	Gauge
6G	3/4" BSPP	1/2" BSPP	1/4" BSPP
12T	SAE 12	SAE 8	SAE 4

Composition chart

Cartridge	Description	Maximum flow	Quantity
VF1-10-F-0-.25	Velocity fuse	23 L/min (6 USgpm)	1
CV11-12-P-0-20	Check valve	113 L/min (30 USgpm)	1
RV11-12-*-.0-**/	Relief valve	113 L/min (30 USgpm)	1

Dimensions

mm (inch)

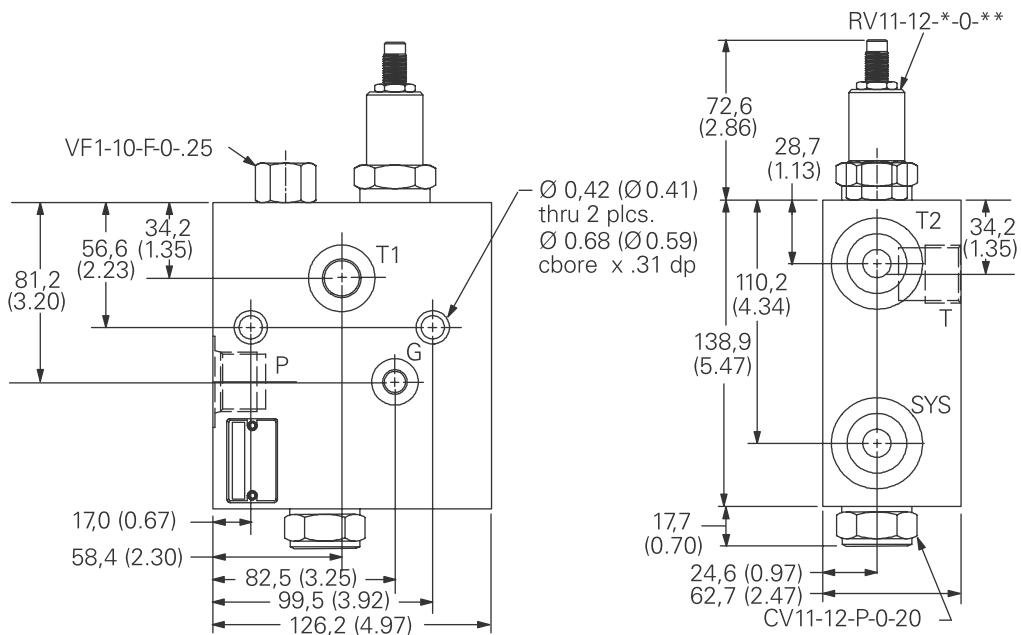


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC2-16 - Pump control

Multiple pump circuits

Up to 228 L/min (60 USgpm) • 10-210 bar (150-3000 psi)

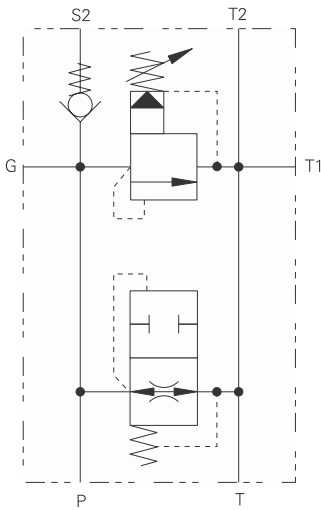

Operation

This standard valve package is used to provide air-bleed, start-up and relief protection for each pump in multiple pump circuits. The check valve position in the circuit isolates the other pumps from the valve assembly.

Features

Individual relief pressure setting for each pump in the system, multiple tank ports for mounting convenience, direct reservoir mounting capability by using T port. Both T port and mounting holes have O-ring seals mounting surface.

Aluminum in-line type housing, tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure range (all ports)	10-210 bar (150-3000 psi)
Maximum regulated flow	Up to 228 L/min (60 USgpm)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Pump control manifold for multiple pump circuits.

Pressure drop

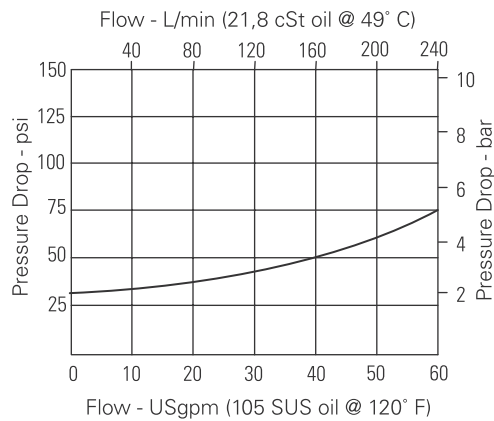

Pressure override

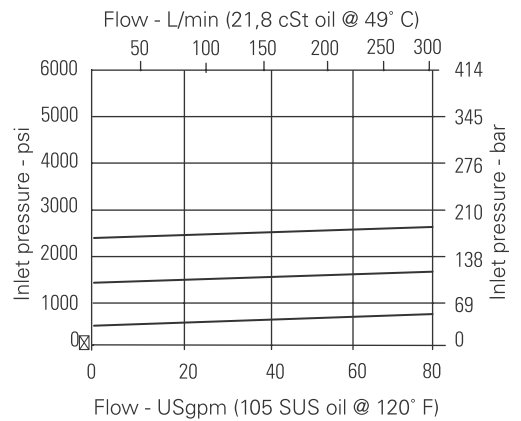


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PCC2-16 - Pump control

Multiple pump circuits
Up to 228 L/min (60 USgpm) • 10-210 bar (150-3000 psi)

Model code




1 Function PCC2 - Pump control for single pump circuits	4 Relief control C - Cap K - Knob S - Screw	7 Pressure range Note: Code based on pressure in psi. 30 - 10-210 bar (150-3000 psi)	9 Special features 00 - None (Only required if valve has special features, omitted if "00".)												
2 Size 16 - 16 size	5 Valve housing material A - Aluminum	8 Pressure setting - user requested in 50 psi steps. Example: 10 - 1000 psi 10.5 - 1050 psi													
3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont	6 Port size <table border="1"> <thead> <tr> <th>Code</th> <th>P, SYS, T2</th> <th>T1</th> <th>Gauge</th> </tr> </thead> <tbody> <tr> <td>8G</td> <td>1" BSPP</td> <td>3/4" BSPP</td> <td>1/4" BSPP</td> </tr> <tr> <td>16T</td> <td>SAE 16</td> <td>SAE 12</td> <td>SAE 4</td> </tr> </tbody> </table>	Code	P, SYS, T2	T1	Gauge	8G	1" BSPP	3/4" BSPP	1/4" BSPP	16T	SAE 16	SAE 12	SAE 4		
Code	P, SYS, T2	T1	Gauge												
8G	1" BSPP	3/4" BSPP	1/4" BSPP												
16T	SAE 16	SAE 12	SAE 4												

Composition chart

Cartridge	Description	Maximum flow	Quantity
VF1-10-F-0-.25	Velocity fuse	23 L/min (6 USgpm)	1
CV2-20-P-0-30	Check valve	228 L/min (60 USgpm)	1
RV5-16-*-.0-30/	Relief valve	303 L/min (80 USgpm)	1

Dimensions


mm (inch)

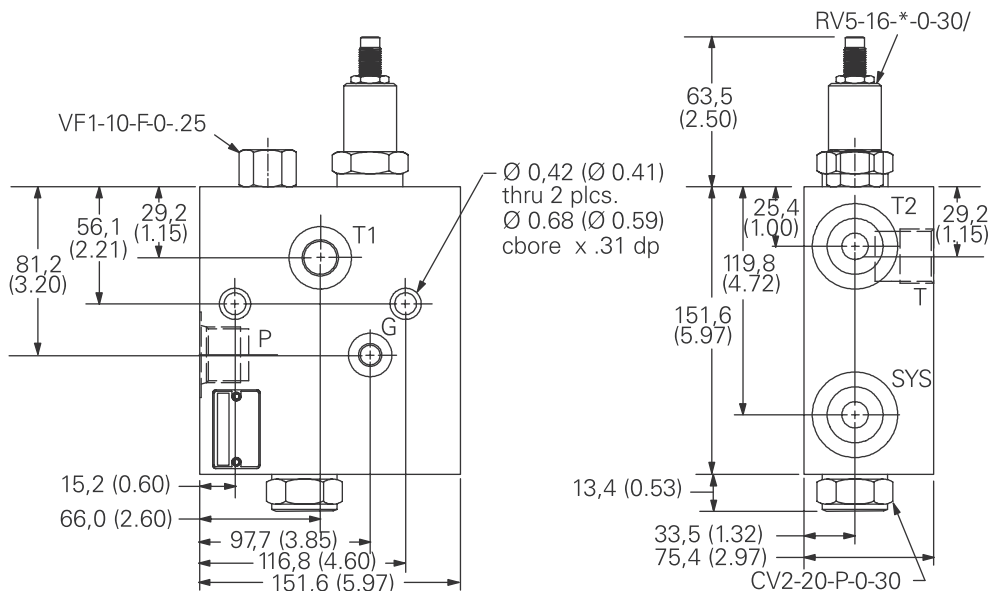

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-8 - Flow control

Pressure compensated, priority type, with relief on priority flow
 15 L/min (4 USgpm) • 7-210 bar (100-3000 psi)

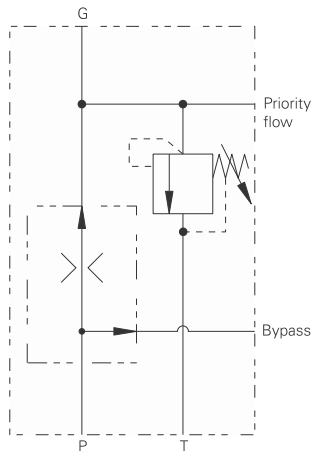

Operation

This standard valve package is used to maintain constant flow to priority circuits when input flow is greater than required, regardless of changes in upstream or downstream pressure. It will bypass the rest of the flow to an auxiliary circuit or to tank.

Relief valve on a priority port limits pressure on a priority port, as well as ensures bypass flow when there is no demand on priority circuit.

Features

Priority flow pressure compensation, all ports except T can be pressurized to 210 bar (3000 psi). Aluminum in-line type housing, tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure range	7-210 bar (100-3000 psi)
Maximum inlet flow	15 L/min (4 USgpm)
Regulated flow range	0.4-8 L/min (0.1-2.5 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min) max @ 210 bar (3000 psi)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Fixed priority flow control with relief on priority flow port.

Typical flow regulation

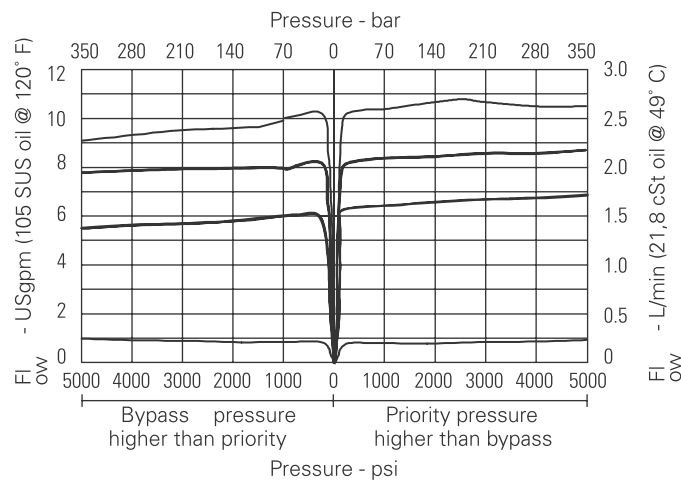


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-8 - Flow control

Pressure compensated, priority type, with relief on priority flow
15 L/min (4 USgpm) • 7-210 bar (100-3000 psi)

Model code

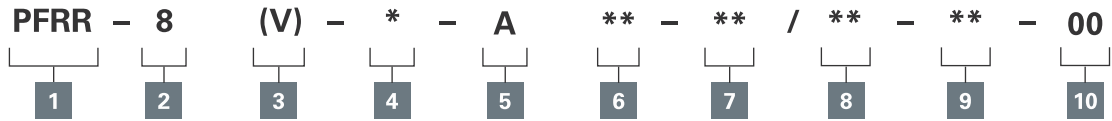

1 Function

PFRR - Pressure compensated priority flow control with relief on priority port

2 Size

8 - 8 size

3 Seal material

Blank - Buna-N

V - Viton®

Viton is a registered trademark of E.I. DuPont

4 Relief control

C - Cap

K - Knob

S - Screw

5 Valve housing material

A - Aluminum

7 Pressure range

Note: Code based on pressure in psi.

3 - 3-20 bar (50-300 psi)

20 - 40-140 bar (600-2000 psi)

36 - 20-250 bar (300-3600 psi)

8 Pressure setting -

user requested in 50 psi steps.

Example:

10 - 1000 psi

10.5 - 1050 psi

9 Flow setting

Customer must specify flow: 0.4 - 8L/min (0.1 - 2.5 USgpm)

10 Special features

00 - None

(Only required if valve has special features, omitted if "00".)

6 Port size


Code	P, Bypass	Priority, T	Gauge	Housing number
3G	3/8" BSPP	3/8" BSPP	1/4" BSPP	02-178273
8T	SAE 8	SAE 8	SAE 4	02-178274

Composition chart

Cartridge	Description	Quantity
PFR5-8-F-0-**-**	Priority flow regulator	1
RV1-8-*0-**-**	Relief valve	1

Dimensions


mm (inch)

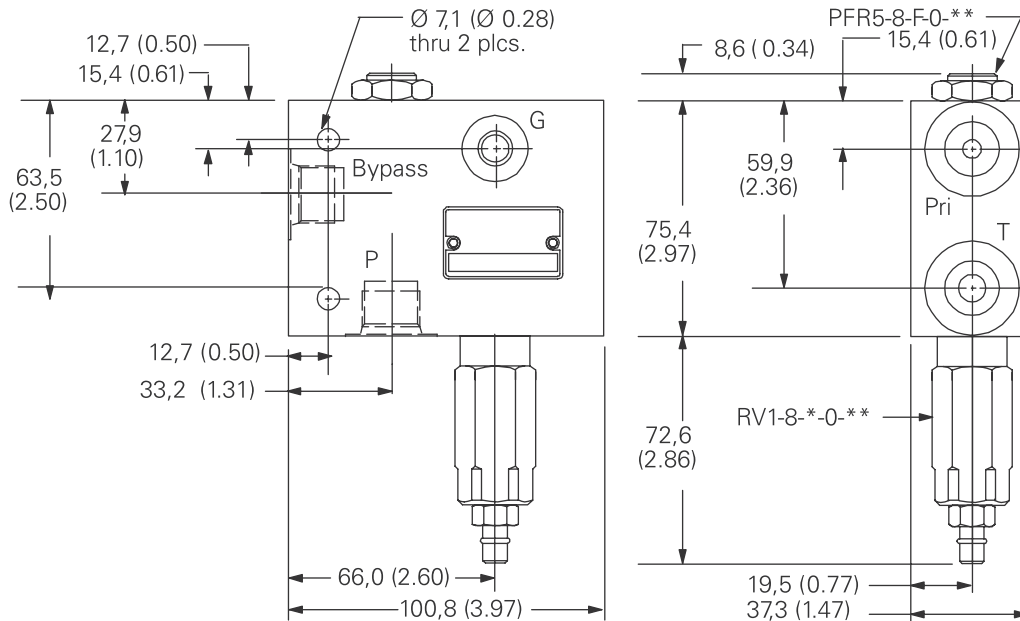

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-10 - Flow control

Pressure compensated, priority type, with relief on priority flow
Up to 57 L/min (15 USgpm) • 7-210 bar (100-3000 psi)

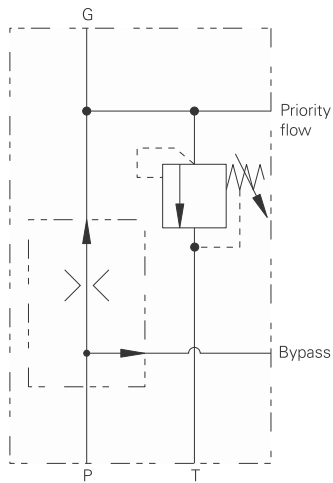

Operation

This standard valve package is used to maintain constant flow to priority circuits when input flow is greater than required, regardless of changes in upstream or downstream pressure. It will bypass the rest of the flow to an auxiliary circuit or to tank.

Relief valve on a priority port limits pressure on a priority port, as well as ensures bypass flow when there is no demand on priority circuit.

Features

Priority flow pressure compensation, all ports except T can be pressurized to 210 bar (3000 psi). Aluminum in-line type housing, tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)


Typical application pressure range	7-210 bar (100-3000 psi)
Maximum inlet flow	57 L/min (15 USgpm)
Regulated flow range	0.38-22.7 L/min (0.1-6 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min) max @ 210 bar (3000 psi)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Fixed priority flow control with relief on priority flow port.

Typical flow regulation

- A** - Port 3, priority (regulated) outlet pressurized
- B** - Port 2, bypass outlet pressurized

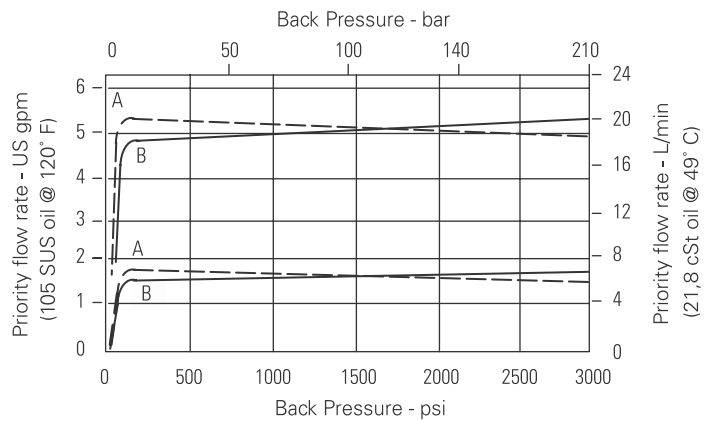

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-10 - Flow control

Pressure compensated, priority type, with relief on priority flow
Up to 57 L/min (15 USgpm) • 7-210 bar (100-3000 psi)

Model code PFRR - 10 (V) - * - A ** - ** / ** - ** - 00

1
2
3
4
5
6
7
8
9
10

- | | | | |
|--|---|---|---|
| <p>1 Function
PFRR - Pressure compensated priority flow control with relief on priority port</p> <hr/> <p>2 Size
10 - 10 size</p> <hr/> <p>3 Seal material
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont</p> | <p>4 Relief control
C - Cap
K - Knob
S - Screw</p> <hr/> <p>5 Valve housing material
A - Aluminum</p> | <p>7 Pressure range
Note: Code based on pressure in psi.
3 - 3-20 bar (50-300 psi)
20 - 7-140 bar (100-2000 psi)
35 - 17-240 bar (250-3500 psi)</p> <hr/> <p>8 Pressure setting -
user requested in 50 psi steps.
Example:
10 - 1000 psi
10.5 - 1050 psi</p> | <p>9 Flow setting
Customer must specify flow: 0.38 - 22.7L/min (0.1 - 6 USgpm)</p> <hr/> <p>10 Special features
00 - None
(Only required if valve has special features, omitted if "00".)</p> |
|--|---|---|---|

6 Port size


Code	P, Bypass	Priority, T	Gauge	Housing number
4G	3/8" BSPP	1/2" BSPP	1/4" BSPP	02-178275
10T	SAE 8	SAE 8	SAE 4	02-178276

Composition chart

Cartridge	Description	Quantity
PFRR10-F-0-**	Priority flow regulator	1
RV5-10-* -0-35/	Relief valve	1

Dimensions


mm (inch)

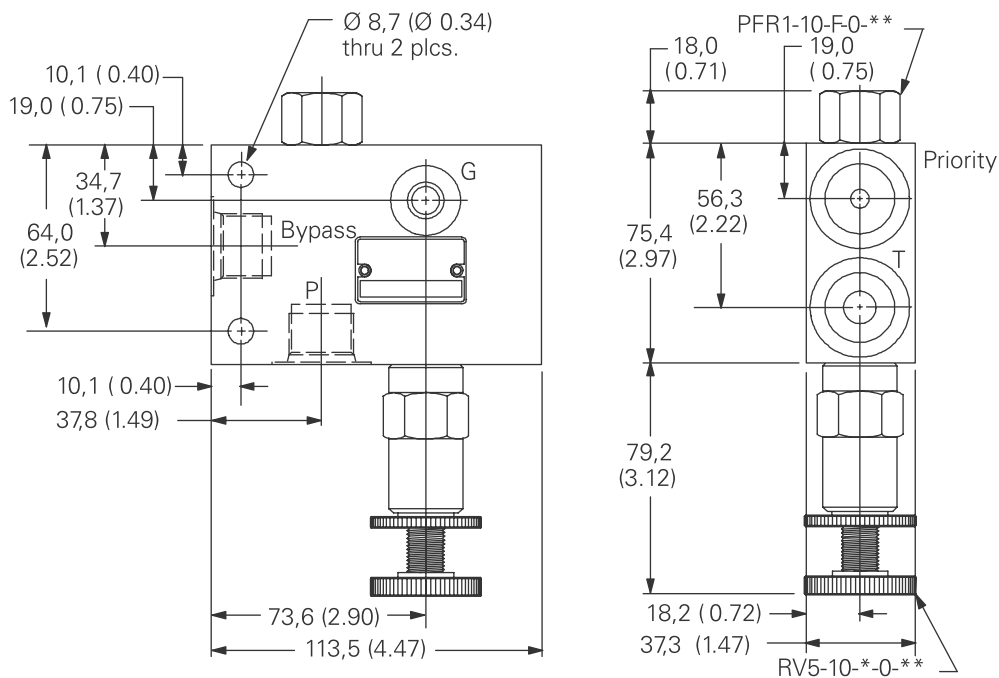

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-16 - Flow control

Pressure compensated, priority type, with relief on priority flow
152 L/min (40 USgpm) • 7-210 bar (100-3000 psi)

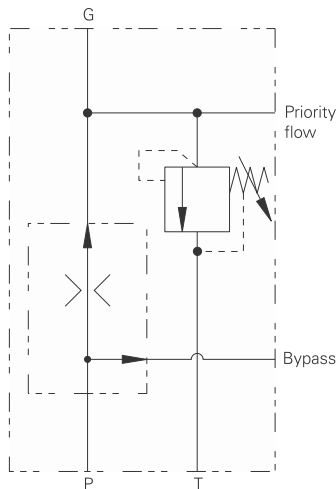

Operation

This standard valve package is used to maintain constant flow to priority circuits when input flow is greater than required, regardless of changes in upstream or downstream pressure. It will bypass the rest of the flow to an auxiliary circuit or to tank.

Relief valve on a priority port limits pressure on a priority port, as well as ensures bypass flow when there is no demand on priority circuit.

Features

Priority flow pressure compensation, all ports except T can be pressurized to 210 bar (3000 psi). Aluminum in-line type housing, tamper proof and adjustable relief options, gauge port. All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)


Typical application pressure range	7-210 bar (100-3000 psi)
Maximum inlet flow	152 L/min (40 USgpm)
Regulated flow range	1.9-113 L/min (0.5-30 USgpm)
Internal leakage	82 cm ³ /min (5 in ³ /min) max @ 210 bar (3000 psi)
Temperature range	-40° to 120°C (-40° to 248°F)
Reseat pressure	90% of crack pressure
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Fixed priority flow control with relief on priority flow port.

Typical flow regulation

- A** - Port 3, priority outlet pressurized
- B** - Port 2, bypass outlet pressurized

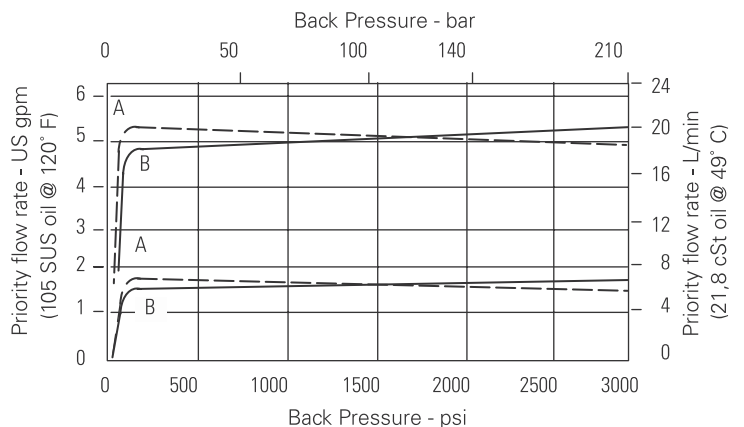


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

PFRR-16 - Flow control

Pressure compensated, priority type, with relief on priority flow
152 L/min (40 USgpm) • 7-210 bar (100-3000 psi)

Model code



- 1 Function**
PFRR - Pressure compensated priority flow control with relief on priority port
- 2 Size**
16 - 16 size
- 3 Seal material**
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont
- 4 Relief control**
C - Cap
K - Knob
S - Screw
- 5 Valve housing material**
A - Aluminum
- 6 Port size**
- 7 Pressure range**
Note: Code based on pressure in psi.
3 - 3-20 bar (50-300 psi)
20 - 7-140 bar (100-2000 psi)
35 - 17-240 bar (250-3500 psi)
- 8 Pressure setting -**
user requested in 50 psi steps.
Example:
10 - 1000 psi
10.5 - 1050 psi
- 9 Flow setting**
Customer must specify flow: 0.38 - 22.7L/min (0.1 - 6 USgpm)
- 10 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)


Code	P, Bypass	Priority, T	Gauge	Housing number
8G	1" BSPP	3/4" BSPP	1/4" BSPP	02-178277
16T	SAE 16	SAE 12	SAE 4	02-178278

Composition chart

Cartridge	Description	Quantity
PFRR-16-F-0-**-**	Priority flow regulator	1
RV5-10-*-0-**-**/**	Relief valve	1

Dimensions

mm (inch)

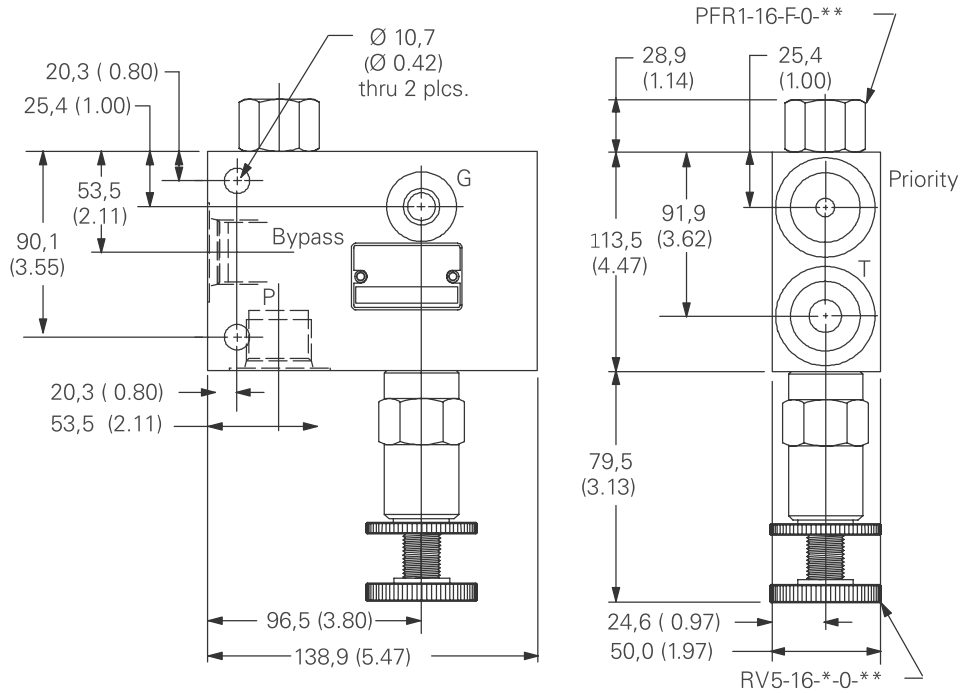


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-8 - Unloading/relief valve


Normally open or normally closed

23 L/min (6 USgpm) • 210 bar (3000 psi)

Normally Closed Version

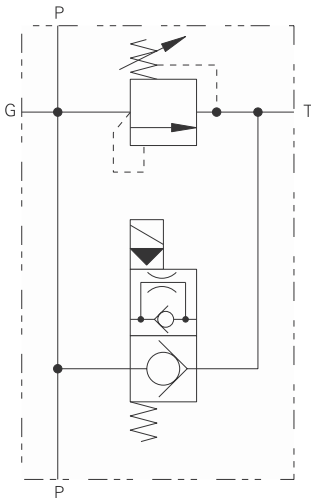

Normally Open Version

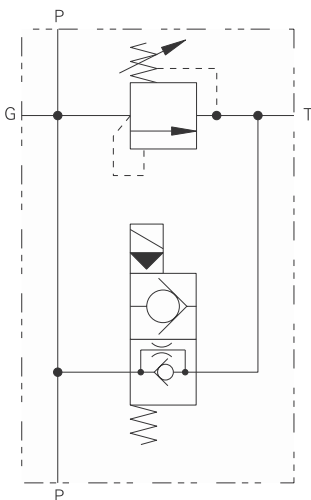

Operation

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches relief valve setting.

Features

Normally closed and normally open options, tamper proof or adjustable relief options. Low power requirements, gauge port. Aluminum in-line type housing, number of voltage and connector options.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Flow rating	23 L/min (6 USgpm)
Internal leakage	5 drops/min @ 80% of crack pressure
Reseat pressure	80% of crack pressure
Typical vented ΔP	4 bar (60 psi) at rated flow
Coil specifications	Power requirements: 16 watts Coil duty: Continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Solenoid actuated relief valve.

Pressure drop (unloading)

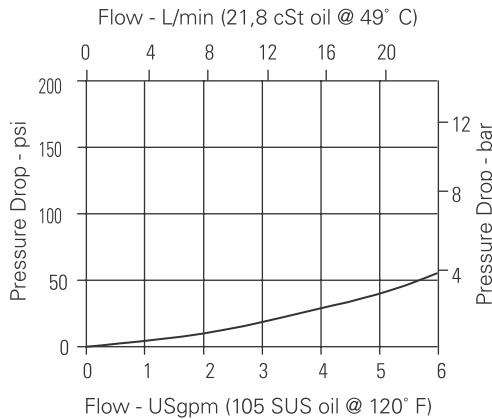

Pressure override

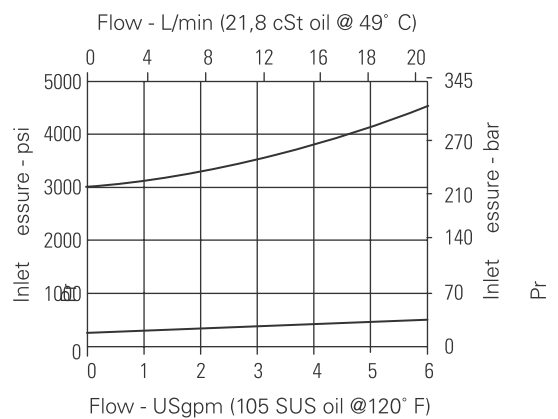


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-8 - Unloading/relief valve

Normally open or normally closed
23 L/min (6 USgpm) • 210 bar (3000 psi)

Model code

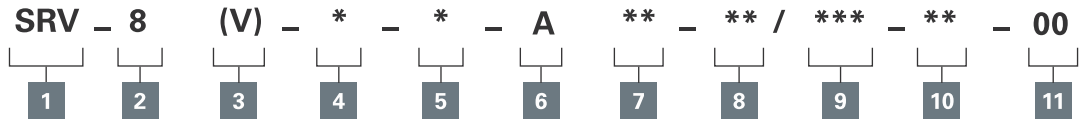


1 Function SRV - Solenoid actuated relief valve	5 Relief control P - leakproof screw adjustment R - Handknob adjustment G - Tamperproof cap (See page E-7 for dimensions)	8 Relief Pressure range Note: Code based on pressure in psi. 10 - 7-100 bar (100-1450 psi) 20 - 35 - 210 bar (500-3000 psi)	10 Connector types GS - ISO 4400 DIN 43650 connector PS - 1/2" NPT conduit WS - Lead wire												
2 Size 8 - 8 size	6 Valve housing material A - Aluminum	9 Voltage rating 12D - 12 VDC 24D - 24 VDC 120A - 120 VAC 240A - 240 VAC	11 Special features 00 - None (Only required if valve has special features, omitted if "00".)												
3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont	7 Port size <table border="1"> <thead> <tr> <th>Code</th> <th>P, T</th> <th>Gauge</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>3G</td> <td>3/8" BSPP</td> <td>1/4" BSPP</td> <td>02-178306</td> </tr> <tr> <td>8T</td> <td>SAE 8</td> <td>SAE 4</td> <td>02-178307</td> </tr> </tbody> </table>	Code	P, T	Gauge	Housing number	3G	3/8" BSPP	1/4" BSPP	02-178306	8T	SAE 8	SAE 4	02-178307		
Code	P, T	Gauge	Housing number												
3G	3/8" BSPP	1/4" BSPP	02-178306												
8T	SAE 8	SAE 4	02-178307												
4 Type C - Normally closed O - Normally open															

Composition chart

Cartridge	Description	Quantity
SV5-8-0-0-**-**	2 way/2 position N.O. poppet solenoid valve	1
SV5-8-C-0-**-**	2 way/2 position N.C. poppet solenoid valve	1
1DR30-**-**-**	Relief valve, direct acting	1

Dimensions

mm (inch)

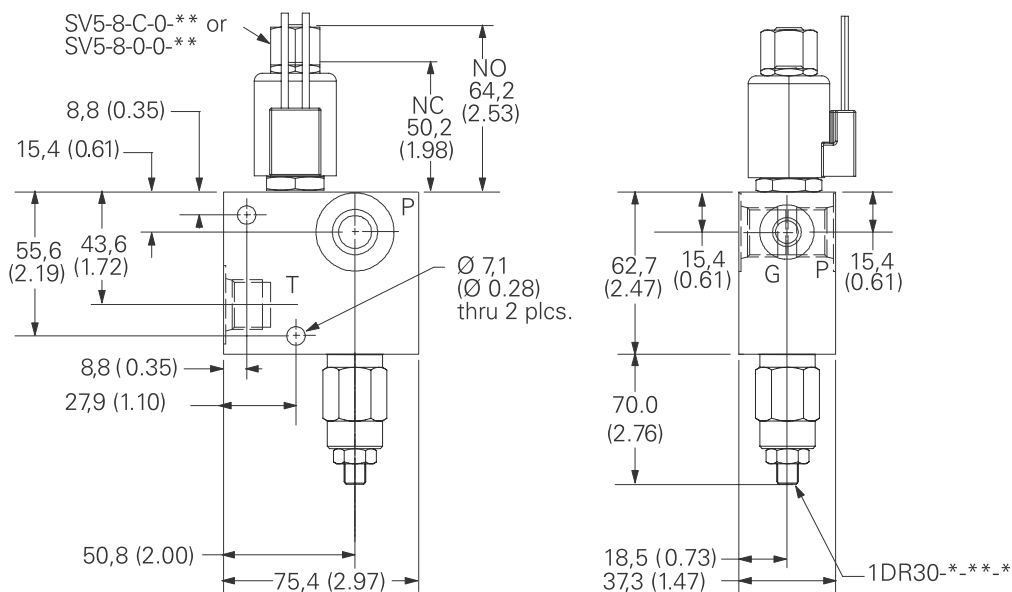


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.


SRV-10 - Unloading/relief valve

Normally open or normally closed
 57 L/min (15 USgpm) • 210 bar (3000 psi)

Normally closed version

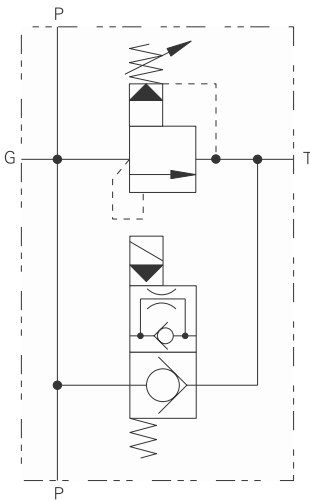

Normally open version

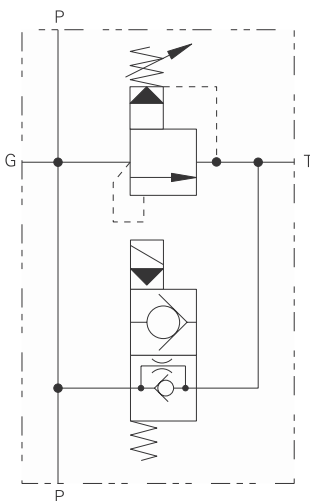

Operation

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches the relief valve setting.

Features

Normally closed and normally open options, tamper proof or adjustable relief options. Low power requirements, gauge port. Aluminum in-line type housing, number of voltage and connector options.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Flow rating	57 L/min (15 USgpm)
Internal leakage	80 cm ³ /min (5 in ³ /min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	7 bar (100 psi) at rated flow
Coil specifications	Power requirements: 18 watts Coil duty: continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Description

Solenoid actuated relief valve.

Pressure drop (unloading)

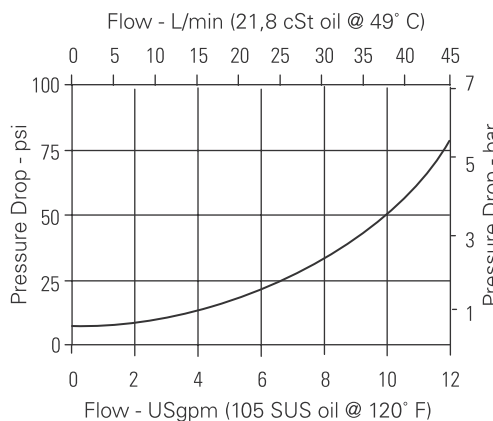

Pressure override

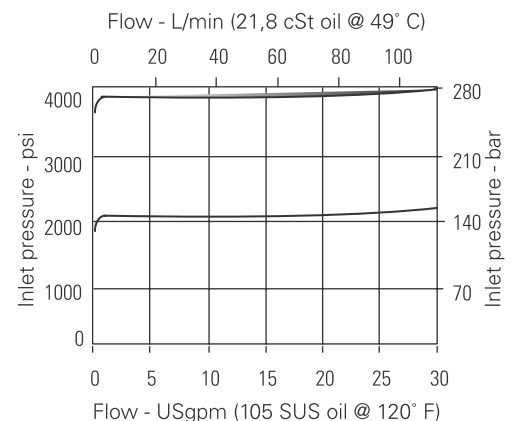


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-10 - Unloading/relief valve

Normally open or normally closed
57 L/min (15 USgpm) • 210 bar (3000 psi)

Model code

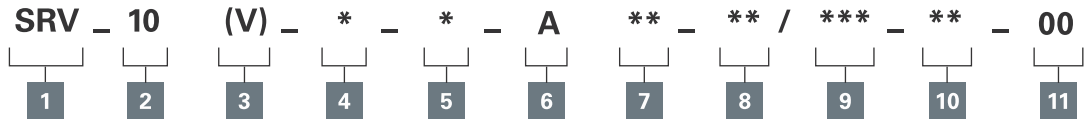


1 Function SRV - Solenoid actuated relief valve	5 Relief control C - Cap K - Knob S - Screw	8 Relief Pressure range Note: Code based on pressure in psi. 3 - 3-20 bar (50-300 psi) 35 - 17-240 bar (250-300 psi)	10 Connector types G - ISO 4400 DIN 43650 connector P - 1/2" NPT conduit W - Leadwire												
2 Size 10 - 10 size	6 Valve housing material A - Aluminum	9 Voltage rating 12D - 12 VDC 24D - 24 VDC 115A - 115 VAC 230A - 230 VAC	11 Special features 00 - None (Only required if valve has special features, omitted if "00".)												
3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont	7 Port size <table border="1"> <thead> <tr> <th>Code</th> <th>P, T</th> <th>Gauge</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>4G</td> <td>1/2" BSPP</td> <td>1/4" BSPP</td> <td>02-178308</td> </tr> <tr> <td>10T</td> <td>SAE 10</td> <td>SAE 4</td> <td>02-178309</td> </tr> </tbody> </table>	Code	P, T	Gauge	Housing number	4G	1/2" BSPP	1/4" BSPP	02-178308	10T	SAE 10	SAE 4	02-178309		
Code	P, T	Gauge	Housing number												
4G	1/2" BSPP	1/4" BSPP	02-178308												
10T	SAE 10	SAE 4	02-178309												
4 Type C - Normally closed O - Normally open															

Composition chart

Cartridge	Description	Quantity
SV5-10-0-0-**-**	2 way/2 position N.O. poppet solenoid valve	1
SV1-10-C-0-**-**	2 way/2 position N.C. poppet solenoid valve	1
RV5-10-*-0-**-**	Relief valve, pilot operated	1

Dimensions

mm (inch)

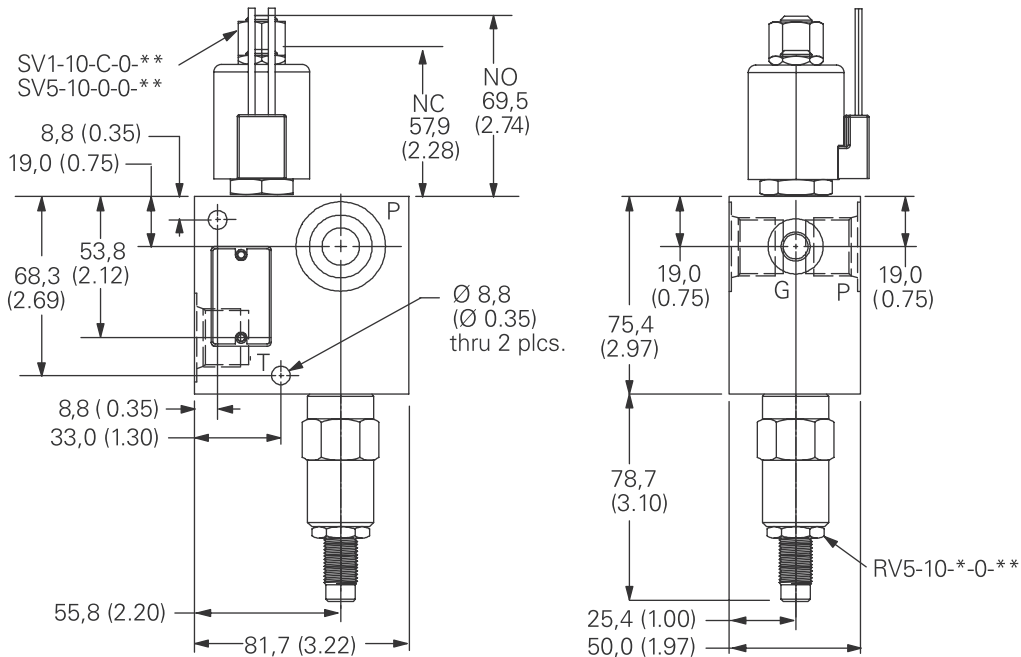


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-12 - Solenoid vented relief valve

Normally open or normally closed
 100 L/min (26 USgpm) • 210 bar (3000 psi)

Normally closed version

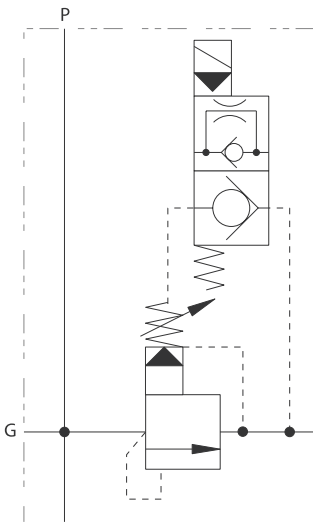

Operation

This standard valve package is designed for pump unloading via solenoid valve activation to control remotely ventable relief valve and system relief, when the solenoid valve is not activated.

Features

Normally closed and normally open options, tamper proof or adjustable relief options. Low power requirements, gauge port. Aluminum in-line type housing, number of voltage and connector options.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.


Performance data

Ratings and specifications



Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Flow rating	100 L/min (26 USgpm)
Internal leakage	35 milliliters/min @ 280 bar
Reseat pressure	Refer datasheet of 1VR100 in Section E
Typical vented ΔP	Refer datasheet of 1VR100 in Section E
Coil specifications	Power requirements: 16 watts Coil duty: Continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Normally open version

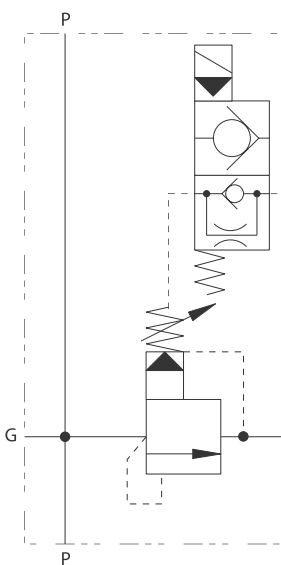

Pressure drop curves

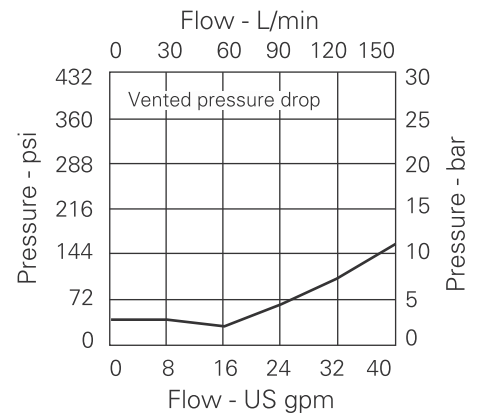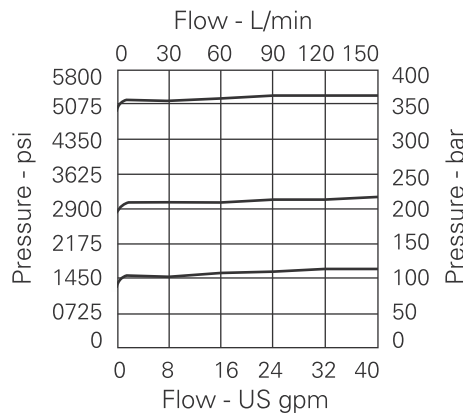

Description


Solenoid actuated vented relief valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-12 - Solenoid vented relief valve

Normally open or normally closed
100 L/min (26 USgpm) • 210 bar (3000 psi)

Model code

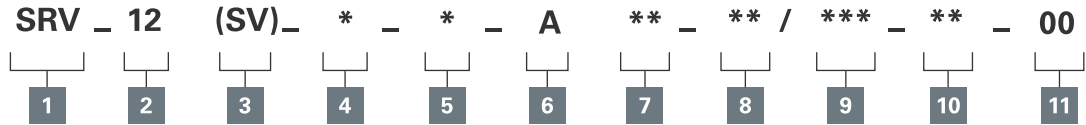

- 1 Function**
SRV - Solenoid actuated ventable relief valve

- 2 Size**
12 - 12 size

- 3 Seal material**
S - Nitrile (for use with most industrial hydraulic oils)
V - Viton® (for high temperatures and most special fluid applications)
Viton is a registered trademark of E.I. DuPont

- 4 Type**
C - Normally closed
O - Normally open

- 5 Relief control**
P - Leakproof Screw Adjustments
G - Temper Proof Cap

- 6 Valve housing material**
A - Aluminum

7 Port size

Code	P, T	Gauge	Housing number
6W	3/4" BSPP	1/4" BSPP	6030455-001
12T	SAE 12	SAE 4	6030455-002

- 8 Relief pressure range**
Note: Code based on pressure in psi.
20 - 10-210 bar (145-3000 psi)

- 9 Voltage rating**
12D - 12 VDC
24D - 24 VDC
120A - 120 VAC
240A - 240 VAC

- 10 Connector types**
GS - ISO 4400 DIN 43650 connector
PS - 1/2" NPT conduit
WS - Leadwire


- 11 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
SV5-8-0-0-**-**	2 way/2 position N.O. poppet solenoid valve	1
SV5-8-C-0-**-**	2 way/2 position N.C. poppet solenoid valve	1
1VR100***-P*-***	Vented relief valve	1

Dimensions

mm (inch)

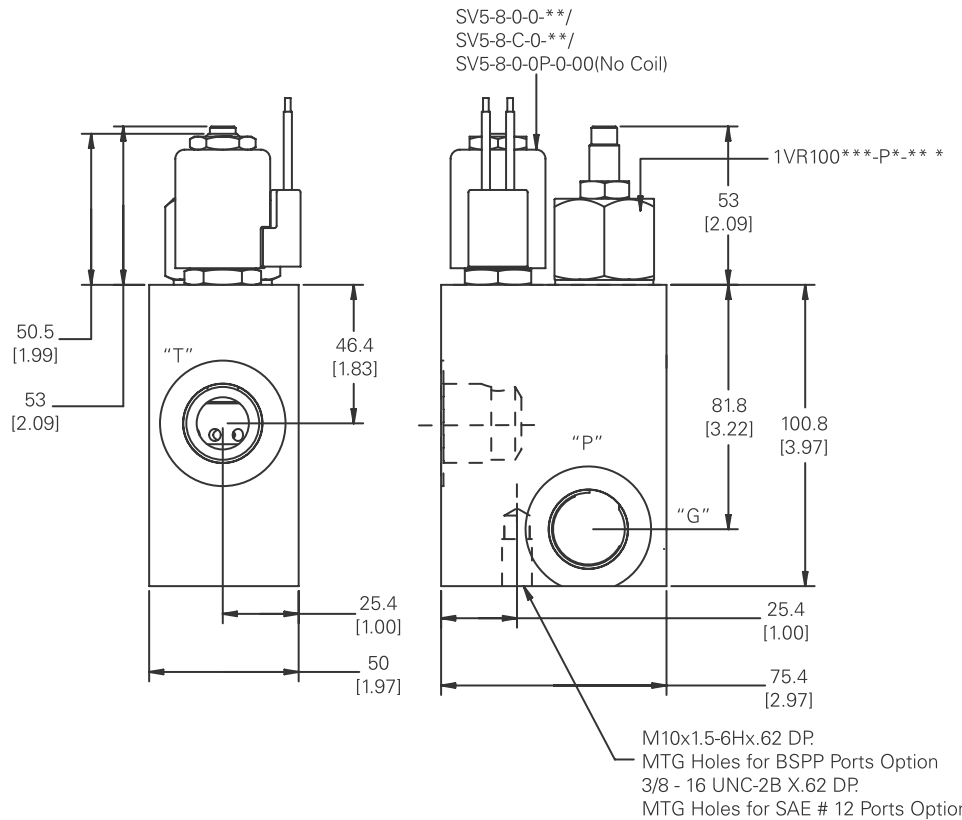


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-16 - Solenoid vented relief valve

Normally open or normally closed
 225 L/min (60 USgpm) • 210 bar (3000 psi)

Normally closed version

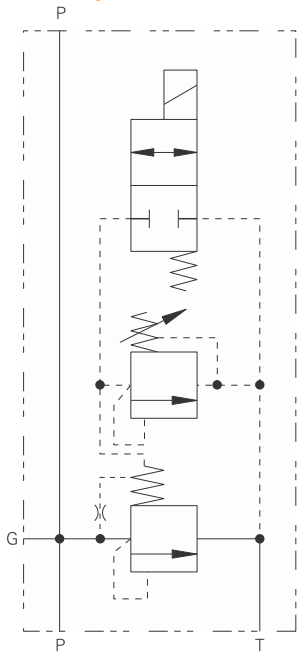

Operation

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches relief valve setting.

Features

Normally closed and normally open options, tamper proof or adjustable relief options. Low power requirements, gauge port. Aluminum in-line type housing, number of voltage and connector options.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.


Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Flow rating	225 L/min (60 USgpm)
Internal leakage	160 L/min (10 in ³ /min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	8 bar (120 psi) at rated flow
Coil specifications	16 watts
Power requirements:	Continuous from 85% to 110% of nominal voltage
Coil duty:	(AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Normally open version

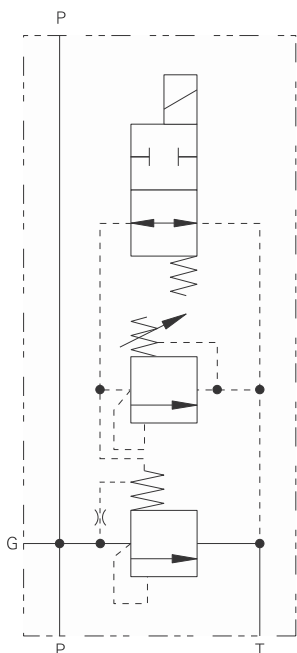

Pressure drop (unload)

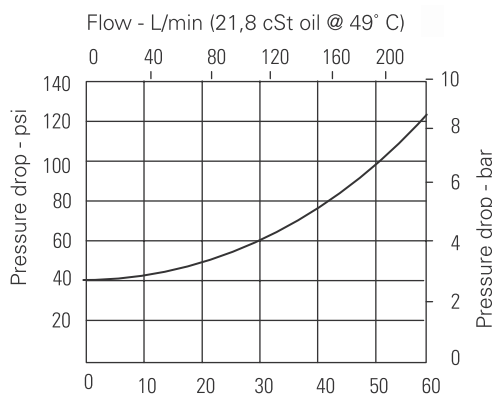

Pressure override

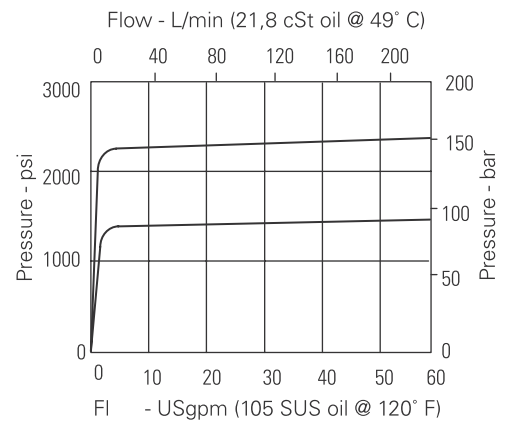

Description


Solenoid actuated relief valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-16 - Solenoid vented relief valve

Normally open or normally closed
225 L/min (60 USgpm) • 210 bar (3000 psi)

Model code



- 1 Function**
SRV - Solenoid actuated relief valve

- 2 Size**
16 - 16 size

- 3 Seal material**
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont

- 4 Type**
C - Normally closed
O - Normally open

- 5 Relief control**
C - Cap
K - Knob
S - Screw

- 6 Valve housing material**
A - Aluminum

7 Port size

Code	P, T	Gauge
8G	1" BSPP	1/4" BSPP
16T	SAE 16	SAE 4
12T	SAE 12	SAE 4

- 8 Relief Pressure range**
Note: Code based on pressure in psi.
15 - 3-100 bar (50-1500 psi)
30 - 70-210 bar (1000-3000 psi)

- 9 Voltage rating**
12D - 12 VDC
24D - 24 VDC
120A - 125 VAC
240A - 240 VAC

- 10 Connector types**
GS - ISO 4400 DIN 43650 connector
PS - 1/2" NPT conduit
WS - Lead wire


- 11 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
SV4-8-0-0-**-**	2 way/2 position N.O. poppet solenoid valve	1
SV4-8-C-0-0-**-**	2 way/2 position N.C. poppet solenoid valve	1
RV8-8-*0-0-**-**	Relief valve	1
DPS2-16-V-F-0-80	Differential pressure sensing valve	1

Dimensions

mm (inch)

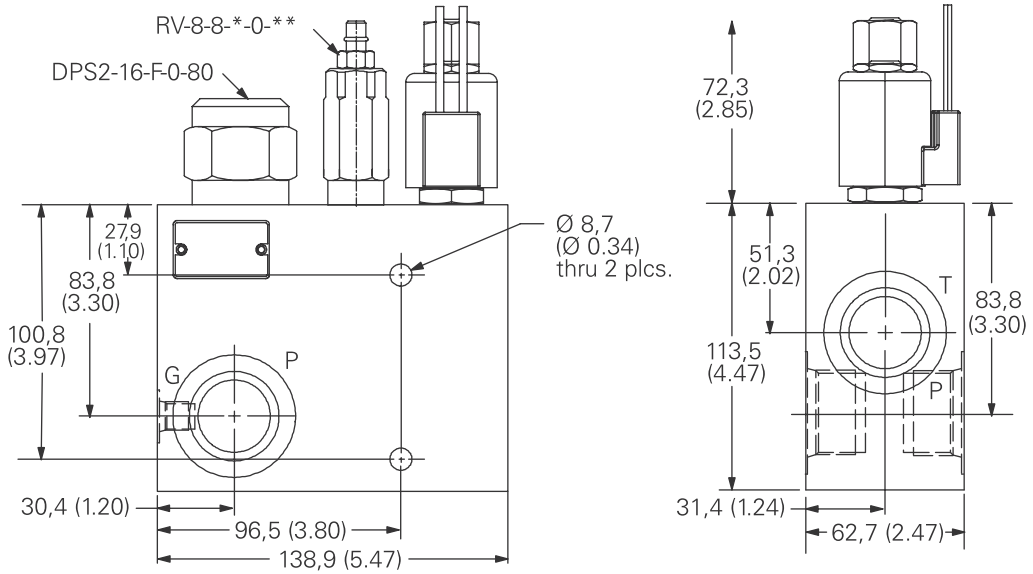


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-20 - Solenoid vented relief valve

Normally open or normally closed
 300 L/min (80 USgpm) • 210 bar (3000 psi)

Normally closed version

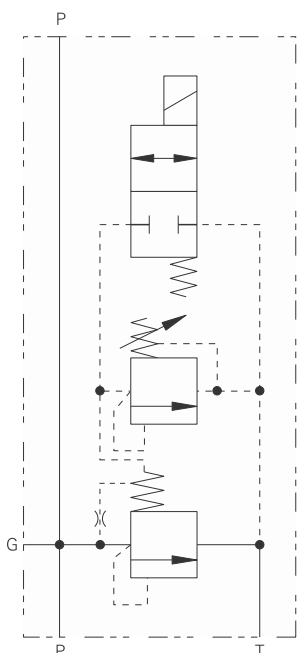

Operation

This standard valve package is designed for pump unloading via solenoid valve activation and pump relief, when the solenoid valve is not activated and system pressure reaches the relief valve setting.

Features

Normally closed and normally open options, tamper proof or adjustable relief options. Low power requirements, gauge port. Aluminum in-line type housing, number of voltage and connector options.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.


Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Flow rating	300 L/min (80 USgpm)
Internal leakage	160 cm ³ /min (10 in ³ /min) @ 210 bar (3000 psi)
Reseat pressure	80% of crack pressure
Typical vented ΔP	9 bar (135 psi) at rated flow
Coil specifications	Power requirements: 16 watts Coil duty: Continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.


Normally open version

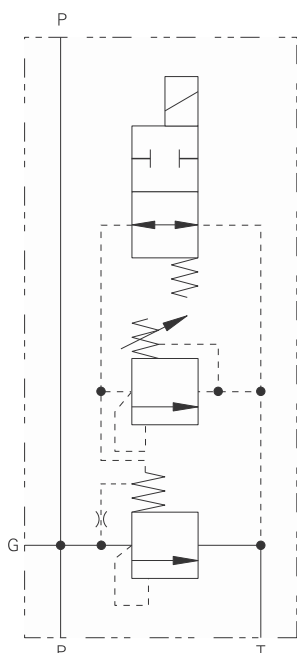

Pressure drop (unloading)

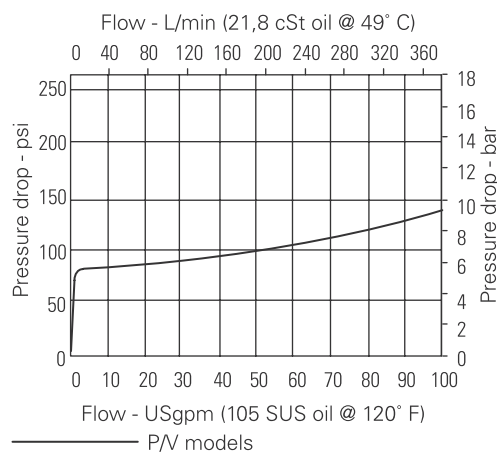

Pressure override

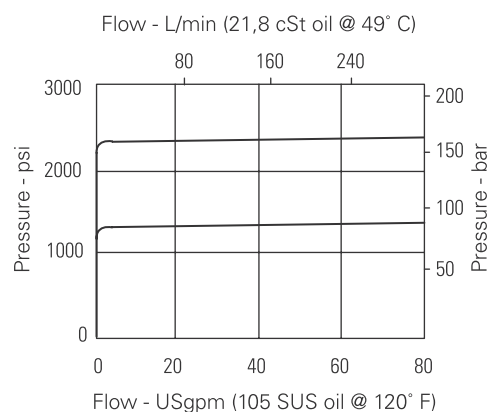

Description


Solenoid actuated relief valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SRV-20 - Solenoid vented relief valve

Normally open or normally closed
300 L/min (80 USgpm) • 210 bar (3000 psi)

Model code



1 Function

SRV - Solenoid actuated relief valve

2 Size

20 - 20 size

3 Seal material

Blank - Buna-N
V - Viton®

Viton is a registered trademark of E.I. DuPont

4 Type

C - Normally closed
O - Normally open

5 Relief control

C - Cap
K - Knob
S - Screw

6 Valve housing material

A - Aluminum

7 Port size

Code	P, T	Gauge	Housing
12G	1 1/4" BSPP	1/4" BSPP	02-178312
20T	SAE 20	SAE 4	02-178313

8 Relief Pressure range

Note: Code based on pressure in psi.

15 - 3-100 bar (50-1500 psi)
30 - 70-210 bar (1000-3000 psi)

9 Voltage rating

12D - 12 VDC
24D - 24 VDC
120A - 125 VAC
240A - 240 VAC

10 Connector types

GS - ISO 4400 DIN 43650 connector
PS - 1/2" NPT conduit
WS - Leadwire

11 Special features


00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
SV4-8-0-0-**	2 way/2 position N.O. poppet solenoid valve	1
SV4-8-C-0-**	2 way/2 position N.C. poppet solenoid valve	1
RV8-8-*0-**	Relief valve	1
DPS2-20-V-F-0-80	Differential pressure sensing valve	1

Dimensions

mm (inch)

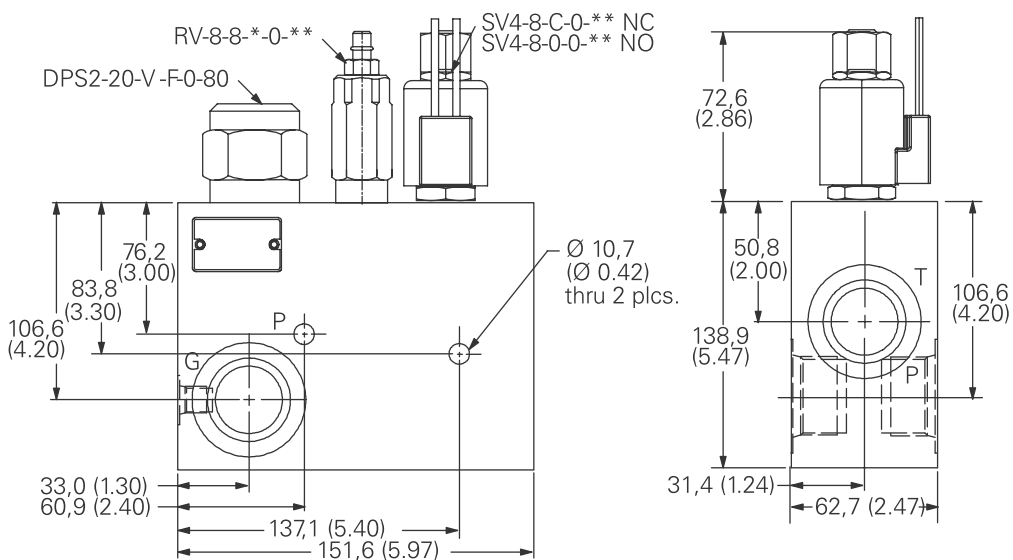


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

CRV-10 - Relief valve

Cross port

76 L/min (20 USgpm) • 17-210 bar (250-3000 psi)

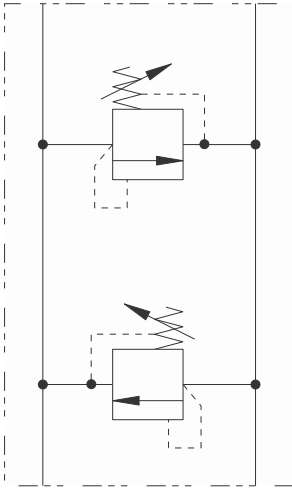

Operation

This standard valve package is used to provide pressure relief for bi-directional motors and cylinders.

Features

Tamper proof and adjustable relief options. Aluminum in-line type housing.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	17-210 bar (250-3000 psi)
Flow rating	76 L/min (20 USgpm)
Reseat pressure	90% of crack pressure
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Cross port relief valve.

Pressure override

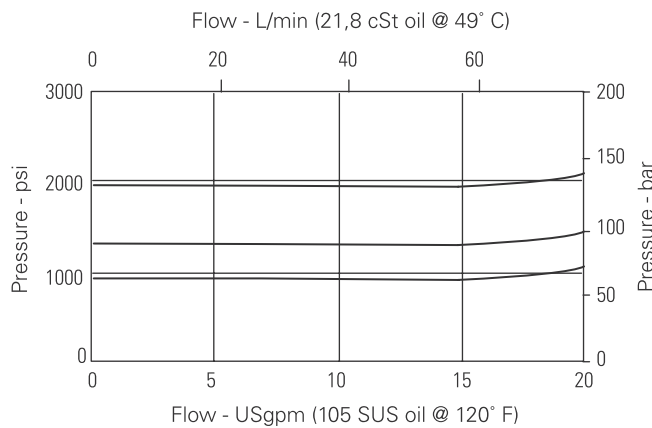


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

CRV-10 - Relief valve

Cross port
76 L/min (20 USgpm) • 17-210 bar (250-3000 psi)

Model code

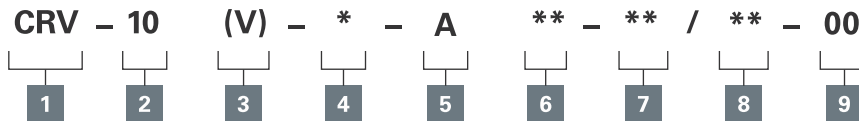


<p>1 Function CRV - Cross-port relief valve</p> <hr/> <p>2 Size 10 - 10 size</p> <hr/> <p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p> <hr/>	<p>4 Relief control C - Cap K - Knob S - Screw</p> <hr/> <p>5 Valve housing material A - Aluminum</p> <hr/>	<p>6 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Port size</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>3G</td> <td>3/8" BSPP</td> <td>02-178476</td> </tr> <tr> <td>8T</td> <td>SAE 8</td> <td>889185</td> </tr> </tbody> </table> <hr/> <p>7 Pressure Range Note: Code based on pressure in psi. 6 - 6-40 bar (100-600 psi) 36 - 40-250 bar (600-3600 psi)</p> <hr/> <p>8 Pressure Setting - user requested in 50 PSI steps Example: 10 - 1000 psi 10.5 - 1050 psi</p> <hr/>	Code	Port size	Housing number	3G	3/8" BSPP	02-178476	8T	SAE 8	889185	<p>9 Special Features 00 - None (Only required if valve has special features, omitted if "00".)</p> <hr/>
Code	Port size	Housing number										
3G	3/8" BSPP	02-178476										
8T	SAE 8	889185										

Composition chart

Cartridge	Description	Quantity
RV3A-10-*0-**	Relief valve	2

Dimensions

mm (inch)

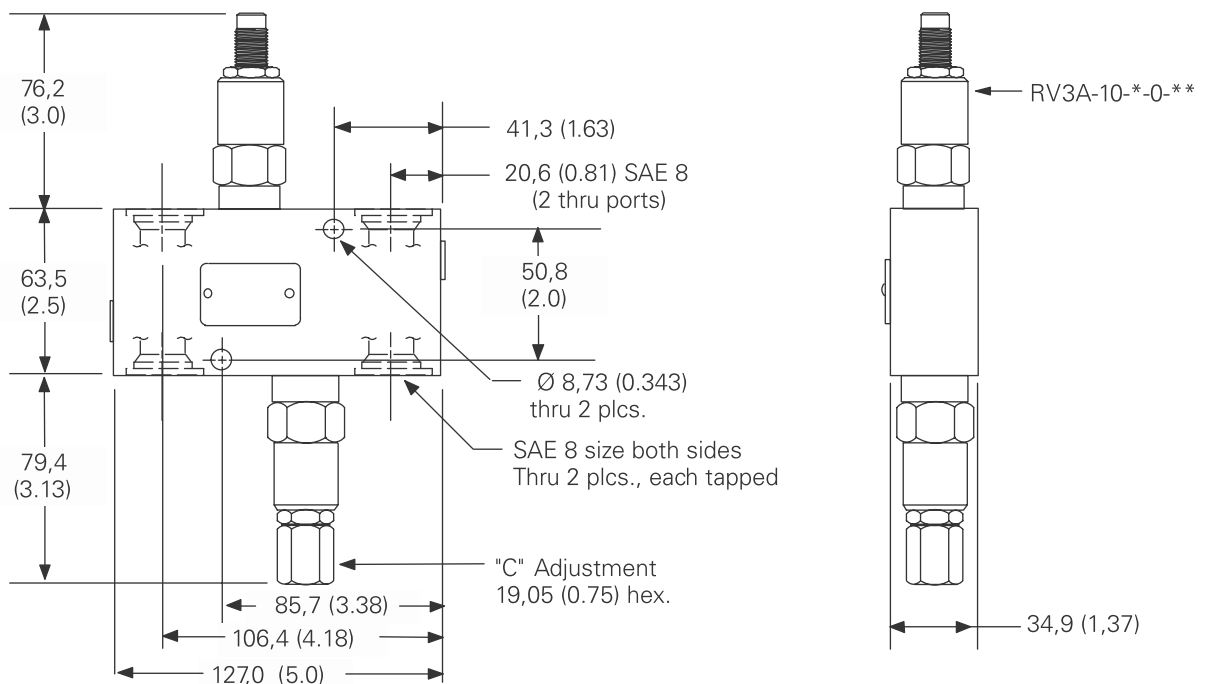


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

CRV-16 - Relief valve

Cross port

303 L/min (80 USgpm) • 17-172 bar (250-2500 psi)

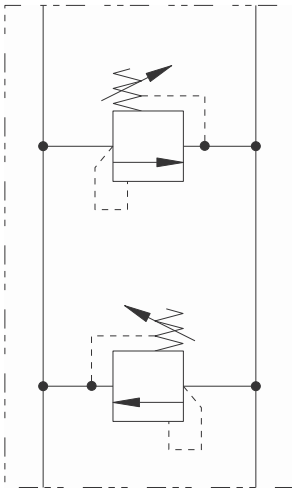

Operation

This standard valve package is used to provide pressure relief for bi-directional motors and cylinders.

Features

Tamper proof and adjustable relief options. Aluminum in-line type housing.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data

Ratings and specifications


Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	17-172 bar (250-2500 psi)
Flow rating	300 L/min (80 USgpm)
Reseat pressure	90% of crack pressure
Temperature range	-40° to 120° C (-40° to 248° F)
Fluids	All general purpose hydraulic fluids such as: MIL-H-5606, SAE 10, SAE 20, etc.

Description

Cross port relief valve.

Pressure override

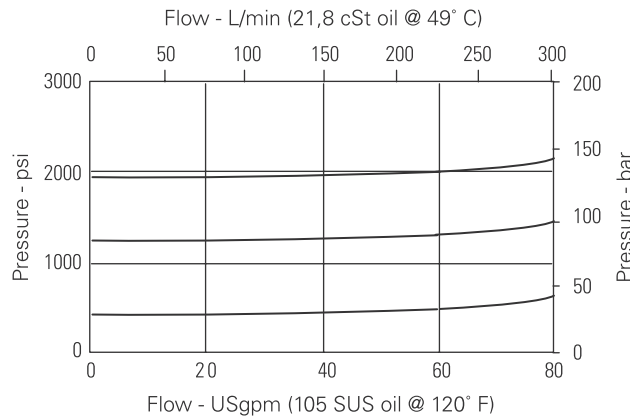


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

CRV-16 - Relief valve

Cross port
303 L/mim (80 USgpm) • 17-172 bar (250-2500 psi)

Model code

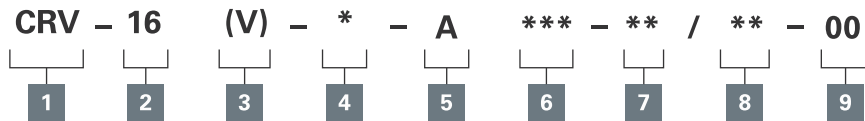


<p>1 Function CRV - Cross-port relief valve</p> <hr/> <p>2 Size 16 - 16 size</p> <hr/> <p>3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont</p> <hr/>	<p>4 Relief control C - Cap K - Knob S - Screw</p> <hr/> <p>5 Valve housing material A - Aluminum</p> <hr/>	<p>6 Port size</p> <table border="1"> <thead> <tr> <th>Code</th> <th>Port size</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>8G</td> <td>1" BSPP</td> <td>02-178477</td> </tr> <tr> <td>16T</td> <td>SAE 16</td> <td>889189</td> </tr> </tbody> </table> <hr/> <p>7 Pressure range Note: Code based on pressure in psi. 25 - 17-175 bar (250-2500 psi)</p> <hr/> <p>8 Pressure setting - user requested in 50 PSI steps Example: 10 - 1000 psi 10.5 - 1050 psi</p> <hr/>	Code	Port size	Housing number	8G	1" BSPP	02-178477	16T	SAE 16	889189	<p>9 Special features 00 - None (Only required if valve has special features, omitted if "00".)</p> <hr/>
Code	Port size	Housing number										
8G	1" BSPP	02-178477										
16T	SAE 16	889189										

Composition chart

Cartridge	Description	Quantity
RV3A-16-* -0-**	Relief valve	2

Dimensions

mm (inch)

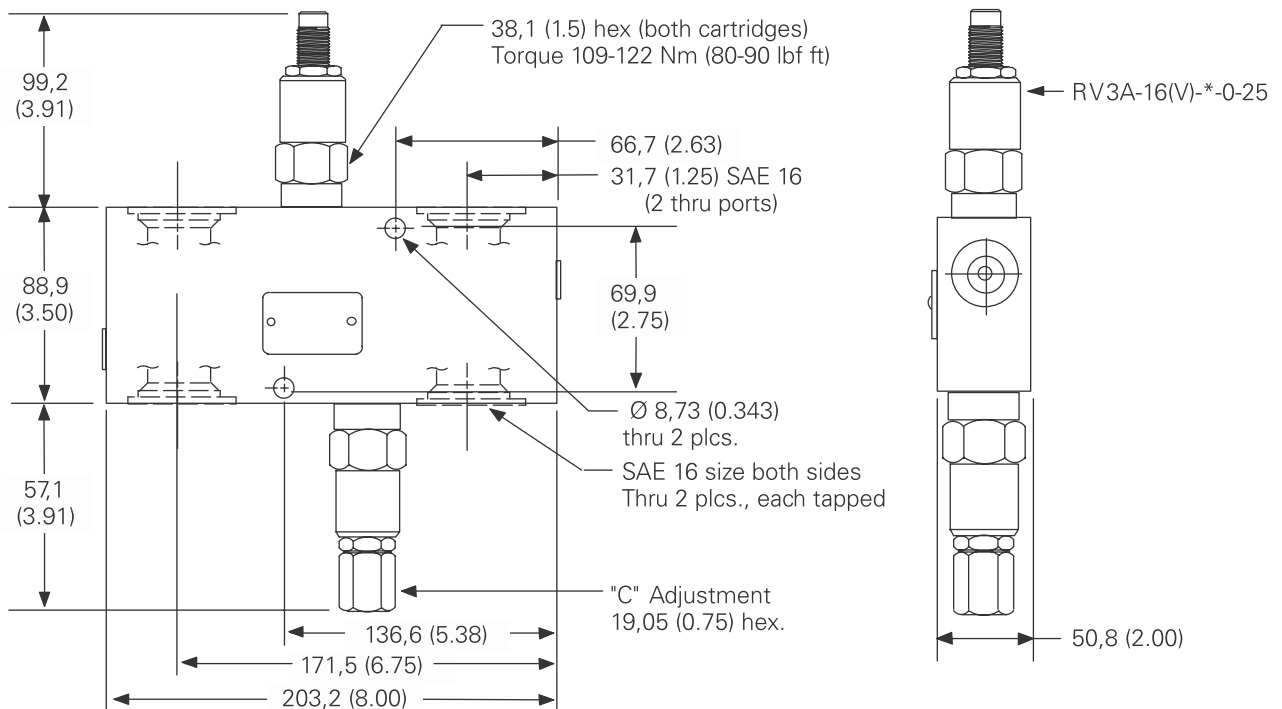


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RGV-30 - Regenerative valve

Pressure sensitive

30 L/min (8 USgpm) • 210 bar (3000 psi)

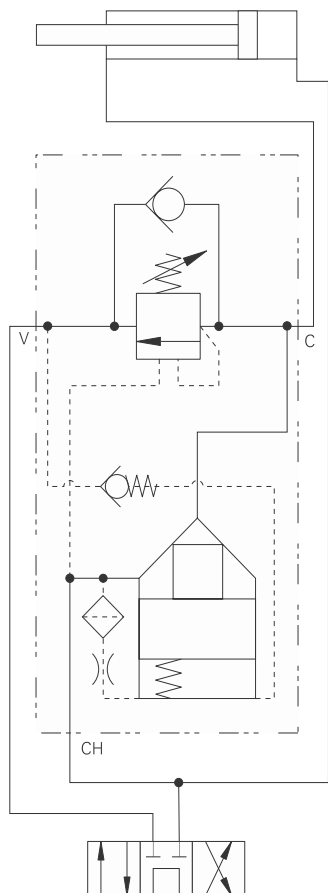

Operation

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following: Rod to diameter ratio. The pressure required to move a cylinder. Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

Features

Automatic kick out of regenerative operation made via load pressure sensing. Tamper proof and adjustable pressure setting options. Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve. Aluminum in-line type housing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regenerative flow Regeneration diminishes progressively above setting of 1CE30	30 L/min (8 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)


Notes: Regeneration circuits apply only to single rod cylinders in extension direction.

Description

Pressure sensitive regenerative valve package.

Pressure drop

- A - Port CR to CH
- B - Port VR to CR

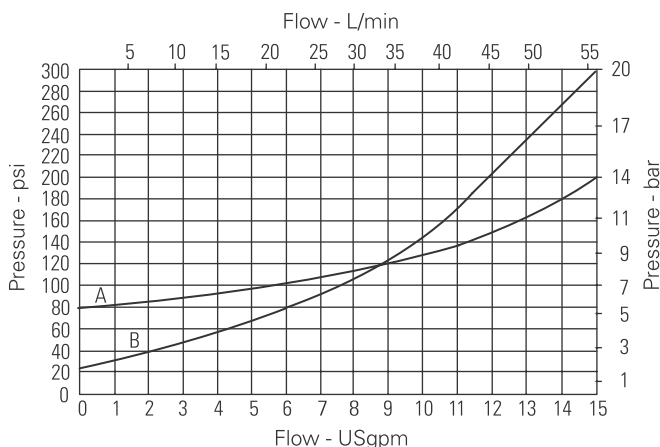


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RGV-30 - Regenerative valve

Pressure sensitive
30 L/min (8 USgpm) • 210 bar (3000 psi)

Model code

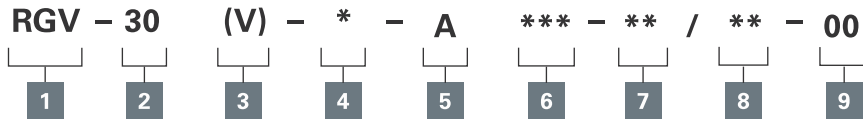

1 Function

RGV - Pressure sensitive regeneration valve

2 Size

30 - 10 size

3 Seal material

Blank - Buna-N

V - Viton®

Viton is a registered trademark of E.I. DuPont

4 Relief control

F - Screw adjustment

N - Fixed - State pressure setting required

5 Valve housing material

A - Aluminum

6 Port size

Code	Port size	Housing number
4G	1/2" BSPP	6029951-001
10T	SAE 10	6029950-001

7 Pressure range*

Note: Code based on pressure in psi.

20 - 70 - 210 bar. std. setting
100 bar

*System pressure is limited to 210 bar (3000 psi)

8 Pressure setting -

user requested in 50 PSI steps
Example:

10 - 1000 psi

10.5 - 1050 psi

9 Special features

00 - None

(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
1CE30-F-20-S-5	Counterbalance valve	1
DPS2-10-S-F-0-80	Differential pressure sensing	1
566395	Sense check kit	1

Application notes

Formulas to calculate flow in regeneration circuits are:
(where Db = Bore Diameter and Dr = Rod Diameter)


$$\text{Combined Flow (pump flow plus regenerative flow)} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

Dimensions

mm (inch)

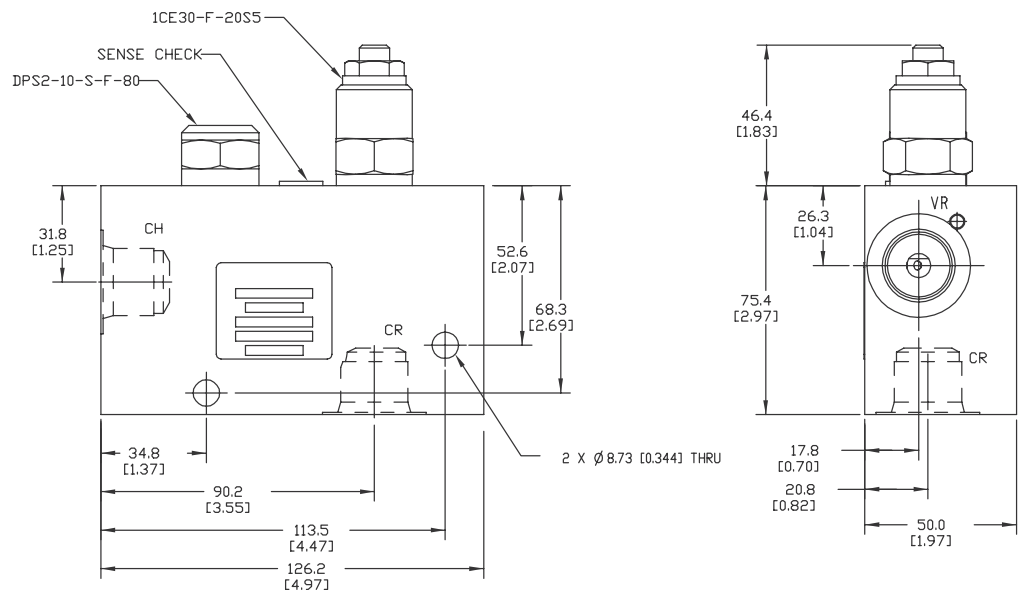


Note: This valve package should not be used as a load holding or load lowering control valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RGV-90 - Regenerative valve

Pressure sensitive

90 L/min (23 USgpm) • 210 bar (3000 psi)

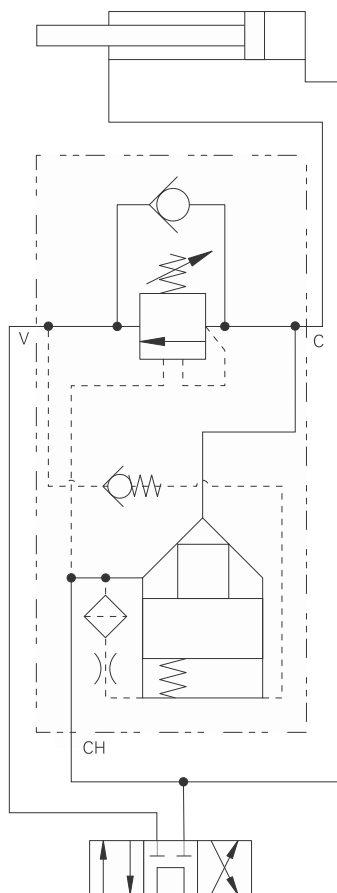

Operation

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following: Rod to diameter ratio. The pressure required to move a cylinder. Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

Features

Automatic kick out of regenerative operation made via load pressure sensing. Tamper proof and adjustable pressure setting options. Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve. Aluminum in-line type housing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cst (105 sus) and 49°c (120°f)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regenerative flow Regeneration diminishes progressively above setting of 1CE90	90 L/min (23 USgpm)
Temperature range	-40° to 102° C (-40° to 248° F)

Notes: Regeneration circuits apply only to single rod cylinders in extension direction.


Description

Pressure sensitive regenerative valve package.

Pressure drop

A - Port CR to CH

B - Port VR to CR

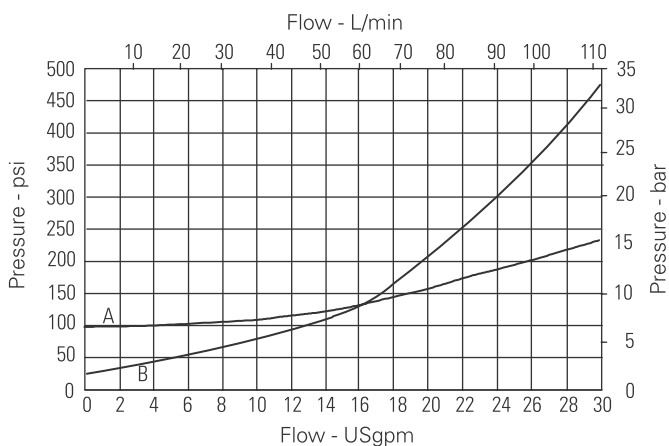


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RGV-90 - Regenerative valve

Pressure sensitive
90 L/min (23 USgpm) • 210 bar (3000 psi)

Model code

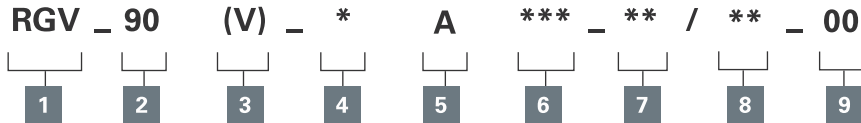

- 1 Function**
RGV - Pressure sensitive regeneration valve
- 2 Size**
90 - 12 size
- 3 Seal material**
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont

- 4 Relief control**
F - Screw adjustment
N - Fixed - State pressure setting required
- 5 Valve housing material**
A - Aluminum

Code	Port size	Housing number
6G	3/4" BSPP	6029914-001
12T	SAE 12	6029909-001

- 7 Pressure range***
Note: Code based on pressure in psi.
20 - 70 - 225 bar. std. setting
100 bar
*System pressure is limited to 210 bar (3000 psi)
- 8 Pressure setting -**
user requested in 50 PSI steps Example:
10 - 1000 psi
10.5 - 1050 psi

- 9 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
1CE90-F-20-* -4	Counterbalance valve	1
DPS2-16-S-F-0-80	Differential pressure sensing	1
566395	Sense check kit	1

Application Notes

Formulas to calculate flow in regeneration circuits are: (where Db = Bore Diameter and Dr = Rod Diameter)


$$\text{Combined Flow (pump flow plus regenerative flow)} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

Dimensions

mm (inch)

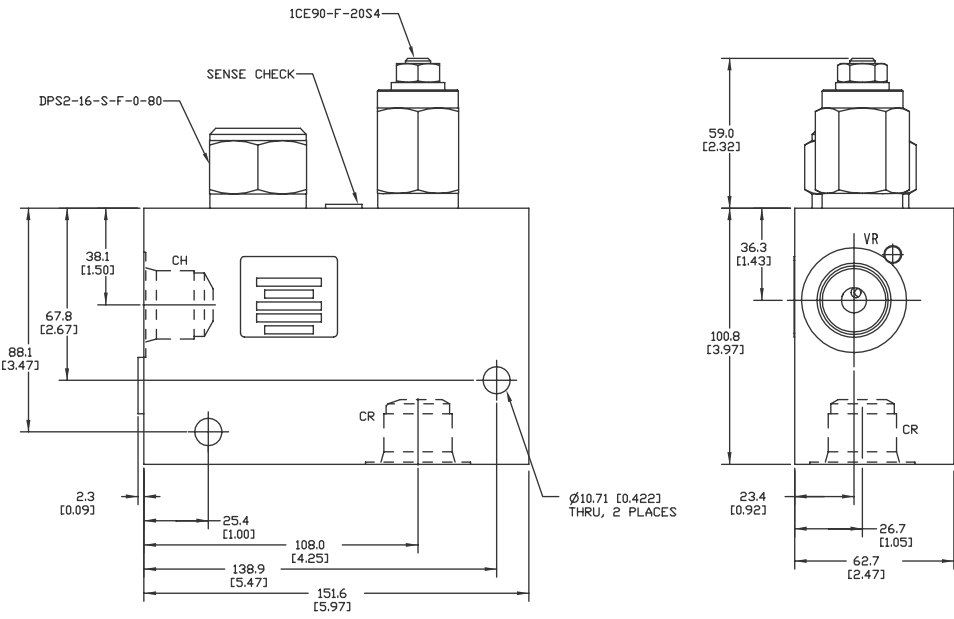


Notes: This valve package should not be used as a load holding or load lowering control valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RLV-30 - Regenerative valve

With load locking
30 L/min (8 USgpm) • 210 bar (3000 psi)

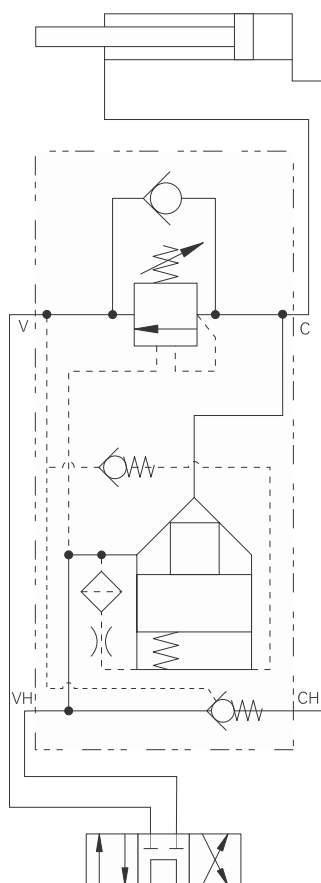

Operation

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following: Rod to diameter ratio. The pressure required to move a cylinder. Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

Features

Automatic kick out of regenerative operation made via load pressure sensing. Tamper proof and adjustable pressure setting options. Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve. Provides manual override on POC cartridge to lower the load in the event of power loss. Aluminum in-line type housing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regenerative flow Regeneration diminishes progressively above setting of 1CE30	30 L/min (8 USgpm)
Temperature range	-40° to 120° C (-40° to 248° F)


Notes: Regeneration circuits apply only to single rod cylinders in extension direction.

Description

Pressure sensitive regenerative valve package with load locking.

Pressure drop

- A** - Port CR to CH
- B** - Port VR to CR
- C** - Port VH to CH

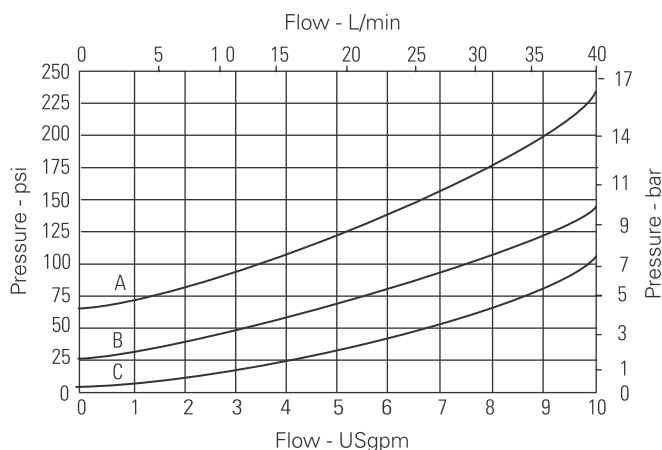


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RLV-30 - Regenerative valve

With load locking
30 L/min (8 USgpm) • 210 bar (3000 psi)

Model code



- 1 Function**
RLV - Pressure sensitive regeneration valve with load holding check valve.
- 2 Size**
10 - 10 size
- 3 Seal material**
Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont

- 4 Relief control**
F - Screw adjustment
N - Fixed - Stare pressure setting required
- 5 Valve housing material**
A - Aluminum

- 6 Port size**

Code	Port size	Housing number
4G	1/2" BSPP	6029965-001
10T	SAE 10	6029964-001
- 7 Pressure range***
Note: Code based on pressure in psi.
20 - 70 - 210 bar. std. setting 100 bar
*System pressure is limited to 210 bar (3000 psi)
- 8 Pressure setting -**
user requested in 50 PSI steps Example:
10 - 1000 psi
10.5 - 1050 psi
- 9 Special features**
00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
1CE30-F-*20-*4	Counterbalance valve	1
DPS2-10-S-F-0-80	Differential pressure sensing	1
4CK30-1S3	Pilot operated check valve	1
566395	Sense check kit	1

Application notes

Formulas to calculate flow in regeneration circuits are:
(where Db = Bore Diameter and Dr = Rod Diameter)


$$\text{Combined Flow (pump flow plus regenerative flow)} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

Dimensions

mm (inch)

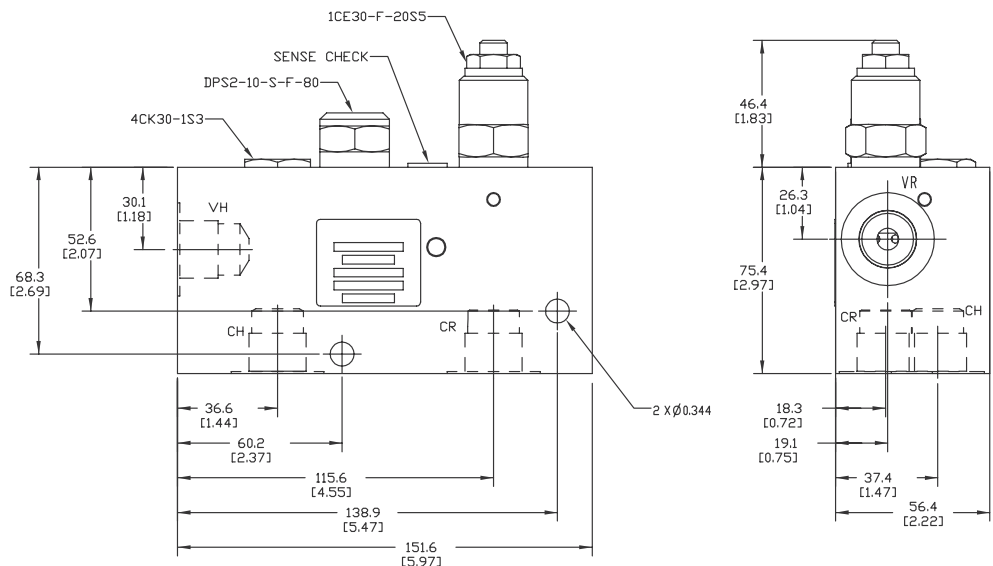


Notes: This valve package should not be used as a load holding or load lowering control valve.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RLV-90 - Regenerative valve

With load locking
 90 L/min (23 USgpm) • 210 bar (3000 psi)

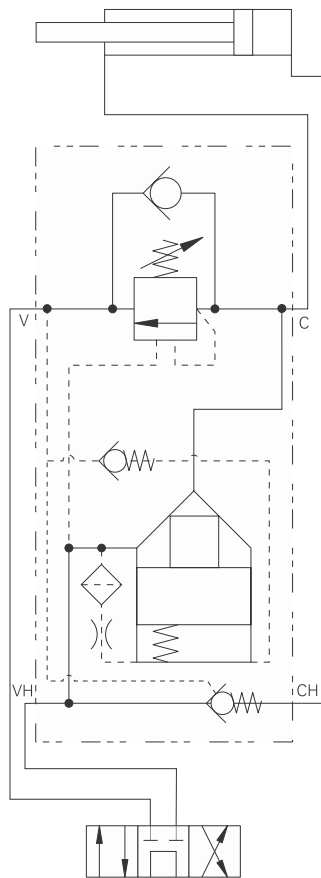

Operation

This standard valve package provides means for fast extension of a cylinder at low pressure without additional pump flow. This package diverts rod end flow to the head end in order to accelerate the load. When the load induced pressure reaches a predetermined level, the valve closes off. Rod end oil is automatically diverted to tank and the full pump pressure is applied, allowing maximum force to develop at lower speed.

When applying pressure sensitive regenerative valves consider the following: Rod to diameter ratio. The pressure required to move a cylinder. Losses due to high flows and seal friction may prevent a circuit from staying in regeneration.

Features

Automatic kick out of regenerative operation made via load pressure sensing. Tamper proof and adjustable pressure setting options. Provides a smooth transition and decrease of the regenerative flow through use of a counterbalance valve. Provides manual override on POC cartridge to lower the load in the event of power loss. Aluminum in-line type housing.

Performance data

Ratings and specifications

Performance data is typical with fluid at 21,8 cST (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)
Maximum regenerative flow	90 L/min (23 USgpm)
Regeneration diminishes progressively above setting of 1CE90	
Temperature range	-40° to 120° C (-40° to 248° F)


Notes: Regeneration circuits apply only to single rod cylinders in extension direction.

Description

Pressure sensitive regenerative valve package with load locking.

Pressure drop

- A** - Port CR to CH
- B** - Port VR to CR
- C** - Port VH to CH

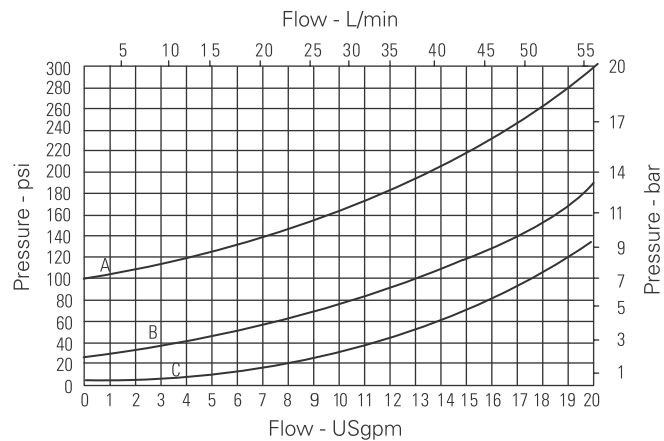


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

RLV-90 - Regenerative valve

With load locking
90 L/min (23 USgpm) • 210 bar (3000 psi)

Model code

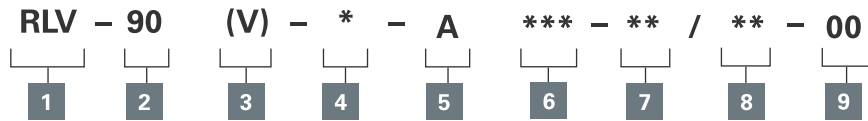

1 Function

RLV - Pressure sensitive regeneration valve w/ load holding check valve

2 Size

90 - 12 size

3 Seal material

Blank - Buna-N
V - Viton®
Viton is a registered trademark of E.I. DuPont

4 Relief control

F - Screw adjustment
N - Fixed - Stare pressure setting required

5 Valve housing material

A - Aluminum

6 Port size

Code	Port Size	Housing number
6G	3/4" BSPP	02-178936
12T	SAE 12	02-178935

7 Pressure range*

Note: Code based on pressure in psi.
20 - 70 - 225 bar. std setting 100 bar
*System pressure is limited to 210 bar (3000 psi)

8 Pressure setting - user requested in 50 PSI steps

Example:
10 - 1000 psi
10.5 - 1050 psi

9 Special features

00 - None
(Only required if valve has special features, omitted if "00".)

Composition chart

Cartridge	Description	Quantity
1CE90-F-20-* -4	Counterbalance valve	1
DPS2-16-S-F-0-80	Differential pressure sensing	1
POC1-12-S-0-005	Pilot operated check valve	1
566395	Sense check kit	1

Application Notes

Formulas to calculate flow in regeneration circuits are:
(where Db = Bore Diameter and Dr = Rod Diameter)


$$\text{Combined Flow (pump flow plus regenerative flow)} = \frac{Db^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Regenerative Flow (flow out rod end)} = \frac{Db^2 - Dr^2}{Dr^2} \times \text{Pump Flow}$$

$$\text{Retraction Flow (flow out of the bind end during retraction)} = \frac{Db^2}{Db^2 - Dr^2} \times \text{Pump Flow}$$

Dimensions

mm (inch)

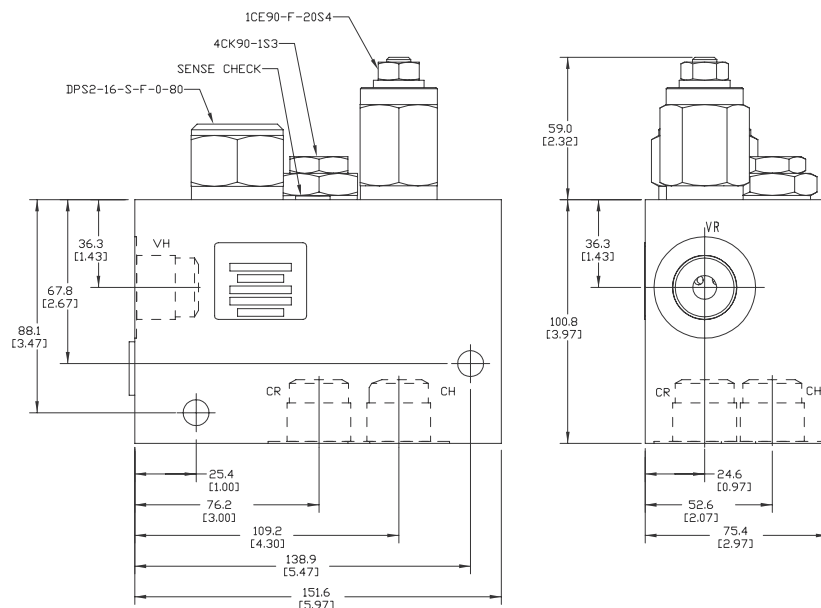

Notes: This valve package should not be used as a load holding or load lowering control valve.


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SCR-1 - Cross port relief

With shuttle and solenoid vent

Up to 114 L/min (30 USgpm) • 210 bar (3000 psi)

Normally open version

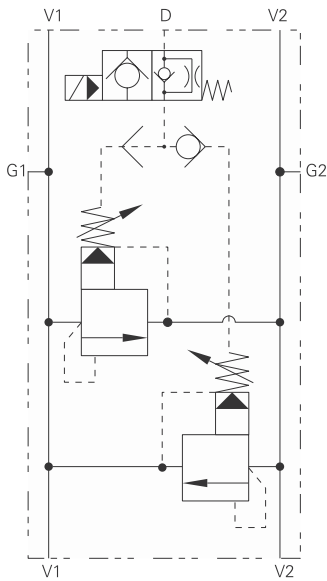

Operation

This standard valve package is used to provide pressure line relief for bi-directional motors and cylinders. With the addition of a remotely controlled shuttle valve, allowance is made for motor slip or cylinder dump conditions.

Features

Normally closed and normally open options. Tamper proof or adjustable relief options, gauge port. Low power requirements, number of voltages and connectors options. Aluminum in line type housing.

All components in the package are true cartridges and can be removed from the housing without disturbing the plumbing.

Performance data


Ratings and specifications

Performance data is typical with fluid at 21,8 cSt (105 SUS) and 49°C (120°F)

Typical application pressure (all ports)	210 bar (3000 psi)	
Flow rating	114 L/min (30 USgpm)	
Reseat pressure	90% of crack pressure	
Coil specifications	Power requirements:	16 watts Magnet wire – UL class N rated (200° C)
	Coil duty:	Continuous from 85% to 110% of nominal voltage (AC coils are internally rectified)
Temperature range	-40° to 120° C (-40° to 248° F)	

Notes: Regeneration circuits apply only to single rod cylinders in extension direction.


Normally closed version

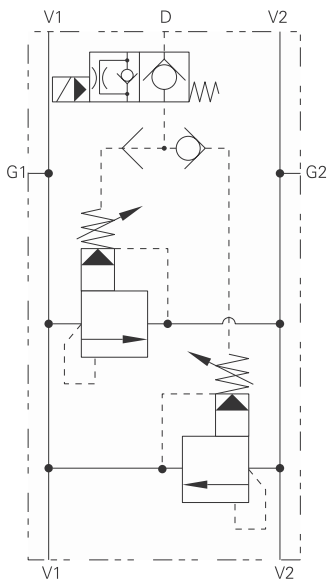

Pressure drop

A - 30 - pressure range code

B - 15 - pressure range code

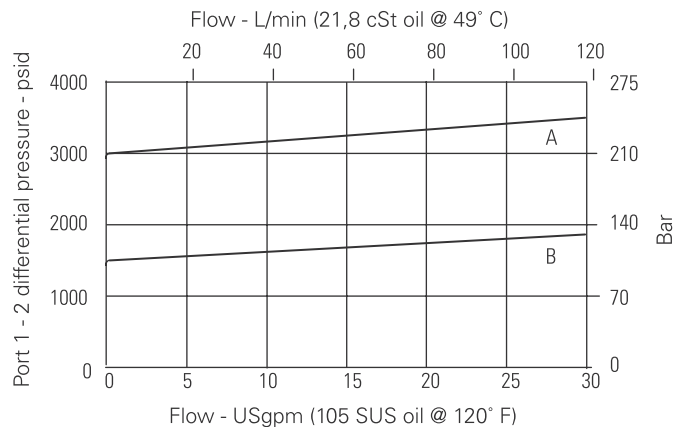

Description


Cross port relief with shuttle and solenoid vent.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

SCR-1 - Cross port relief

With shuttle and solenoid vent
Up to 114 L/min (30 USgpm) • 210 bar (3000 psi)

Model code




1 Function SCR - Solenoid actuated crossover relief valve with shuttle	5 Relief control C - Cap K - Knob S - Screw	10 Voltage rating 12D - 12 VDC 24D - 24 VDC 120A - 120 VAC 240A - 240 VAC															
2 Size 1 - 114 L/min (30 USgpm)	6 Valve housing material A - Aluminum	11 Connector types GS - ISO 4400 DIN 43650 connector PS - 1/2" NPT conduit WS - Leadwire															
3 Seal material Blank - Buna-N V - Viton® Viton is a registered trademark of E.I. DuPont	7 Port size <table border="1"> <thead> <tr> <th>Code</th> <th>V1, V2</th> <th>Gauge</th> <th>Drain</th> <th>Housing number</th> </tr> </thead> <tbody> <tr> <td>6G</td> <td>3/4" BSPP</td> <td>1/4" BSPP</td> <td>3/8" BSPP</td> <td>02-178938</td> </tr> <tr> <td>12T</td> <td>SAE 12</td> <td>SAE 4</td> <td>SAE 6</td> <td>02-178937</td> </tr> </tbody> </table>	Code	V1, V2	Gauge	Drain	Housing number	6G	3/4" BSPP	1/4" BSPP	3/8" BSPP	02-178938	12T	SAE 12	SAE 4	SAE 6	02-178937	12 Special features 00 - None (Only required if valve has special features, omitted if "00".)
Code	V1, V2	Gauge	Drain	Housing number													
6G	3/4" BSPP	1/4" BSPP	3/8" BSPP	02-178938													
12T	SAE 12	SAE 4	SAE 6	02-178937													
4 Type C - Normally closed O - Normally open	8 Pressure range* Note: Code based on pressure in psi. 15 - 5-100 bar (75-1500 psi) 30 - 10-210 bar (150-3000 psi) *System pressure is limited to 210 bar (3000 psi)	9 Pressure setting - user requested in 50 psi steps Example: 10 - 1000 psi 10.5 - 1050 psi															

Composition chart

Cartridge	Description	Quantity
VRV11-12-*0-**/	Ventable relief valve	2
DSV2-8-B-0	Shuttle valve	1
SV5-8-C-0-**	Solenoid valve, N.C.	1
SV5-8-O-0-**	Solenoid valve, N.O.	1

Dimensions

mm (inch)

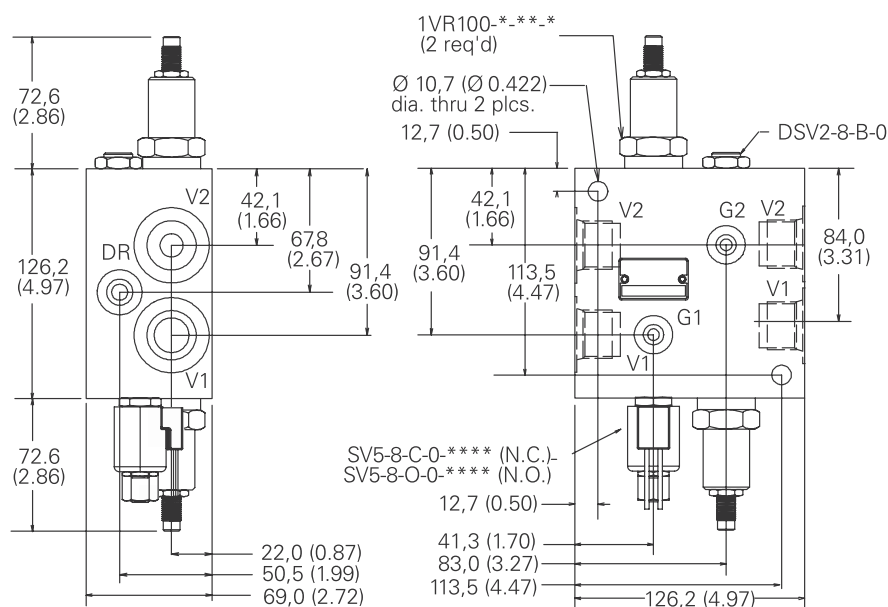


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

IUL255 - Unloading valve

Two pump

Up to 200 L/min (40 USgpm) • 350 bar (5000 psi)

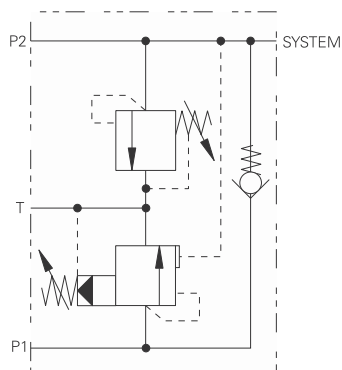

Operation

Pump inlet to P1 and P2 is combined to give maximum flow at low pressure. When the load pressure increases to the valve setting the high flow (low pressure) pump is bypassed from P1 to tank allowing nearly all system power to be used for the high pressure pump.

(See graph for the pressure drop of the dumped flow). The system relief valve provides protection by limiting the maximum pressure in the system line.

Features

This is a self contained system including two replaceable cartridges with full adjustment through their respective ranges. Hardened working components give long, trouble-free life and single body reduces plumbing to a minimum.

Performance data

Ratings and specifications

Performance data is typical with fluid at 32 cST (150 SUS)


Rated flow	low flow/high pressure (P2) 150 L/min (40 USgpm) high flow/low pressure (P1) 200 L/min (52 USgpm)
Max setting	350 bar (5000 psi)
Cartridge material	Working parts hardened & ground steel External surface zinc plated
Body material	Standard - steel
Mounting position	Unrestricted
Weight	3.15 kg (6.93 lbs)
Seal kit number	SK671 (Nitrile) SK671V (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194° F)
Nominal viscosity range	5 to 500 cSt

Viton is a registered trademark of E.I. DuPont

Description

Two-pump unloader valves are used in systems with combinations of two (or more) pumps to give high flow at low pressure and high pressure at low flow. The valves bypass the flow from the low pressure pump(s) to tank at a pre-set pressure. This allows pump selection to give, for example, rapid advance and high power compaction with the most economic usage of system components and energy requirements.

Pressure drop

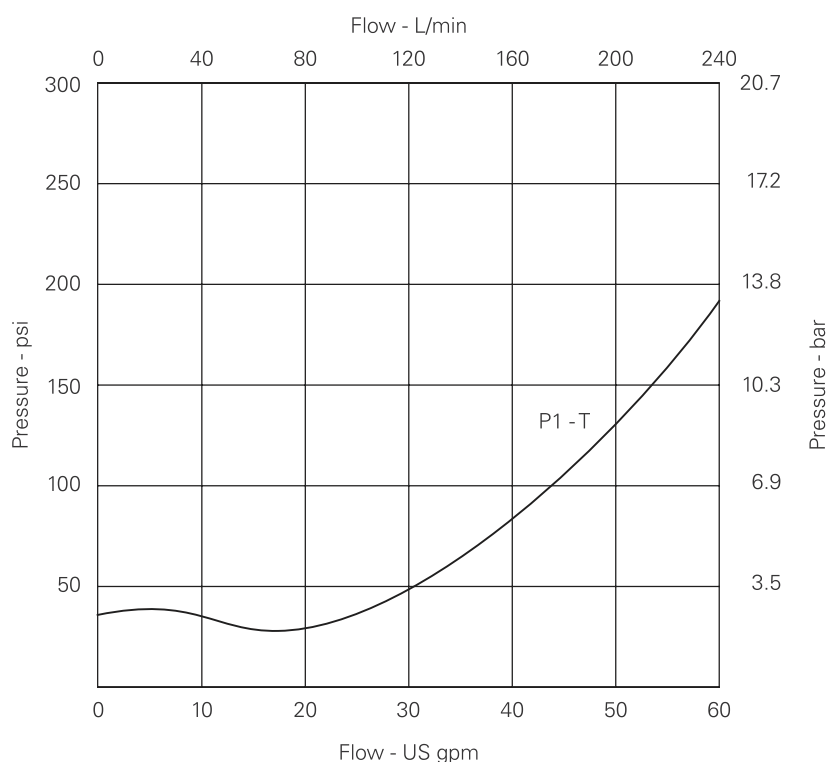


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

IUL255 - Unloading valve

Two pump
Up to 200 L/min (40 USgpm) • 350 bar (5000 psi)

Model code



1 Basic code

1UL255 - Complete Valve

2 Adjustment means

P - Leakproof Screw Adjustment

3 Port sizes -

4 Adjustable low pressure range

Note: Code based on pressure in bar.

- 20** - 30-210 bar.
Std setting 100 bar
- 35** - 150-350 bar.
Std setting 200 bar

5 Adjustable high pressure range

Note: Code based on pressure in bar.

- 17** - 35-175 bar.
Std setting 105 bar
- 28** - 75-285 bar.
Std setting 175 bar
- 35** - 114-350 bar.
Std setting 280 bar

6 Seals

- S** - Nitrile (For use with most industrial hydraulic oils)
- SV** - Viton (For high temperature and most special fluid applications)


Code	System PI & T	P2	Housing number (steel)
6W-4W	3/4" BSPP	1/2" BSPP	BXP24051-6W-4W-S-377

Dimensions

mm (inch)

Complete Valve


Basic Code: 1UL255

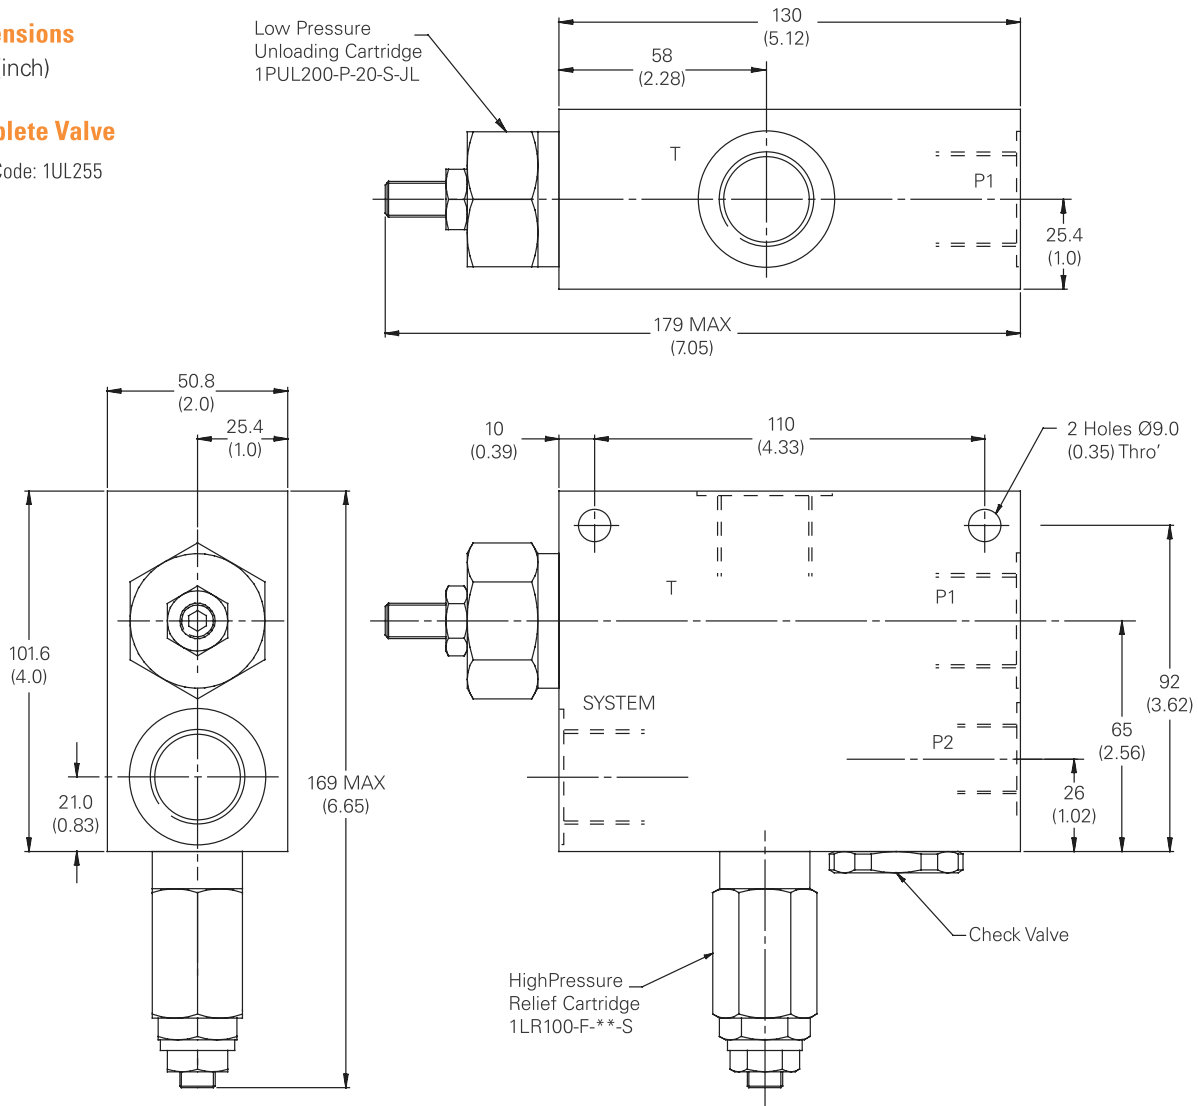

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.



**HYDRAULIC
CONTROLS** Pty Ltd

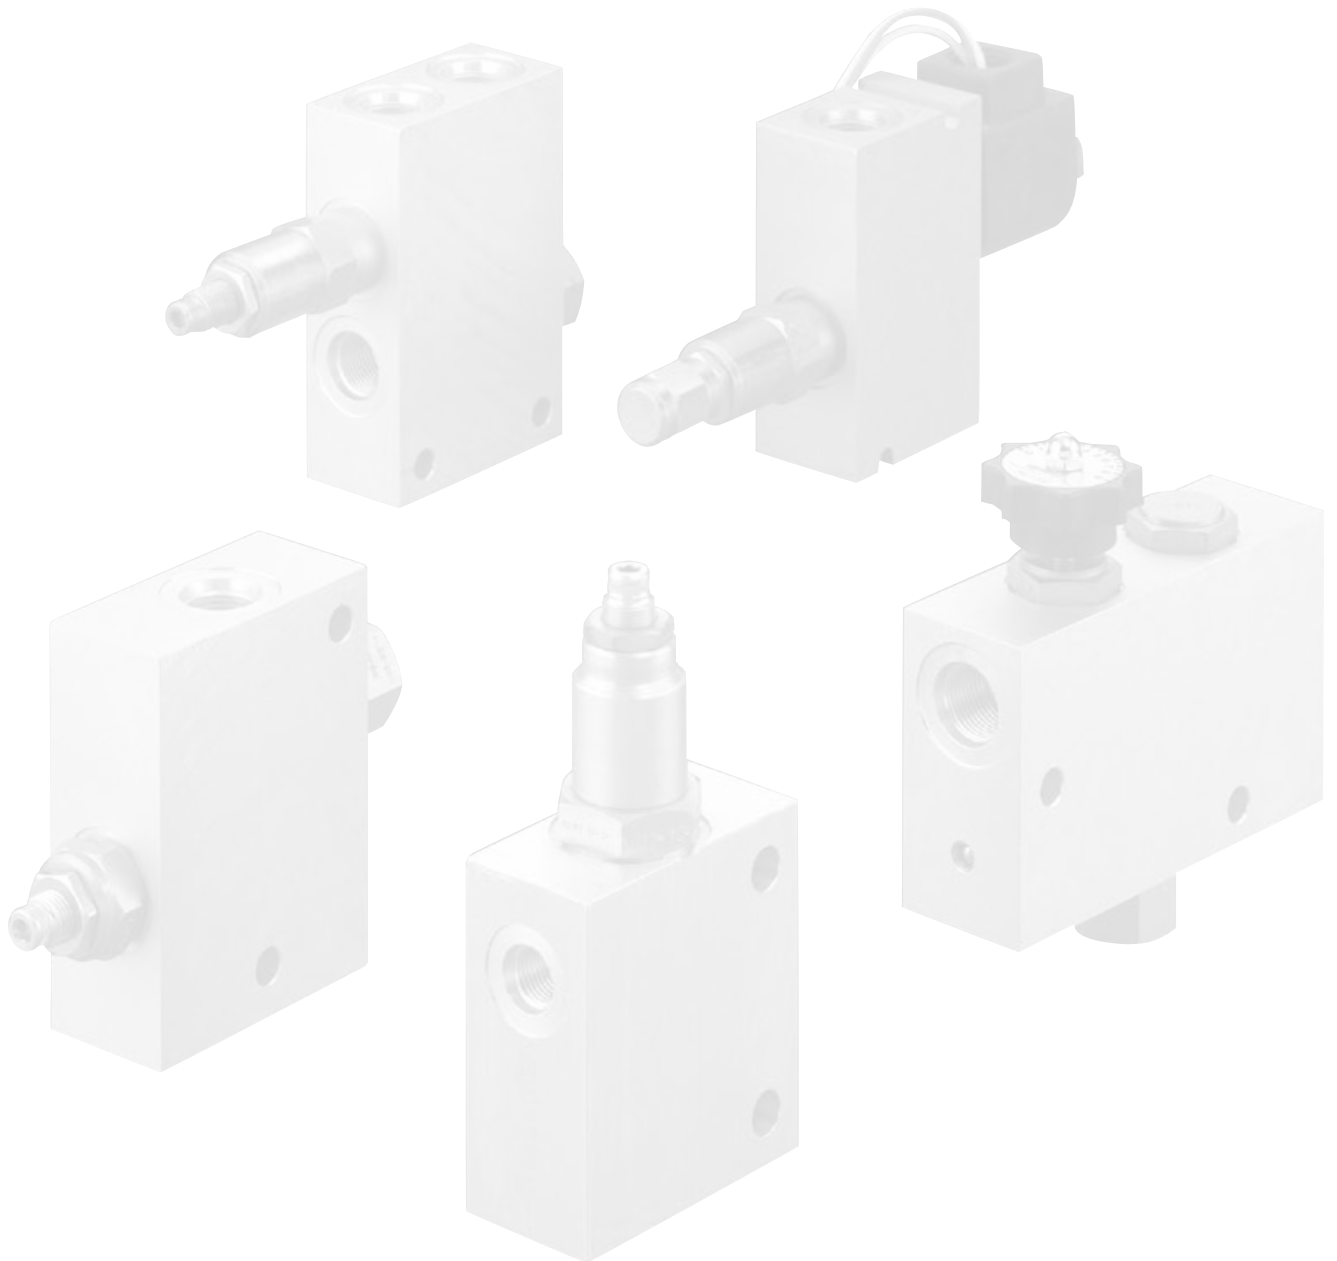

K

Special housings - bolt on solutions


cartridge valves & manifolds for spool & disk valve motors

We manufacture solutions

Designing hydraulic systems with Hydraulic Controls' Cartridge Valves and Manifolds is a cost effective way of bringing your design into production well within the most demanding of production schedules. Minimizing the use of hoses, tubing and fittings will reduce production and assembly time significantly.

Features

- Compatible with HCL H & T series spool valve motors, and most 2000 series disk valve motors
- Aluminum Manifolds Anodized Black
- Pre-set cartridges to your specifications
- 100% production tested assembly
- Wide range of settings available
- Intelligent model code
- Manifolds are available with out cartridge valves, or pre-assembled and tested to your specifications
- Manifolds and motors can be supplied as a pre-assembled package
- Dual counterbalance valve (with integral shuttle valve), dual pilot operated check valve and dual cross port relief valve packages are available

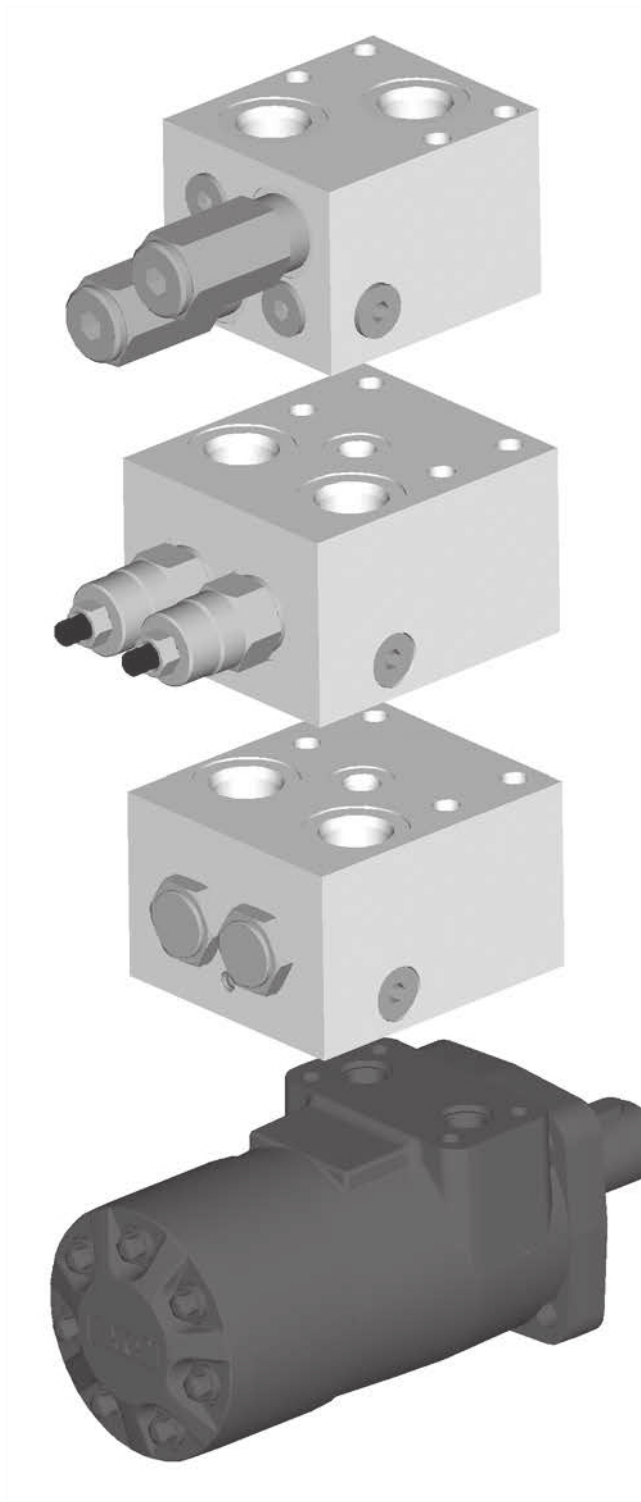

HCL H Series Hydraulic Motor

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

Dual cross-over relief package for H&T series motors

Cartridge valves & manifolds for spool valve motors

Dual crossover relief valve assembly

This valve assembly provides motor over-pressure protection in both directions of rotation, while supplying the return or lower pressure side of the motor with makeup oil. If closed center valving is used, an additional function is controlled braking.

Typical applications are vehicle propulsion and motor work circuits in which pressure limiting is required.

How to order

Complete pre-assembled packages are specified using the RV3A-10 model code. Option "A" must be

selected for the cage seals, position 6 of the model code is "H". To order the manifold separately,


without the two RV3A cartridges, order the part number 4997062-001.

Ratings and specifications

Rated flow	76 L/min(20USgpm)
Rated pressure	210 bar (3000psi)
Internal leakage (maximum)	less than 5 drops/min @ 85% of nominal setting
Manifold sub-assembly only	4997060
Installation kit (includes cap screws, washers and o-rings)	02-372492


For detailed specifications refer to the RV3A-10 data sheet on page E-210

Functional symbol

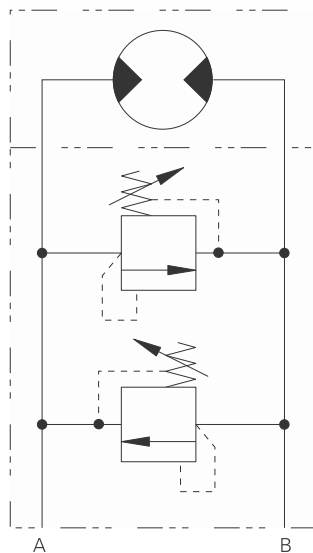

Dimensions

mm (inch)

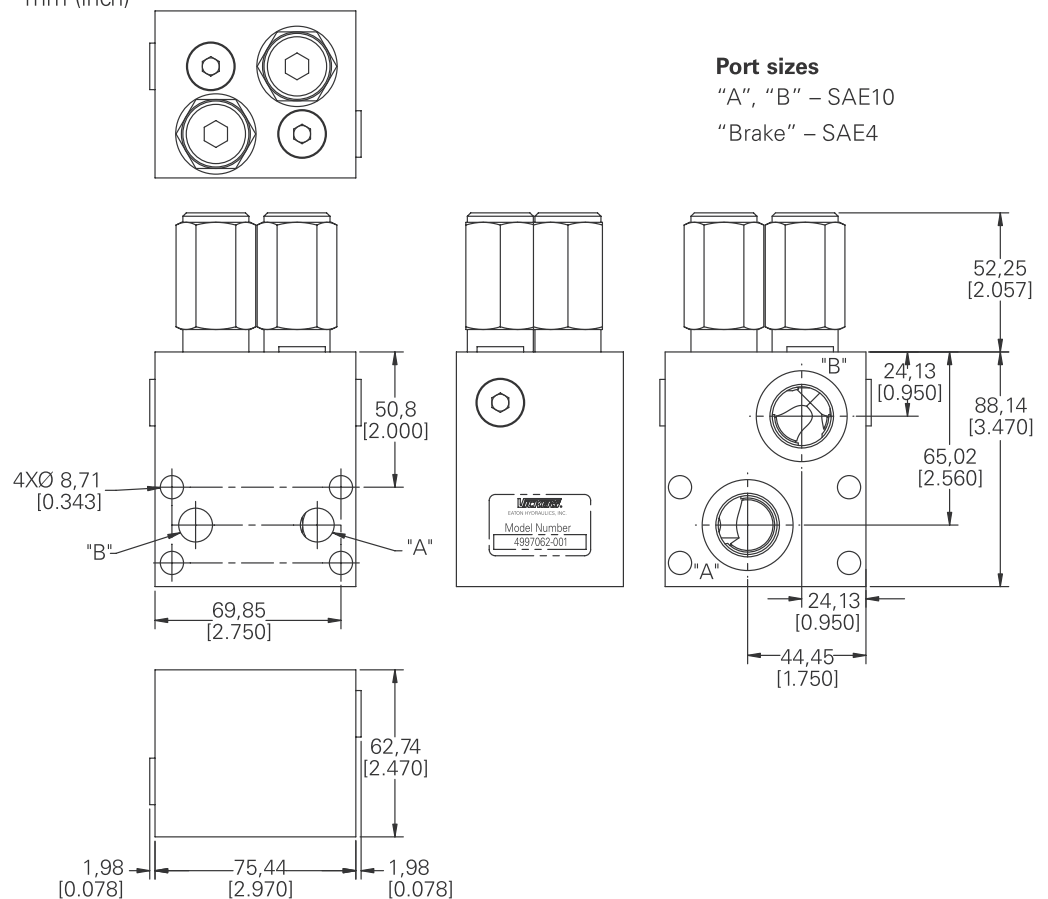

Port sizes

"A", "B" – SAE10

"Brake" – SAE4

Dual cross-over relief package for 2000 series disc valve motors

Cartridge valves & manifolds for spool valve motors

Dual crossover relief valve assembly

This valve assembly provides motor over-pressure protection in both directions of rotation, while supplying the return or lower pressure side of the motor with makeup oil. If closed center valving is used, an additional function is controlled braking.

Typical applications are vehicle propulsion and motor work circuits in which pressure limiting is required.

How to order

Complete pre-assembled packages are specified using the RV3A-10 model code. Option "A" must be selected for the cage seals, position 6 of the model code is "2K".


To order the manifold separately, without the two RV3A cartridges, order 4997060-001

Ratings and specifications

Rated flow	76 L/min(20USgpm)
Rated pressure	210 bar (3000psi)
Internal leakage (maximum)	less than 5 drops/min @ 85% of nominal setting
Manifold sub-assembly only	4997060-001
Installation kit (includes cap screws, washers and o-rings)	02-372492


For detailed specifications refer to the RV3A-10 data sheet on page E-14

Functional symbol

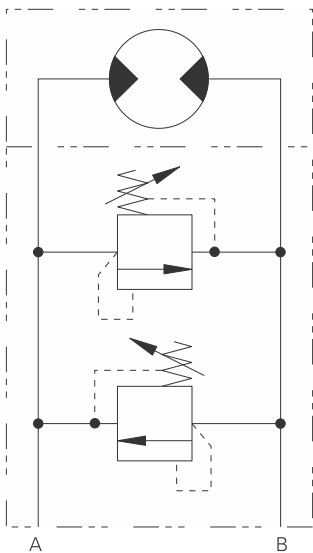

Dimensions

mm (inch)

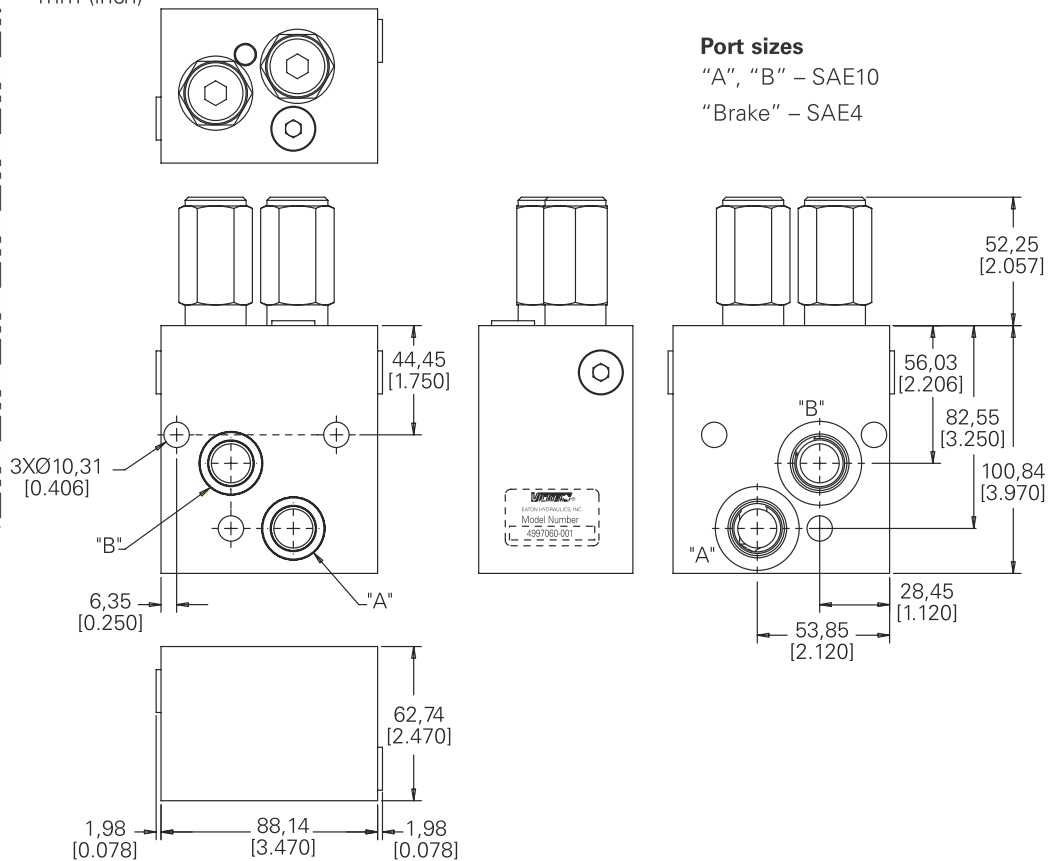

Port sizes

"A", "B" – SAE10

"Brake" – SAE4


Warning

This manifold package may not be suitable for application with all 2000 series motors - please check installation dimensions carefully.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CESHHT35/1CEESHHT35 - Motor mounted valves

H & T mounting pattern single and dual overcenter valve with brake release shuttle

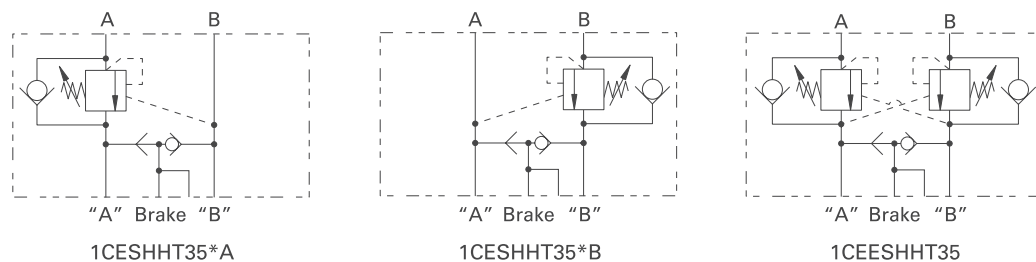

Description

Overcenter Valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

These dual overcenter valves also contain a brake release shuttle valve which ensures that pressure is applied to a brake release circuit regardless of whether pressure is applied to ports "A" or "B". These multifunction valves are normally used for the static and dynamic control of systems using motors or semi-rotaryactuators.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot ratios

- 2.5:1 Best suited for extremely unstable applications such as long booms or flexible frameworks.
- 5:1 Best suited for applications where load varies (Standard) and machine structure can induce instability
- 10:1 Best suited for applications where the load remains relatively constant.

Performance data

Ratings and specifications



Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	30 L/min (8 USgpm)		
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)		
Cartridge material	Working parts hardened & ground steel External surface zinc plated		
Body material	Standard aluminium (up to 210 bar*) Steel (up to 350 bar)		
Mounting position	Unrestricted		
Cavity Number	A6610 (See section M)		
Torque cartridge into cavity	45 Nm (33 lbs ft)		
Weight (inc cartridges)	1CESHHT35	2.29 kg (5.04 lbs)	
	1CEESHHT35	2.34 kg (5.15 lbs)	
Seal kit number	1CESHHT35	9900828-000 (Buna-N)	9900829-000 (Viton)
	1CEESHHT35	9900828-000 (Buna-N)	9900829-000 (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)		
Operating Temp	-30°C to +90°C (-22° to 194°F)		
Leakage	0.3 milliL/min nominal (5 dpm)		
Nominal viscosity range	5 to 500 cSt		
Installation Kit (includes cap screws, washers, and o-rings)	9900834-000 (Buna-N) 9900835-000 (Viton)		

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICESHHT35/ICEESHHT35 - Motor mounted valves

H & T mounting pattern single and dual overcenter valve with brake release shuttle

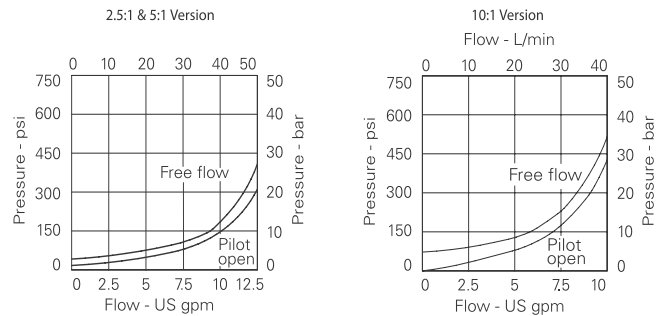

1 Basic code

1CEESHHT35 – Double Cartridge and Body
1CESHHT35*A – Single overcenter in line A-“A”
1CESHHT35*B – Single overcenter in line B-“B”

2 Adjustment means

F – Screw Adjustment

3 Housing material

A – Aluminum
S – Steel

4

Code	Port size		Dual housing number	
	“A” & “B”	Brake	Aluminum	Steel
4W	1/2” BSP	1/4” BSP	6025216-001	6025216-003
10H	SAE 10	SAE 4	6025216-002	
10T	SAE 10	SAE 4		6025216-004

5 Port acted upon

A – A Port
B – B Port
AB – A & B Ports (dual)

6 Pressure range (cart A)

Note: Code Based on pressure in bar.
20 – (2.5:1 and 5:1): 70-210 bar. Std setting 100 bar.
 (10:1): 100-210 bar. Std setting 100 bar.
35 – (2.5:1 and 5:1): 100-350 bar. Std setting 210 bar. (10:1):
 120-350 bar. Std setting 210 bar.

7 Pressure setting (cart A)

0 – Std factory setting
1500 – 1500 psi

8 Pressure range (cart B)

Note: Code Based on pressure in bar.
20 – (2.5:1 and 5:1): 70-210 bar. Std setting 100 bar.
 (10:1): 100-210 bar. Std setting 100 bar.
35 – (2.5:1 and 5:1): 100-350 bar. Std setting 210 bar.
 (10:1): 120-350 bar. Std setting 210 bar.

9 Pressure setting (cart B)

0 – Std factory setting
1500 – 1500 psi

10 Seals


S – Buna-N
SV – VitoN

11 Pilot ratio

2 – 2.5:1
5 – 5:1
10 – 10:1

Cavity plug part number

Nitrile
 AXP13032-01-N
 AXP13032-01-V

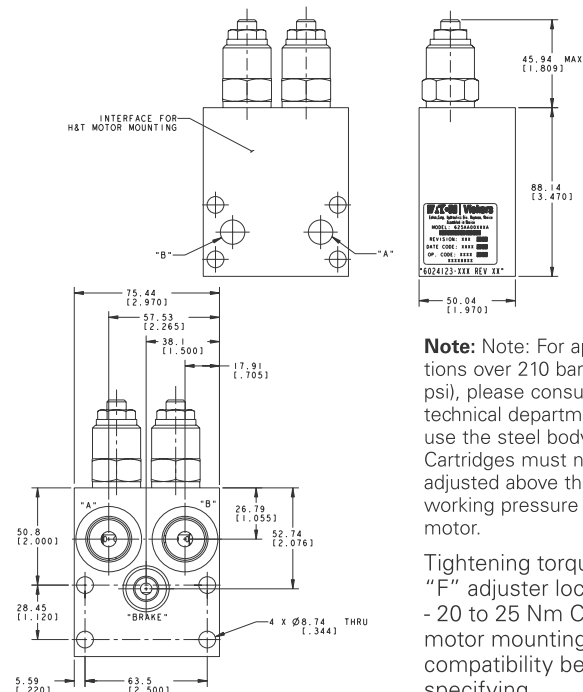


Note: Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option. Cartridges must not be adjusted above the safe working pressure of the motor.

Tightening torque of “F” adjuster locknut - 20 to 25 Nm Check motor mounting compatibility before specifying.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.


1CESH2K95/1CEESH2K95 - Motor mounted valves

2k mounting pattern single and dual overcenter valves with brake release shuttle




"A" Brake "B"

1CESH2K95*A



"A" Brake "B"

1CESH2K95*A



"A" Brake "B"

1CEESH2K95

Description

Overcenter Valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

These dual overcenter valves also contain a brake release shuttle valve which ensures that pressure is applied to a brake release circuit regardless of whether pressure is applied to ports "A" or "B". These multifunction valves are normally used for the static and dynamic control of systems using motors or semi-rotary actuators.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot Ratios

4:1 Best suited for applications where load varies and machine structure can induce instability

8:1 Best suited for applications where the load remains relatively constant.

Other ratios available upon request

Performance data

Ratings and specifications




Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	90 L/min (23 USgpm)		
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)		
Cartridge material	Working parts hardened & ground steel External surface zinc plated		
Body material	Standard aluminium (up to 210 bar*) Steel (up to 350 bar)		
Mounting position	Unrestricted		
Cavity Number	A12336 (See section M)		
Torque cartridge into cavity	60 Nm (44 lbs ft)		
Weight (inc cartridges)	1CESH2K95	2.32 kg (5.10 lbs)	
	1CEESH2K95	2.42 kg (5.32 lbs)	
Seal kit number	1CESH2K95	9900826-000 (Buna-N)	9900827-000 (Viton)
	1CEESH35	9900826-000 (Buna-N)	9900827-000 (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)		
Operating Temp	-30°C to +90°C (-22° to 194°F)		
Leakage	0.3 millil/min nominal (5 dpm)		
Nominal viscosity range	5 to 500 cSt		
Installation Kit (includes cap screws, washers, and o-rings)	9900830-000 (Buna-N) 9900831-000 (Viton)		

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICESH2K95/ICEESH2K95 - Motor mounted valves

2k mounting pattern single and dual overcenter valves with brake release shuttle



Description

Overcenter Valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

These dual overcenter valves also contain a brake release shuttle valve which ensures that pressure is applied to a brake release circuit regardless of whether pressure is applied to ports "A" or "B". These multifunction valves are normally used for the static and dynamic control of systems using motors or semi-rotary actuators.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

Performance data

Ratings and specifications


Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	90 L/min (23 USgpm)		
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)		
Cartridge material	Working parts hardened & ground steel External surface zinc plated		
Body material	Standard aluminium (up to 210 bar*) Steel (up to 350 bar)		
Mounting position	Unrestricted		
Cavity Number	A12336 (See section M)		
Torque cartridge into cavity	60 Nm (44 lbs ft)		
Weight (inc cartridges)	1CESH2K95	2.32 kg	(5.10 lbs)
	1CEESH2K95	2.42 kg	(5.32 lbs)
Seal kit number	1CESH2K95	9900834-000(Buna-N)	9900835-000 (Viton)
	1CEESH2K95	9900836-000 (Buna-N)	9900837-000 (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)		
Operating Temp	-30°C to +90°C (-22° to 194°F)		
Leakage	0.3 millil/min nominal (5 dpm)		
Nominal viscosity range	5 to 500 cSt		
Installation Kit (includes cap screws, washers, and o-rings)	9900828-000 (Buna-N) 9900829-000 (Viton)		

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICLLROMPI 50 - Motor mounted relief

150 L/min (40 USgpm) 350 bar (5000 psi)



Operation

Pressure acts over one of two differential areas forcing the poppet back allowing relief flow to the other port. This being a single cartridge is ideal for mounting on to a motor in a special housing.

Features

Single cartridge relieving in both directions cutting down space requirements, giving full adjustment through its range on both pressures at the same time.

Performance data

Ratings and specifications

Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)


Rated Flow	150 L/min (40 USgpm)
Max Setting	350 bar (5000 psi)
Cartridge Material	Working parts hardened and ground steel. External steel surfaces black oxide.
Body Material	Standard aluminium (up to 210 bar*) Add Suffix '377' for steel option
Mounting Position	Unrestricted
Cavity Number	A878 (See Section M)
Torque Cartridge into Cavity	60 Nm (44 lbs ft)
Weight	1.46 kg (3.21 lbs)
Seal Kit Number	SK1280 (Nitrile) SK1280V (Viton)
Recommended Filtration Level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	5 millil/min
Nominal Viscosity Range	5 to 500 cSt

Description

This is a direct acting bi-directional relief valve designed to protect both lines in a circuit from over pressurization by relieving oil to the other line. Ideal for use with motors or directional valves as an emergency relief. Differential area, fast acting, poppet valve.

Pressure drop

Cartridge only

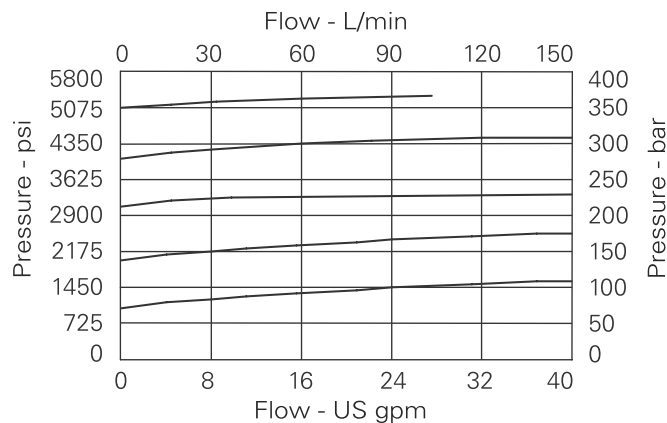


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICLLROMP150 - Motor mounted relief

150 L/min (40 USgpm) 350 bar (5000 psi)

Model code



1 Basic code

1CLLROMP150 - Cartridge and Body

3 Port size

Code	Port size	Housing number
4W	1/2" BSP	AXP24058-4W-S

6 Mounting

BK - Bolt Kit

2 Adjustment means

F - Screw Adjustment

4 Adjustable pressure range

Note: Code based on pressure in bar.
35 - 114-350 bar. Std setting 280 bar*
 Std setting made at 14 L/min

* Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile
 (For use with most industrial hydraulic oils)


SV - Viton
 (For high temperature and most special fluid applications)

Dimensions

mm (inch)

Tightening torque of "F" adjuster locknut - 20 to 25 Nm


Notes: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.

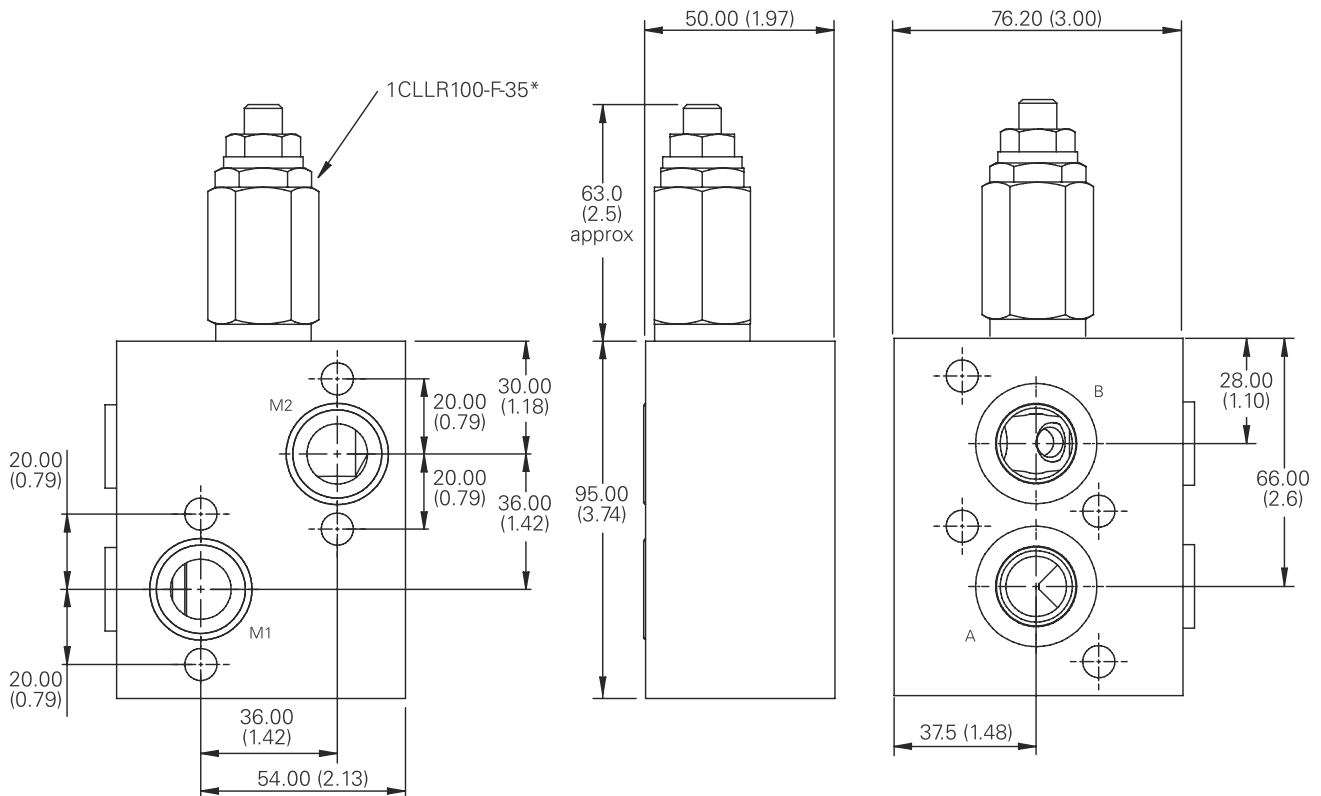

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICLLROMS150 - Motor mounted relief

150 L/min (40 USgpm) 350 bar (5000 psi)



Operation

Pressure acts over one of two differential areas forcing the poppet back allowing relief flow to the other port. This being a single cartridge is ideal for mounting on to a motor in a special housing.

Features

Single cartridge relieving in both directions cutting down space requirements, giving full adjustment through its range on both pressures at the same time.

Performance data

Ratings and specifications

Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)


Rated Flow	150 L/min (40 USgpm)
Max Setting	350 bar (5000 psi)
Cartridge Material	Working parts hardened and ground steel. External steel surfaces black oxide.
Body Material	Standard aluminium (up to 210 bar*) Add Suffix '377' for steel option
Mounting Position	Unrestricted
Cavity Number	A878 (See Section M)
Torque Cartridge into Cavity	60 Nm (44 lbs ft)
Weight	1.46 kg (3.21 lbs)
Seal Kit Number	SK1280 (Nitrile) SK1280V (Viton)
Recommended Filtration Level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	5 millil/min
Nominal Viscosity Range	5 to 500 cSt

Description

This is a direct acting bi-directional relief valve designed to protect both lines in a circuit from over pressurization by relieving oil to the other line. Ideal for use with motors or directional valves as a emergency relief. Differential area, fast acting, poppet valve.

Pressure drop

Cartridge only

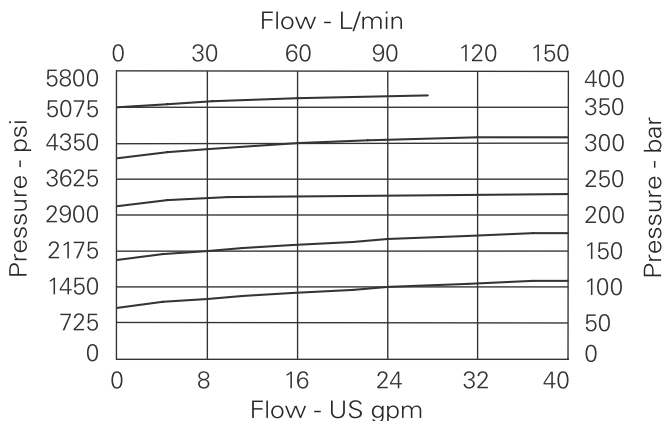


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CLLROMS150 - Motor mounted relief

150 L/min (40 USgpm) 350 bar (5000 psi)

Model code



1 Basic code

1CLLROMS150 - Cartridge and Body

2 Adjustment means

F - Screw Adjustment

3 Port size

Code	Port size	Housing number
4W	1/2" BSP	AXP24059-4W-S

4 Adjustable pressure range

Note: Code based on pressure in bar.

35 - 114-350 bar. Std setting 280 bar*

Std setting made at 14 L/min

* Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile
(For use with most industrial hydraulic oils)

SV - Viton
(For high temperature and most special fluid applications)

6 Mounting


BK - Bolt Kit

Dimensions

mm (inch)

Tightening torque of "F" adjuster locknut - 20 to 25 Nm


Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.

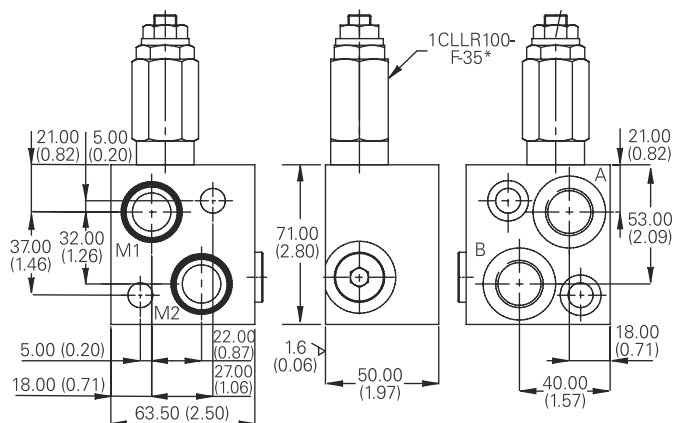


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CEOMP35/1CEEOMP35 - Motor mounted valves


OMP mounting pattern single and dual overcenter valves



1CEOMP35-1



1CEOMP35-2

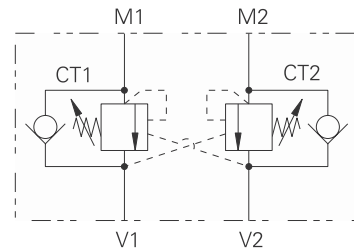

1CEEOMP35

Description

Overcenter valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

The overcenter cartridge is ideal for mounting directly into a cavity machined in the body of the cylinder, motor or rotary actuator. The cartridge can also be mounted directly to the ports via a specifically machined body as part of a Hydraulic Integrated Circuit or single unit, or contained within one of our standard line bodies.

Single overcenter valves are normally used when the load is unidirectional, for example an aerial platform or crane and dual overcenter valves are used for controlling loads in both directional for motor applications or for cylinders going over center.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot Ratios

- 2.5:1 Best suited for extremely unstable applications such as long booms or flexible frameworks.
- 5:1 Best suited for applications where load varies (Standard) and machine structure can induce instability
- 10:1 Best suited for applications where the load remains relatively constant.

Performance data

Ratings and specifications


Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	30 L/min (8 USgpm)
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)
Cartridge material	Working parts hardened & ground steel External surface zinc plated
Body material	Standard aluminium (up to 210 bar*) Add suffix '377' for steel option
Mounting position	Unrestricted
Cavity Number	A6610 (See section M)
Torque cartridge into cavity	45 Nm (33 lbs ft)
Weight (inc cartridges)	1CEOMP35 1.6 kg (3.52 lbs) 1CEEOMP35 1.66 kg (3.65 lbs)
Seal kit number	1CEOMP35 SK1285 (Nitrile) SK1285V (Viton) 1CEEOMP35 SK1284 (Nitrile) SK1284V (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	0.3 milliL/min nominal (5 dpm)
Nominal viscosity range	5 to 500 cSt


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICEHT35/ICEHT35 - Motor mounted valves


H & T Mounting pattern single and dual overcenter valves



1CEHT35*A



1CEHT35*B



1CEEHT35

Description

Overcenter valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid. The overcenter cartridge is ideal for mounting directly into a cavity machined in the body of the cylinder, motor or rotary actuator.

The cartridge can also be mounted directly to the ports via a specifically machined body as part of a Hydraulic Integrated Circuit or single unit, or contained within one of our standard line bodies.

Single overcenter valves are normally used when the load is unidirectional, for example an aerial platform or crane and dual overcenter valves are used for controlling loads in both directional for motor applications or for cylinders going over center.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot Ratios

- 2.5:1 Best suited for extremely unstable applications such as long booms or flexible frameworks.
- 5:1 Best suited for applications where load varies (Standard) and machine structure can induce instability
- 10:1 Best suited for applications where the load remains relatively constant.

Performance data

Ratings and specifications



Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	30 L/min (8 USgpm)		
Max setting	Max load induced		
	Pressure: 270 bar (4000 psi)		
	Relief setting: 350 bar (5000 psi)		
Cartridge material	Working parts hardened & ground steel External surface zinc plated		
Body material	Standard aluminium (up to 210 bar*) Steel (up to 350 bar)		
Mounting position	Unrestricted		
Cavity Number	A6610 (See section M)		
Torque cartridge into cavity	45 Nm (33 lbs ft)		
Weight (inc cartridges)	1CEOMP35	1.6 kg	(3.52 lbs)
	1CEEOMP35	1.66 kg	(3.65 lbs)
Seal kit number	1CEHT35	9900834-000 (Buna-N)	9900835-000 (Viton)
	1CEEHT35	9900836-000 (Buna-N)	9900837-000 (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)		
Operating Temp	-30°C to +90°C (-22° to 194°F)		
Leakage	0.3 millil/min nominal (5 dpm)		
Nominal viscosity range	5 to 500 cSt		
Installation Kit (includes cap screws, washers, and o-rings)	9900828-000 (Buna-N)		
	9900829-000 (Viton)		

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CEHT35/1CEEHT35 - Motor mounted valves

H & T Mounting pattern single and dual overcenter valves

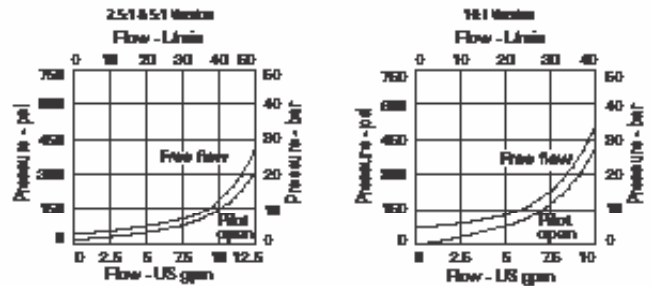

1 Basic code

1CEEHT35 - Double Cartridge and Body
1CEHT35* - ASingle overcenter in line A-"A"
1CEHT35* - BSingle overcenter in line B-"B"

2 Adjustment means

F - Screw Adjustment

3 Housing material

A - Aluminum
S - Steel

4

Code	Port size	Dual housing number	
	"A" & "B"	Aluminum	Steel
4W	1/2" BSP	6024221-001	6024221-003
10H	SAE 10	6024221-002	
10T	SAE 10		6024221-04

5 Port acted upon

A - A Port
B - B Port
AB - A & B Ports (dual)

6 Pressure range (Cart A)

Note: Code Based on pressure in bar.
20 - (2.5:1 and 5:1): 70-210 bar. Std setting 100 bar.
 (10:1): 100-210 bar. Std setting 100 bar.
35 - (2.5:1 and 5:1): 100-350 bar. Std setting 210 bar.
 (10:1): 120-350 bar. Std setting 210 bar.

7 Pressure setting (Cart A)

0 - Std factory setting
1500 - 1500 psi

8 Pressure range (Cart B)

Note: Code Based on pressure in bar.
20 - (2.5:1 and 5:1): 70-210 bar. Std setting 100 bar.
 (10:1): 100-210 bar. Std setting 100 bar.
35 - (2.5:1 and 5:1): 100-350 bar. Std setting 210 bar.
 (10:1): 120-350 bar. Std setting 210 bar.

9 Pressure setting (Cart B)

0 - Std factory setting
1500 - 1500 psi

10 Seals


S - Buna-N
SV - VitoN

11 Pilot ratio

4 - 4:1
8 - 8:1
10 - 8:1

Cavity plug part number

Nitrile
 AXP13032-01-N
 AXP13032-01-V

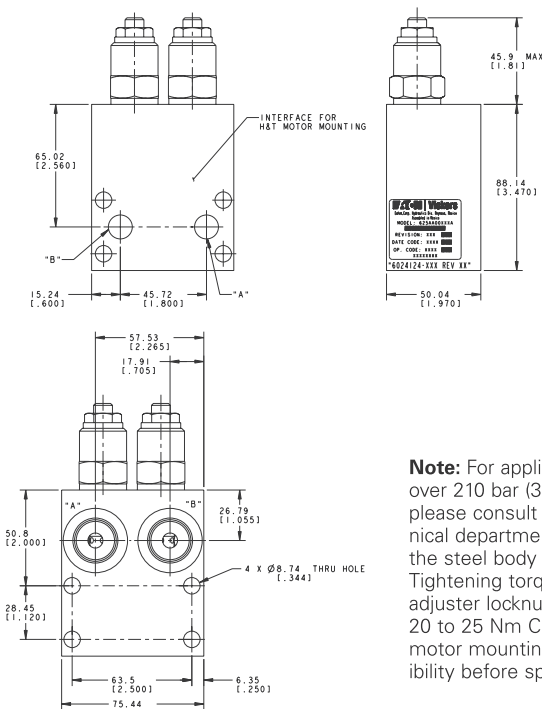


Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option. Tightening torque of "F" adjuster locknut - 20 to 25 Nm Check motor mounting compatibility before specifying.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICE2K95/ICEE2K95 - Motor mounted valves

2K Mounting pattern single and dual overcenter valves

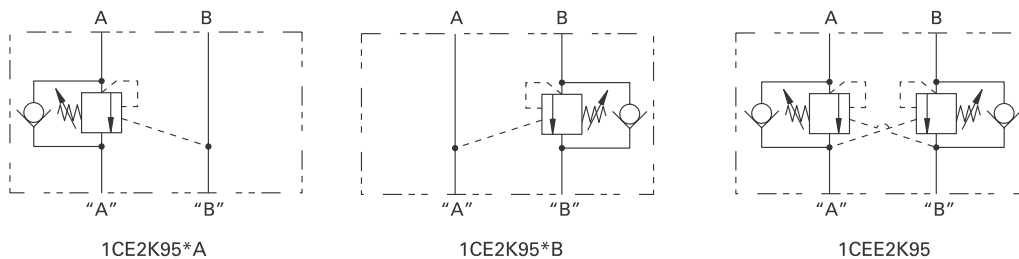

Description

Overcenter valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

The overcenter cartridge is ideal for mounting directly into a cavity machined in the body of the cylinder, motor or rotary actuator. The cartridge can also be mounted directly to the ports via a specifically machined body as part of a Hydraulic Integrated Circuit or single unit, or contained within one of our standard line bodies.

Single overcenter valves are normally used when the load is unidirectional, for example an aerial platform or crane and dual overcenter valves are used for controlling loads in both directional for motor applications or for cylinders going over center.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot Ratios

- 4:1 Best suited for applications where load varies and machine structure can induce instability
 - 8:1 Best suited for applications where the load remains relatively constant.
- Other ratios available upon request

Performance data

Ratings and specifications



Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)

Rated flow	90 L/min (23 USgpm)		
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)		
Cartridge material	Working parts hardened & ground steel External surface zinc plated		
Body material	Standard aluminium (up to 210 bar*) Steel (up to 350 bar)		
Mounting position	Unrestricted		
Cavity Number	A12336 (See section M)		
Torque cartridge into cavity	60 Nm (44 lbs ft)		
Weight (inc cartridges)	1CE2K95	2.16 kg (4.75 lbs)	
	1CEE2K95	2.26 kg (4.97 lbs)	
Seal kit number	1CE2K95	9900826-000 (Buna-N)	9900827-000 (Viton)
	1CEE2K95	9900826-000 (Buna-N)	9900827-000 (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)		
Operating Temp	-30°C to +90°C (-22° to 194°F)		
Leakage	0.3 millil/min nominal (5 dpm)		
Nominal viscosity range	5 to 500 cSt		
Installation Kit (includes cap screws, washers, and o-rings)	9900830-000 (Buna-N) 9900831-000 (Viton)		

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICE2K95/ICEE2K95 - Motor mounted valves

2K Mounting pattern single and dual overcenter valves

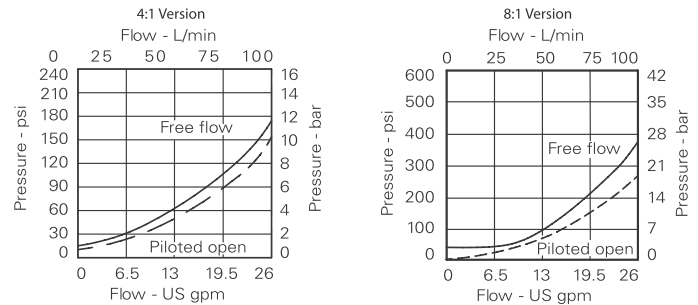

1 Basic code

1CEE2K95 Double Cartridge and Body
1CE2K95*A Single overcenter in line A-"A"
1CE2K95*B Single overcenter in line B-"B"

2 Adjustment means

F – Screw Adjustment

3 Housing material

A – Aluminum
S – Steel

4

Code	Port size "A" & "B"	Dual housing number	
		Aluminum	Steel
4W	1/2" BSP	6025185-001	6025185-003
10H	SAE 10	6025185-002	
10T	SAE 10		6025185-004

5 Port acted upon

A – A Port
B – B Port
AB – A & B Ports (dual)

6 Pressure range (cart A)

Note: Code Based on pressure in bar.
20 – 70-225 bar. Std setting 100 bar.
35 – 200-350 bar. Std setting 210 bar.

7 Pressure setting (cart A)

0 – Std factory setting
1500 – 1500 psi

8 Pressure range (cart B)

Note: Code Based on pressure in bar.
20 – 70-225 bar. Std setting 100 bar.
35 – 200-350 bar. Std setting 210 bar.

9 Pressure setting (cart B)

0 – Std factory setting
1500 – 1500 psi

10 Seals


S – Buna-N
SV – Viton

11 Pilot ratio

4 – 4:1
8 – 8:1

Cavity plug part number

Nitrile
 AXP14434-02-N
 Viton
 AXP14434-02-V

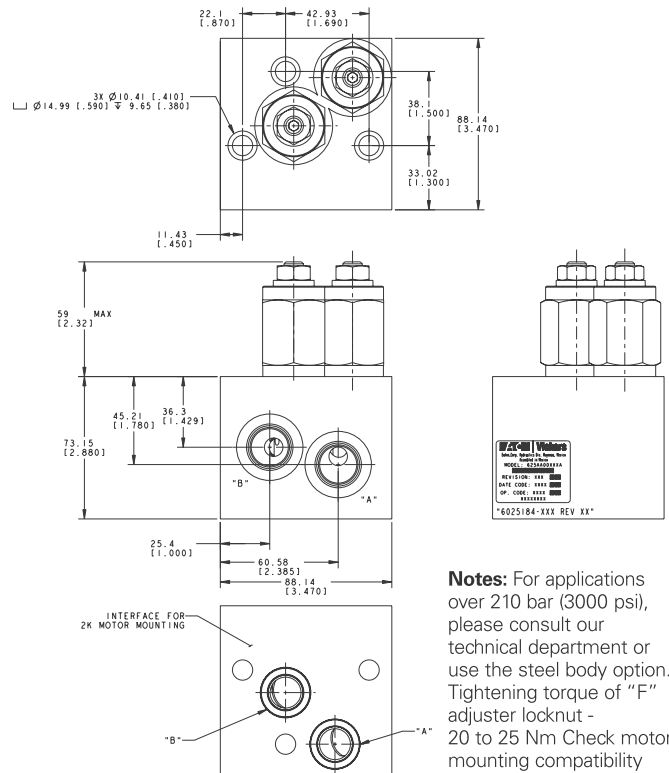


Notes: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option. Tightening torque of "F" adjuster locknut - 20 to 25 Nm Check motor mounting compatibility before specifying.


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICEOMS95/ICEEOMS95 - Motor mounted valves


OMS Mounting pattern single and dual overcenter valves



1CEOMS95-1



1CEOMS95-2

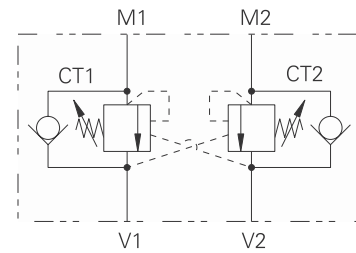

1CEEOMS95

Description

Overcenter valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

The overcenter cartridge is ideal for mounting directly into a cavity machined in the body of the cylinder, motor or rotary actuator. The cartridge can also be mounted directly to the ports via a specifically machined body as part of a Hydraulic Integrated Circuit or single unit, or contained within one of our standard line bodies.

Single overcenter valves are normally used when the load is unidirectional, for example an aerial platform or crane and dual overcenter valves are used for controlling loads in both directional for motor applications or for cylinders going over center.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot Ratios

- 4:1 Best suited for applications where load varies and machine structure can induce instability
- 8:1 Best suited for applications where the load remains relatively constant.

Other ratios available upon request

Performance data

Ratings and specifications

Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)



Rated flow	90 L/min (23 USgpm)
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)
Cartridge material	Working parts hardened & ground steel External surface zinc plated
Body material	Standard aluminium (up to 210 bar*) Add suffix '377' for steel option
Mounting position	Unrestricted
Cavity Number	A12336 (See section M)
Torque cartridge into cavity	60 Nm (44 lbs ft)
Weight (inc cartridges)	1CEOMS95 2.16 kg (4.75 lbs) 1CEEOMS95 2.26 kg (4.97 lbs)
Seal kit number	1CEOMS95 SK1282 (Nitrile) SK1282V (Viton) 1CEEOMS95 SK795 (Nitrile) SK795V (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	0.3 millil/min nominal (5 dpm)
Nominal viscosity range	5 to 500 cSt

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CEOMP35/1CEEOMP35 - Motor mounted valves

OMP Mounting pattern single and dual overcenter valves

Pressure drop

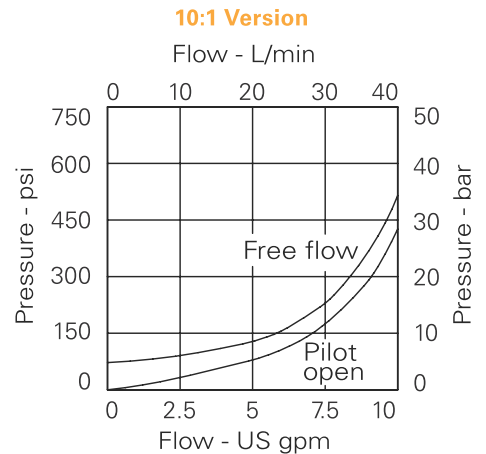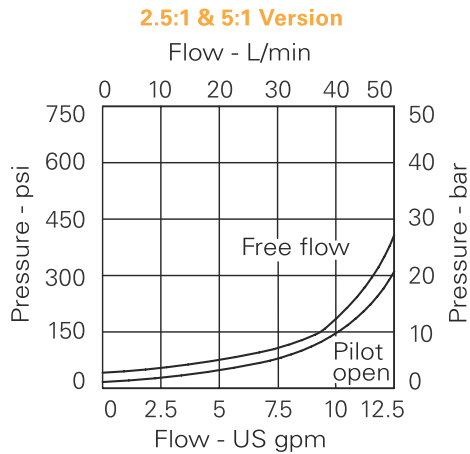

Model code

1CE*OMP35-* - F 4W - 35 S 5 BK

1 2 3 4 5 6 7

1 Basic code

1CEEOMP35 - Double Cartridge and Body
1CEOMP35-1 - Single overcenter in line V1-M1
1CEOMP35-2 - Single overcenter in line V2-M2

2 Adjustment means

F - Screw Adjustment

3 Port size

Code	Port size	Housing number
4W	1/2" BSPP	BXP24052-4W-S

4 Pressure range

Note: Code based on pressure in bar.

20 -(2.5:1 and 5:1): 70-210 bar.

Std setting 100 bar

(10:1): 100-210 bar.

Std setting 100 bar

35 -(2.5:1 and 5:1): 100-350 bar.

Std setting 210 bar

(10:1): 120-350 bar.

Std setting 210 bar

Std setting made at 4.8 L/min

* Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile

(For use with most industrial hydraulic oils)

SV - Viton

(For high temperature and most special fluid applications)

6 Pilot ratio

2 - 2.5:1

5 - 5:1

10 - 10:1

7 Mounting

BK - Bolt Kit

Cavity plug part number

Nitrile
 AXP13032-01-N


Viton
 AXP13032-01-V

Dimensions

mm (inch)

Complete Valve 1/2" Ports

Basic Code: 1CEEOMP35

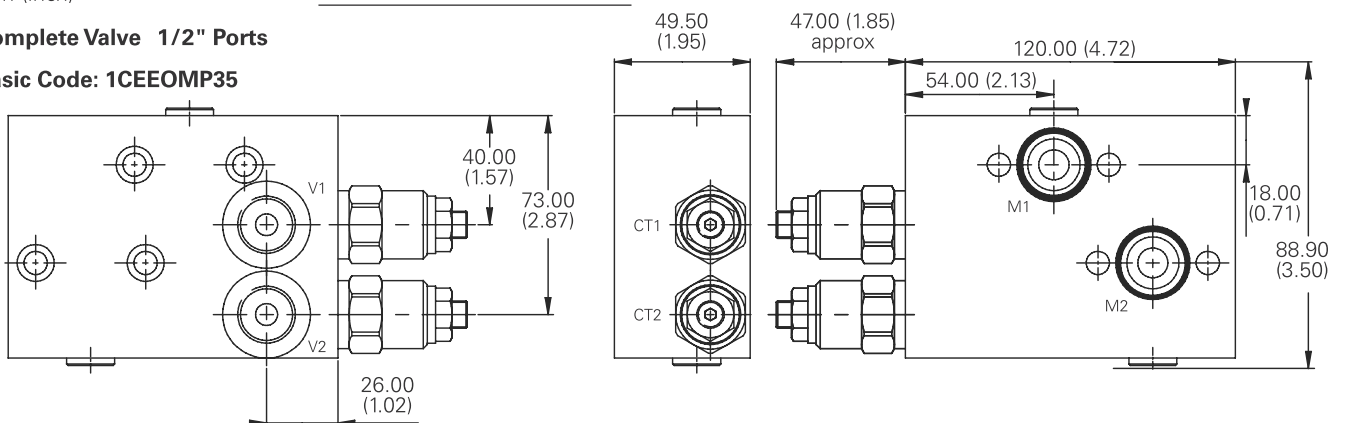

2 overcentre valves
 1CE30-F**-*-*

Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.

Tightening torque of "F" adjuster locknut - 20 to 25 Nm


Check motor mounting compatibility before specifying.

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICEOMS95/ICEEOMS95 - Motor mounted valves

OMS Mounting pattern single and dual overcenter valves

Pressure drop

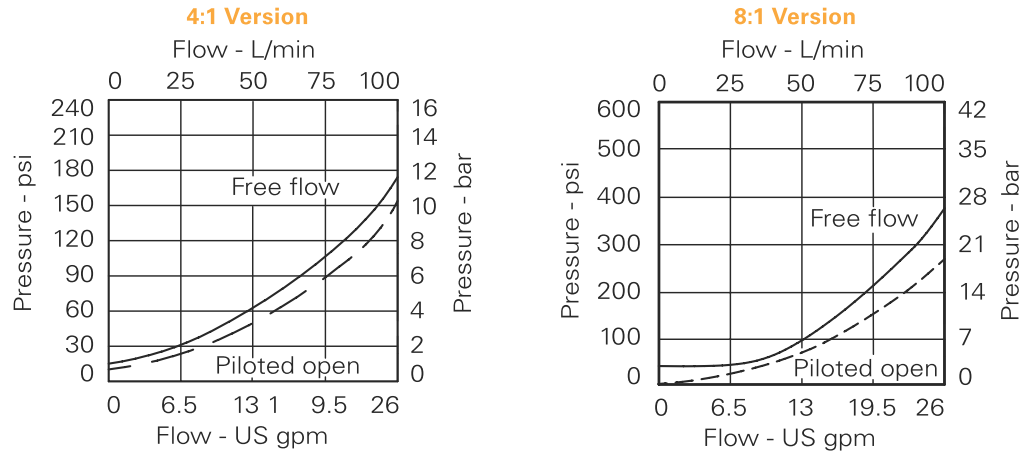

Model code

1 **2** **3** **4** **5** **6** **7**

1CE*OMS95-* - F 4W - 35 S 4 BK

1 Basic code



1CEEOMS95 - Double Cartridge and Body
1CEOMS95-1 - Single overcenter in line V1-M1
1CEOMS95-2 - Single overcenter in line V2-M2

2 Adjustment means

F - Screw Adjustment

Dimensions

mm (inch)

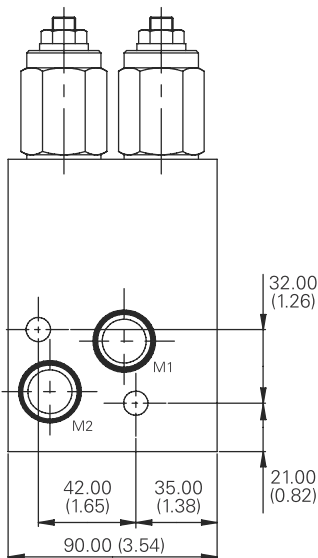

3 Port size

Code	V1 & V2	Brake	Housing number
4W	1/2" BSPP	1/4" BSPP	BXP24055-4W-S

4 Pressure range

Note: Code based on pressure in bar.

20 -70-225 bar.
Std setting 100 bar

35 -200-350 bar.
Std setting 210 bar

Std setting made at 4.8 L/min
 * Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile
(For use with most industrial hydraulic oils)

SV - Viton
(For high temperature and most special fluid applications)

6 Pilot ratio

4	-	4:1
8	-	8:1

7 Mounting


BK - Bolt Kit

Cavity plug part number

Nitrile
AXP14434-02-N

Viton
AXP14434-02-V

Complete Valve 1/2" Ports Basic Code: 1CEEOMS95

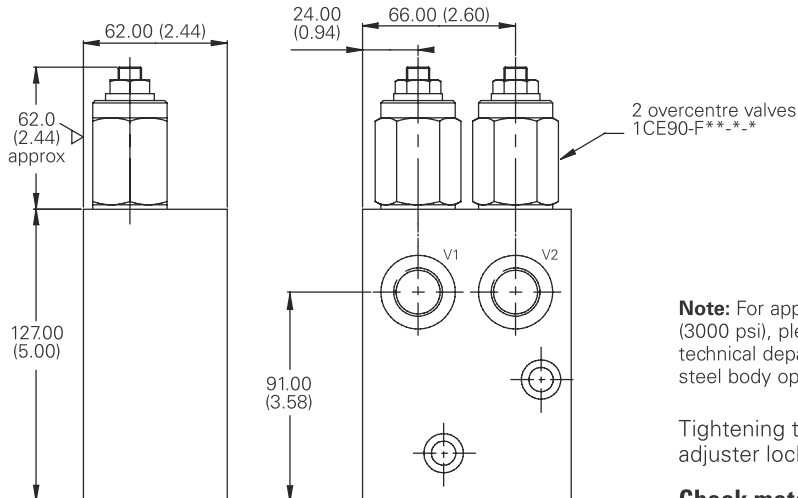

Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.


Tightening torque of "F" adjuster locknut - 20 to 25 Nm

Check motor mounting compatibility before specifying.


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

1CESHOMP35/1CEESHOMP35 - Motor mounted valves


OMP Mounting pattern single and dual overcenter valve with brake release shuttle



1CESHOMP35-1



1CESHOMP35-2



1CEESHOMP35

Description

Overcenter Valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

These dual overcenter valves also contain a brake release shuttle valve which ensures that pressure is applied to a brake release circuit regardless of whether pressure is applied to ports V1 or V2. These multifunction valves are normally used for the static and dynamic control of systems using motors or semi-rotary actuators.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

- The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot ratios

- 2.5:1 Best suited for extremely unstable applications such as long booms or flexible frameworks.
- 5:1 Best suited for applications where load varies (Standard) and machine structure can induce instability
- 10:1 Best suited for applications where the load remains relatively constant.

Performance data

Ratings and specifications

Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)


Rated flow	30 L/min (8 USgpm)
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)
Cartridge material	Working parts hardened & ground steel External surface zinc plated
Body material	Standard aluminium (up to 210 bar*) Add suffix '377' for steel option
Mounting position	Unrestricted
Cavity Number	A6610 (See section M)
Torque cartridge into cavity	45 Nm (33 lbs ft)
Weight (inc cartridges)	1CESHOMP35 2.29 kg (5.04 lbs) 1CEESHOMP35 2.34 kg (5.15 lbs)
Seal kit number	1CESHOMP35 SK1285 (Nitrile) SK1285V (Viton) 1CEESHOMP35 SK1284 (Nitrile) SK1284V (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	0.3 milliL/min nominal (5 dpm)
Nominal viscosity range	5 to 500 cSt

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICESHOMP35/ICEESHOMP35 - Motor mounted valves

OMP Mounting pattern single and dual overcenter valve with brake release shuttle

Pressure drop

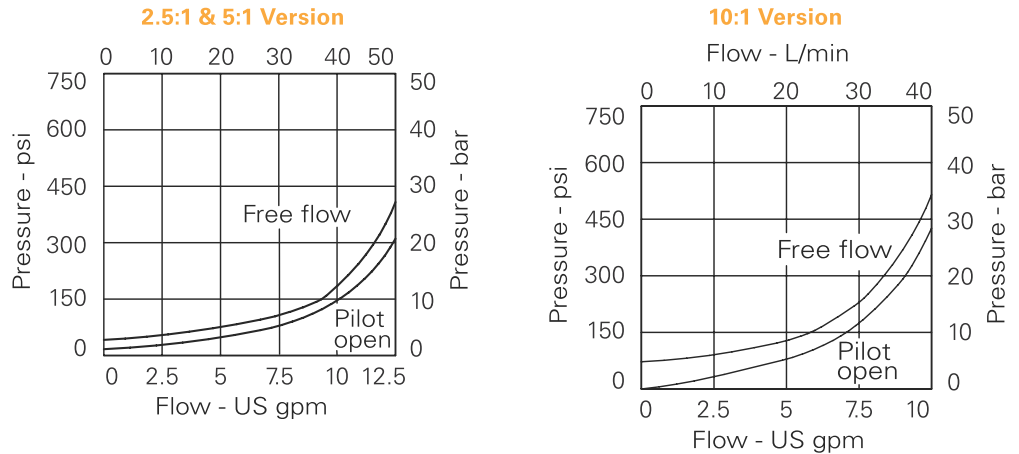

Model code

1CE*SHOMP35-* - F 4W - 35 S 5 BK

1 2 3 4 5 6 7

1 Basic code

1CEESHOMP35 - Double Cartridge and Body

1CESHOMP35-1 - Single overcenter in line V1-M1

1CESHOMP35-2 - Single overcenter in line V2-M2

2 Adjustment means

F - Screw Adjustment

3 Port size

Code	V1 & V2	Brake	Housing number
4W	1/2" BSPP	1/4" BSPP	BXP24053-4W-S

4 Pressure range

Note: Code based on pressure in bar.

20 -(2.5:1 and 5:1): 70-210 bar.

Std setting 100 bar

(10:1): 100-210 bar.

Std setting 100 bar

35 -(2.5:1 and 5:1): 100-350 bar.

Std setting 210 bar

(10:1): 120-350 bar.

Std setting 210 bar

Std setting made at 4.8 L/min

* Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile

(For use with most industrial hydraulic oils)

SV - Viton

(For high temperature and most special fluid applications)

6 Pilot ratio

2 - 2.5:1

5 - 5:1

10 - 10:1

7 Mounting

BK - Bolt Kit

Cavity plug part number

Nitrile

AXP13032-01-N

Viton

AXP13032-01-V

Dimensions

mm (inch)


Complete Valve 1/2" Ports

Basic Code: 1CEESHOMP35

Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.

Tightening torque of "F" adjuster locknut - 20 to 25 Nm


Check motor mounting compatibility before specifying.

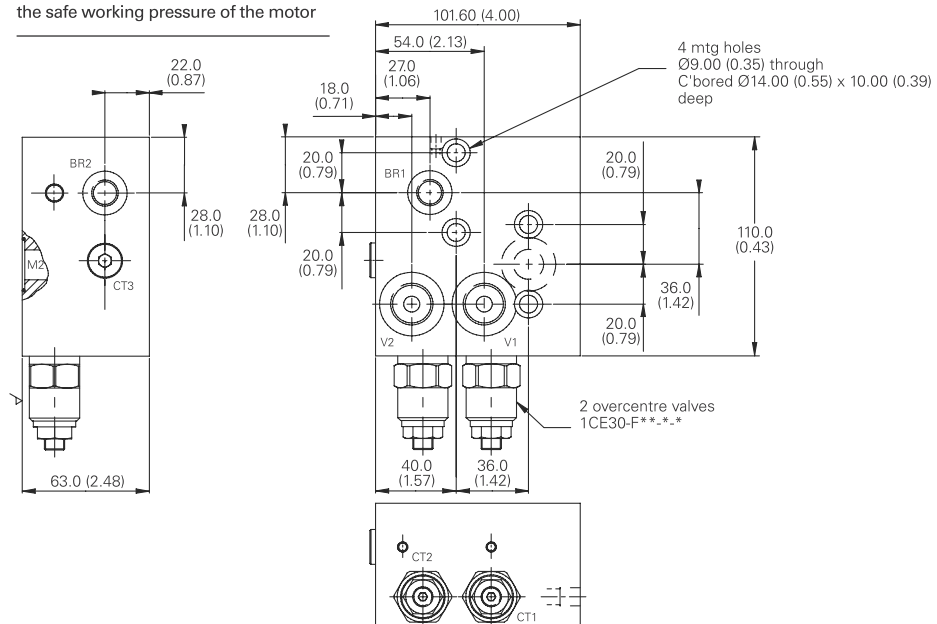


Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICESHOMS95/ICEESHOMS95 - Motor mounted valves


OMS Mounting pattern single and dual overcenter valves with brake release shuttle



1CESHOMS95-1



1CESHOMS95-2



1CEESHOMS95

Description

Overcenter Valves give static and dynamic control of loads by regulating the flow into and out of hydraulic actuators. When installed close to or within an actuator, the overcenter valve will stop runaway in the event of hose burst and if open center directional control valves are used, will allow thermal expansion relief of the hydraulic fluid.

These dual overcenter valves also contain a brake release shuttle valve which ensures that pressure is applied to a brake release circuit regardless of whether pressure is applied to ports V1 or V2. These multifunction valves are normally used for the static and dynamic control of systems using motors or semi-rotary actuators.

Operation

The check section allows free flow into the actuator then holds and locks the load against movement. The pilot assisted relief valve section will give controlled movement when pilot pressure is applied. The relief section is normally set to open at a pressure at least 1.3 times the maximum load induced pressure but the pressure required to open the valve and allow movement depends on the pilot ratio of the valve. For optimization of load control and energy usage, a choice of pilot ratios is available.

The pressure required to open the valve and start actuator movement can be calculated as follows:

$$\text{Pilot Pressure} = \frac{(\text{Relief Setting}) - (\text{Load Pressure})}{\text{Pilot Ratio}}$$

Pilot ratios

- 4:1 Best suited for applications where load varies and machine structure can induce instability
- 8:1 Best suited for applications where the load remains relatively constant.

Other ratios available upon request

Performance data

Ratings and specifications

Figures based on: Oil Temp = 40°C Viscosity = 32 cSt (150 SUS)


Rated flow	90 L/min (23 USgpm)
Max setting	Max load induced Pressure: 270 bar (4000 psi) Relief setting: 350 bar (5000 psi)
Cartridge material	Working parts hardened & ground steel External surface zinc plated
Body material	Standard aluminium (up to 210 bar*) Add suffix '377' for steel option
Mounting position	Unrestricted
Cavity Number	A12336 (See section M)
Torque cartridge into cavity	60 Nm (44 lbs ft)
Weight (inc cartridges)	1CESHOMS95 2.32 kg (5.10 lbs) 1CEESHOMS95 2.42 kg (5.32 lbs)
Seal kit number	1CESHOMS95 SK1282 (Nitrile) SK1282V (Viton) 1CEESHOMS95 SK795 (Nitrile) SK795V (Viton)
Recommended filtration level	BS5540/4 Class 18/13 (25 micron nominal)
Operating Temp	-30°C to +90°C (-22° to 194°F)
Leakage	0.3 millil/min nominal (5 dpm)
Nominal viscosity range	5 to 500 cSt

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

ICESHOMS95/ICEESHOMS95 - Motor mounted valves

OMS Mounting pattern single and dual overcenter valves with brake release shuttle

Pressure drop

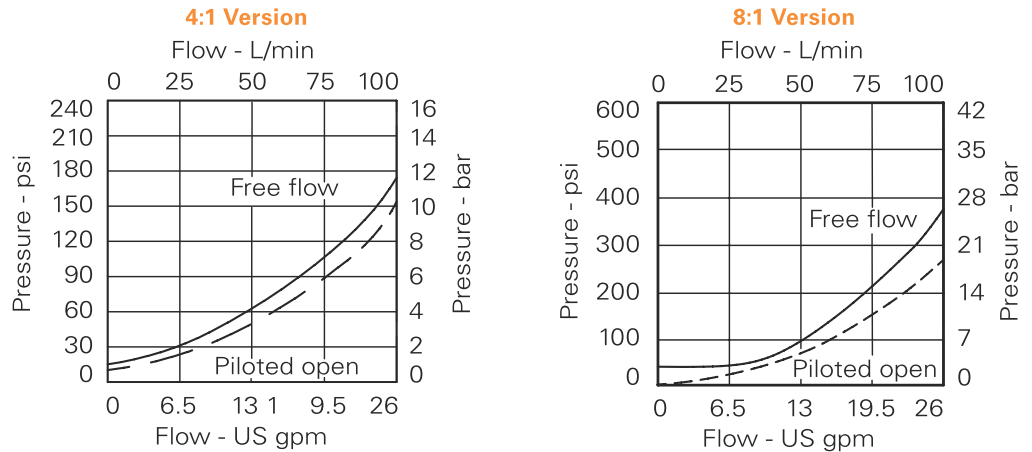

Model code

1CE*SHOMS95-* -F 4W - 35 S 4 BK

1 2 3 4 5 6 7

1 Basic code

1CEESHOMS95 - Double Cartridge and Body
1CESHOMS95-1 - Single overcenter in line V1-M1
1CESHOMS95-2 - Single overcenter in line V2-M2

2 Adjustment means

F - Screw Adjustment

3 Port size

Code	V1 & V2	Brake	Housing number
4W	1/2" BSPP	3/8" BSPP	BXP24056-4W-S

4 Pressure range

Note: Code based on pressure in bar.
20 - 70-225 bar. Std setting 100 bar
35 - 200-350 bar. Std setting 210 bar

Std setting made at 4.8 L/min
 * Cartridges must not be adjusted above the safe working pressure of the motor

5 Seals

S - Nitrile (For use with most industrial hydraulic oils)
SV - Viton (For high temperature and most special fluid applications)

6 Pilot ratio

4 - 4:1
8 - 8:1

7 Mounting

BK - Bolt Kit

Cavity plug part number

Nitrile
 AXP14434-02-N
Viton
 AXP14434-02-V

Dimensions


mm (inch)

Complete Valve 1/2" Ports
Basic Code: 1CEESHOMS35

Note: For applications over 210 bar (3000 psi), please consult our technical department or use the steel body option.

Tightening torque of "F" adjuster locknut - 20 to 25 Nm

Check motor mounting compatibility before specifying.

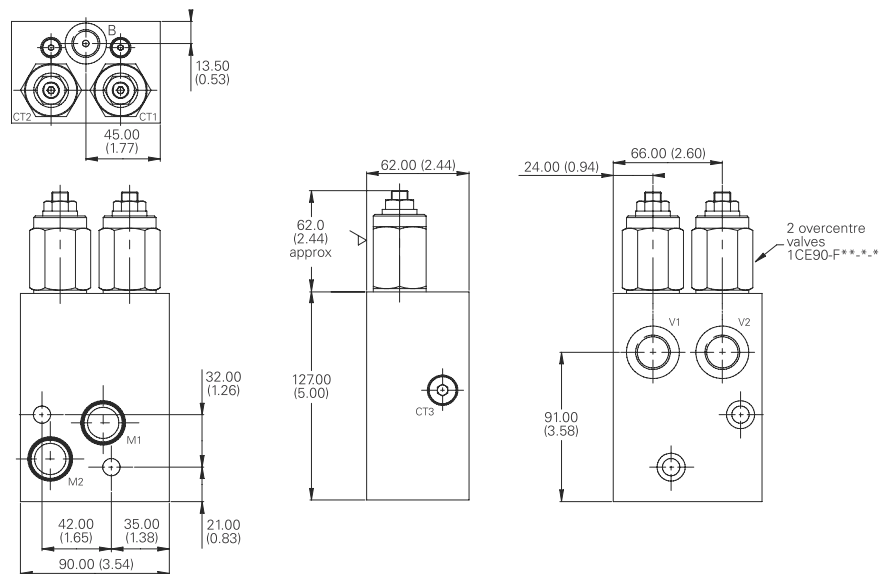

Where measurements are critical request certified drawings. We reserve the right to change specifications without notice.

For enquiries please contact our
Technical Sales Team directly;

Tim Daniels: 0400 665 388

Neal Tuituu: 0455 025 706

Alternatively contact us via
the office on **02 9938 5400**



HYDRAULIC CONTROLS Pty Ltd

+61 (02) 9938 5400 +61 (02) 9939 6132 customerservice@hydrauliccontrols.com.au
Hydraulic Controls Pty Ltd, 2 Grosvenor Place, PO Box 7462, Warringah Mall, NSW 2100, Australia

www.hydrauliccontrols.com.au
ABN: 86 000 997 240